Interactive version

atlas concorde

OUTDOOR

2025

atlas concorde

Outdoor 2025

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

atlas concorde

A system of indoor and outdoor surfaces: floors, walls and decors.

atlasPLAN

Large slabs for kitchen countertops, tables and for furnishings.

atlas concorde habitat

Furniture in combination with Atlas Concorde surfaces.

Three brands, one space.

Index

Size Index

Surface Range

Image Gallery

- STONE LOOK
- CONCRETE LOOK
- WOOD LOOK
- MARBLE LOOK

Product Range

Stone Look

- BOOST ICOR
- BOOST MINERAL
- BOOST MIX
- BOOST STONE
- BRAVE
- LIMS
- NORDE

Concrete Look

- BOOST
- BOOST PRO
- BOOST BALANCE
- BOOST EXPRESSION
- BOOST NATURAL
- BOOST NATURAL PRO
- PRISM

Wood Look

- LOG
- LOG CANSEI
- ENTICE
- ETIC PRO
- EXENCE

Marble Look

- MARVEL MERAVIGLIA
- MARVEL X
- MARVEL TRAVERTINE

Technical Specifications

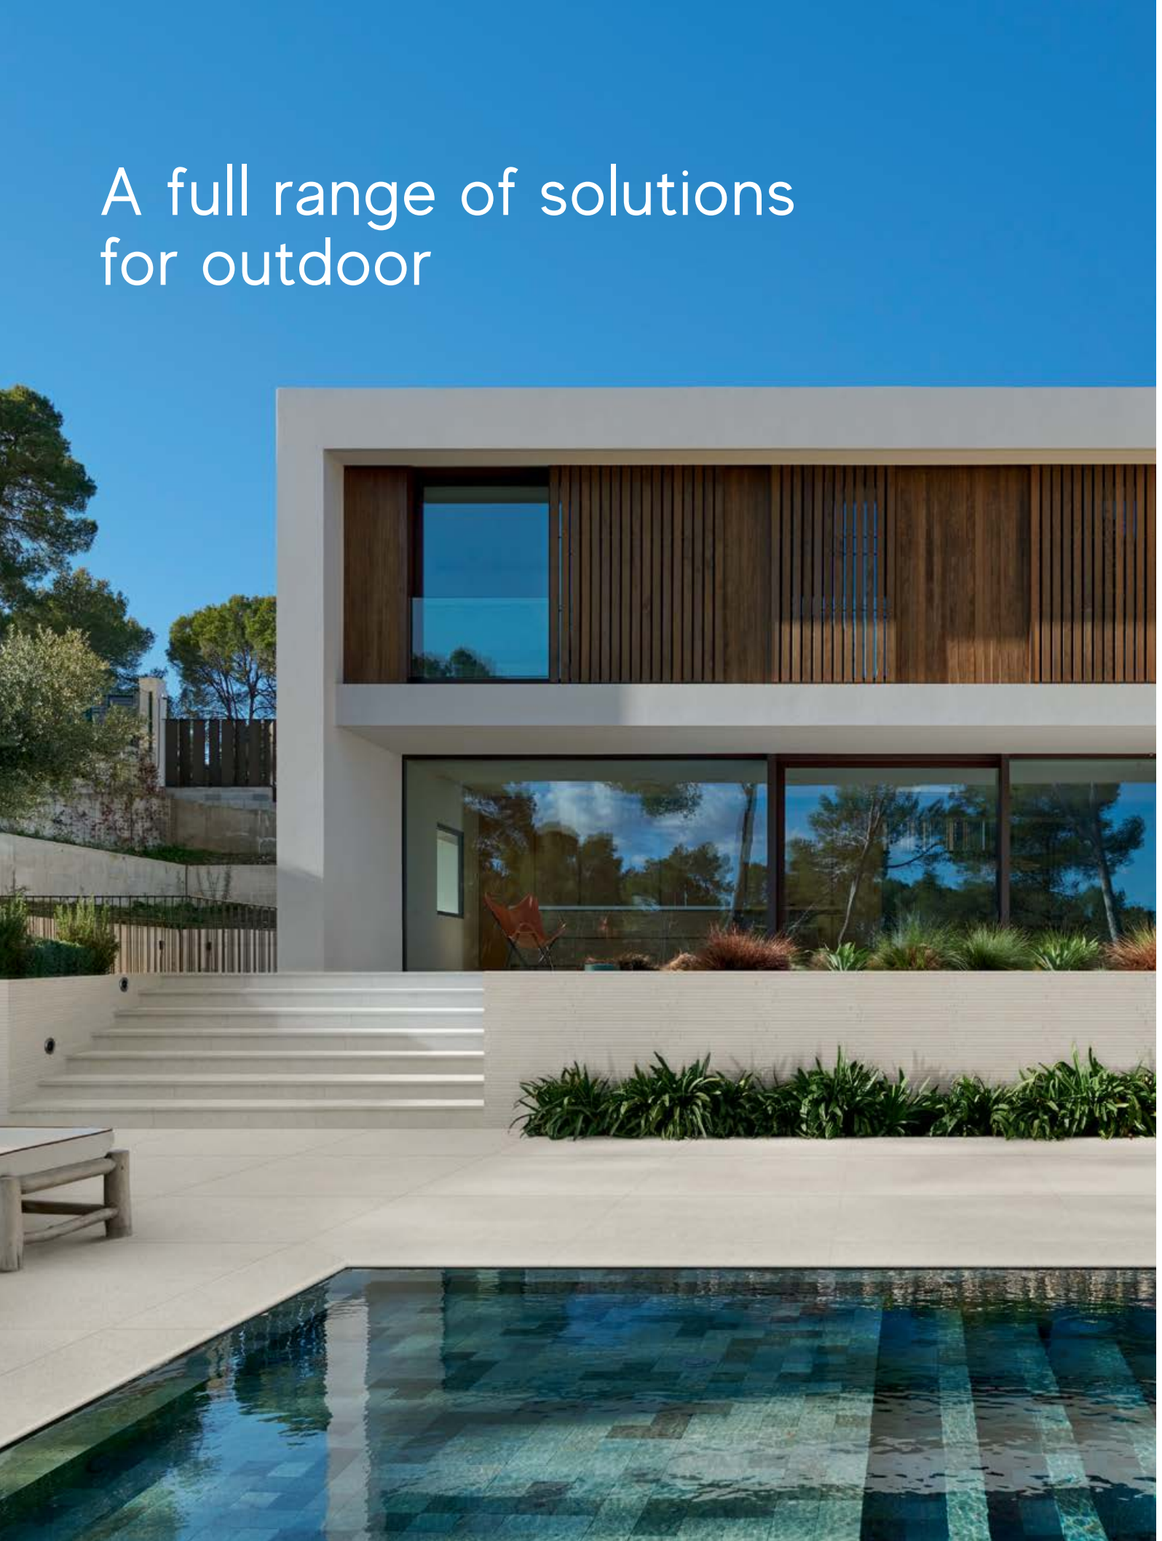

Outdoor Size Index

120x120

128	BOOST ICOR	20 mm	Stone Look
130	BOOST MINERAL	20 mm	Stone Look
132	BOOST MIX	20 mm	Stone Look
134	BOOST STONE	20 mm	Stone Look
142	BOOST	9/20 mm	Concrete Look
142	BOOST PRO	9/20 mm	Concrete Look
144	BOOST BALANCE	9/20 mm	Concrete Look
146	BOOST EXPRESSION	9/20 mm	Concrete Look
148	BOOST NATURAL	9/20 mm	Concrete Look
148	BOOST NATURAL PRO	9/20 mm	Concrete Look
150	PRISM	9/20 mm	Concrete Look

60x120

142	BOOST	20 mm	Concrete Look
144	BOOST BALANCE	20 mm	Concrete Look
146	BOOST EXPRESSION	9/20 mm	Concrete Look
128	BOOST ICOR	9/20 mm	Stone Look
130	BOOST MINERAL	9/20 mm	Stone Look
132	BOOST MIX	20 mm	Stone Look
148	BOOST NATURAL	9 mm	Concrete Look
148	BOOST NATURAL PRO	9/20 mm	Concrete Look
142	BOOST PRO	20 mm	Concrete Look
134	BOOST STONE	9/20 mm	Stone Look
136	BRAVE	20 mm	Stone Look
138	LIMS	20 mm	Stone Look
152	LOG (deck)	20 mm	Wood Look
160	MARVEL MERAVIGLIA	20 mm	Marble Look
162	MARVEL TRAVERTINE	9/20 mm	Marble Look
160	MARVEL X	20 mm	Marble Look
140	NORDE	9/20 mm	Stone Look

80x80

128	BOOST ICOR	20 mm	Stone Look
140	NORDE	20 mm	Stone Look
142	BOOST	20 mm	Concrete Look
142	BOOST PRO	20 mm	Concrete Look
146	BOOST EXPRESSION	20 mm	Concrete Look
150	PRISM	20 mm	Concrete Look

60x90

130	BOOST MINERAL	20 mm	Stone Look
140	NORDE	20 mm	Stone Look

60x60

128	BOOST ICOR	20 mm	Stone Look
130	BOOST MINERAL	9/20 mm	Stone Look
132	BOOST MIX	20 mm	Stone Look
134	BOOST STONE	20 mm	Stone Look
136	BRAVE	20 mm	Stone Look
138	LIMS	20 mm	Stone Look
140	NORDE	20 mm	Stone Look
142	BOOST	20 mm	Concrete Look
142	BOOST PRO	20 mm	Concrete Look
144	BOOST BALANCE	20 mm	Concrete Look
146	BOOST EXPRESSION	20 mm	Concrete Look
148	BOOST NATURAL	20 mm	Concrete Look
148	BOOST NATURAL PRO	20 mm	Concrete Look

30x60

128	BOOST ICOR	9 mm	Stone Look
132	BOOST MIX	9 mm	Stone Look
134	BOOST STONE	9 mm	Stone Look
136	BRAVE	9 mm	Stone Look
140	NORDE	9 mm	Stone Look

18,5x150

158	EXENCE	9 mm	Wood Look

30x120

152	LOG	20 mm	Wood Look
156	ETIC PRO	20 mm	Wood Look
156	ENTICE	20 mm	Wood Look
158	EXENCE	20 mm	Wood Look

20x120

152	LOG	9 mm	Wood Look
154	LOG CANSEI	9 mm	Wood Look
156	ENTICE	9 mm	Wood Look

Outdoor Porcelain Tiles
Stone Look

9 mm Grip, Roccia
20 mm Outdoor

WHITE CROSS CUT
MARVEL TRAVERTINE
GRIP

IVORY
BOOST STONE
GRIP

IVORY
LIMS
GRIP, OUTDOOR

WHITE
BOOST STONE
GRIP, OUTDOOR

BONE
BOOST ICOR
GRIP, OUTDOOR

IVORY
BOOST MIX
GRIP, OUTDOOR

PEARL CROSS CUT
MARVEL TRAVERTINE
GRIP

DUST
BOOST ICOR
GRIP, OUTDOOR

SAND CROSS CUT
MARVEL TRAVERTINE
GRIP

DUNE
BOOST ICOR
GRIP, OUTDOOR

MAGNESIO
NORDE
GRIP, OUTDOOR, ROCCIA

CREAM
BOOST STONE
GRIP, OUTDOOR

ORO
NORDE
GRIP, OUTDOOR, ROCCIA

CLAY
BOOST STONE
GRIP, OUTDOOR

OYSTER
BOOST ICOR
GRIP, OUTDOOR

BEIGE
LIMS
GRIP, OUTDOOR

PLATINO
NORDE
GRIP, OUTDOOR, ROCCIA

WHITE
BOOST MINERAL
GRIP, OUTDOOR

GYPSUM
BRAVE
GRIP, OUTDOOR

SMOKE
BOOST MINERAL
GRIP, OUTDOOR

PIOMBO
NORDE
GRIP, OUTDOOR, ROCCIA

TAUPE
BOOST STONE
GRIP

PEARL
BRAVE
GRIP, OUTDOOR

GREY
BOOST STONE
GRIP, OUTDOOR

GREY
BOOST MINERAL
GRIP, OUTDOOR

SMOKE
BOOST MIX
GRIP, OUTDOOR

GREY ELEGANT
BOOST MINERAL
OUTDOOR

PEARL
BOOST MIX
GRIP, OUTDOOR

PEARL
BOOST STONE
GRIP

GREY
BRAVE
GRIP, OUTDOOR

PEARL
BOOST MINERAL
GRIP

SMOKE
BOOST STONE
GRIP, OUTDOOR

TOBACCO
BOOST STONE
GRIP

EARTH
BRAVE
GRIP, OUTDOOR

TARMAC
BOOST MINERAL
GRIP, OUTDOOR

COKE
BRAVE
GRIP, OUTDOOR

TARMAC
BOOST STONE
GRIP, OUTDOOR

INDEX

SIZE INDEX

SURFACE RANGE
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

IMAGE GALLERY

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

Outdoor Porcelain Tiles
Concrete Look

9 mm Grip
20 mm Outdoor

PURE BOOST BALANCE GRIP	**MOON** BOOST BALANCE GRIP	**WHITE** BOOST BALANCE GRIP, OUTDOOR	**WHITE** BOOST GRIP, OUTDOOR	**KAOLIN** BOOST NATURAL GRIP, OUTDOOR	**GLOW** BOOST EXPRESSION GRIP	**SALT** BOOST NATURAL PRO GRIP	**ICE** BOOST EXPRESSION GRIP, OUTDOOR	**HAZE** BOOST EXPRESSION GRIP, OUTDOOR	**DOVE** BOOST NATURAL PRO GRIP
IVORY BOOST PRO GRIP	**IVORY** BOOST BALANCE GRIP	**CORD** PRISM GRIP, OUTDOOR	**CREAM** BOOST BALANCE GRIP	**CREAM** BOOST PRO GRIP, OUTDOOR	**SHELL** BOOST EXPRESSION GRIP, OUTDOOR	**CAMEL** BOOST EXPRESSION GRIP	**OAT** BOOST NATURAL PRO GRIP, OUTDOOR	**SAND** BOOST NATURAL PRO GRIP	**TAN** BOOST EXPRESSION GRIP
ASH BOOST NATURAL GRIP, OUTDOOR	**ASH** BOOST BALANCE GRIP, OUTDOOR	**PEARL** BOOST GRIP	**CLOUD** PRISM GRIP, OUTDOOR	**GREY** BOOST GRIP, OUTDOOR	**CINDER** BOOST NATURAL PRO GRIP, OUTDOOR	**PEARL** BOOST BALANCE GRIP, OUTDOOR	**GREY** BOOST BALANCE GRIP, OUTDOOR	**SMOKE** BOOST BALANCE GRIP	**FOG** PRISM GRIP, OUTDOOR
CLAY BOOST PRO GRIP, OUTDOOR	**SUEDE** PRISM GRIP, OUTDOOR	**TAUPE** BOOST PRO GRIP, OUTDOOR	**SMOKE** BOOST GRIP, OUTDOOR	**UMBER** BOOST NATURAL GRIP	**ECRU** BOOST NATURAL GRIP, OUTDOOR	**TOBACCO** BOOST PRO GRIP, OUTDOOR	**COAL** BOOST NATURAL GRIP	**TARMAC** BOOST BALANCE GRIP	**TARMAC** BOOST GRIP, OUTDOOR

INDEX

SIZE INDEX

SURFACE RANGE
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

IMAGE GALLERY

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

Outdoor Porcelain Tiles
Wood Look

9 mm Grip
20 mm Outdoor

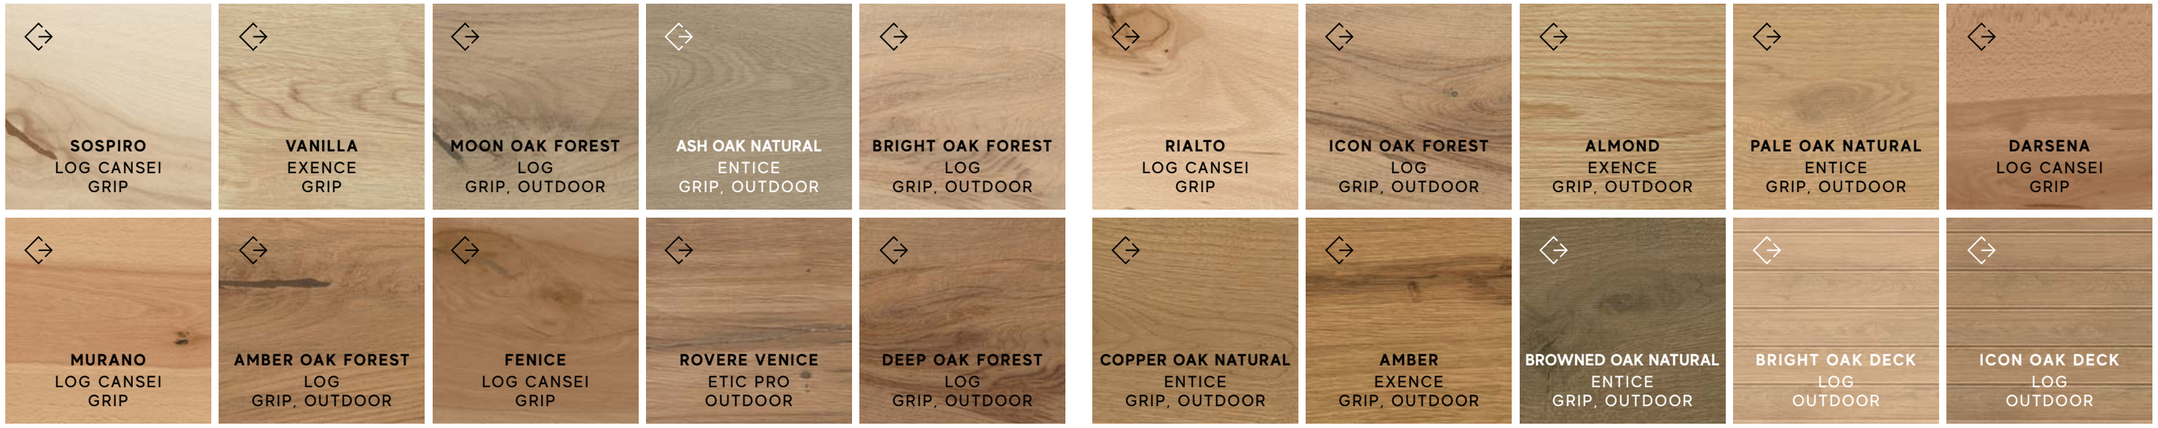

Marble Look

9 mm Grip
20 mm Outdoor, Hammered

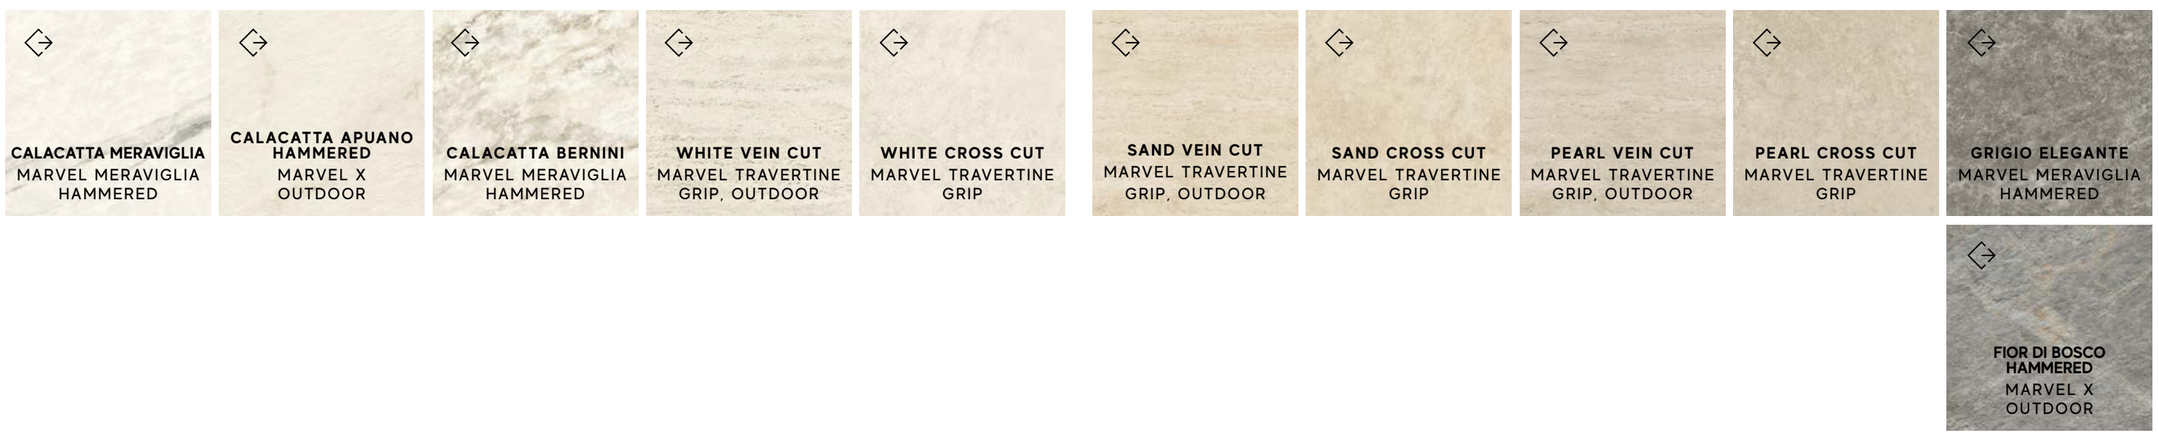

INDEX

SIZE INDEX

SURFACE RANGE
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

IMAGE GALLERY

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

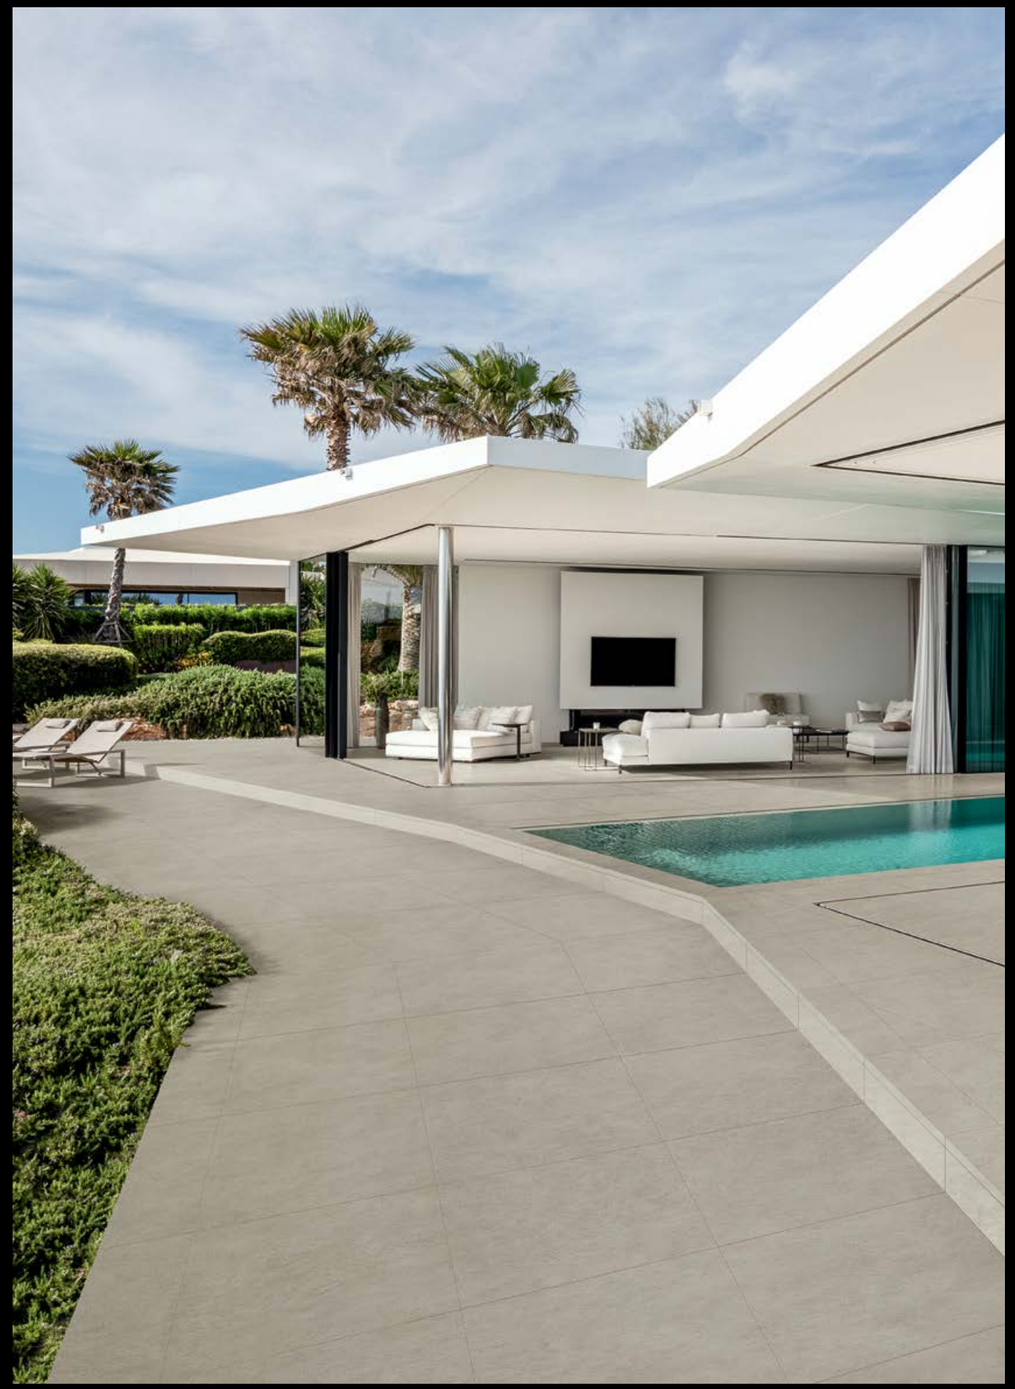

Image Gallery

- STONE LOOK
- CONCRETE LOOK
- WOOD LOOK
- MARBLE LOOK

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

Stone Look

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Boost Icor Oyster
120x120 cm | 47¼"x47¼" ✠ 20 mm
Boost Icor Oyster Elemento L
33x120 cm | 13"x47¼" ✠ 20 mm
Boost Icor Oyster Alzata 20x120 SP
20x120 cm | 7⅞"x47¼" ✠ 20 mm

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

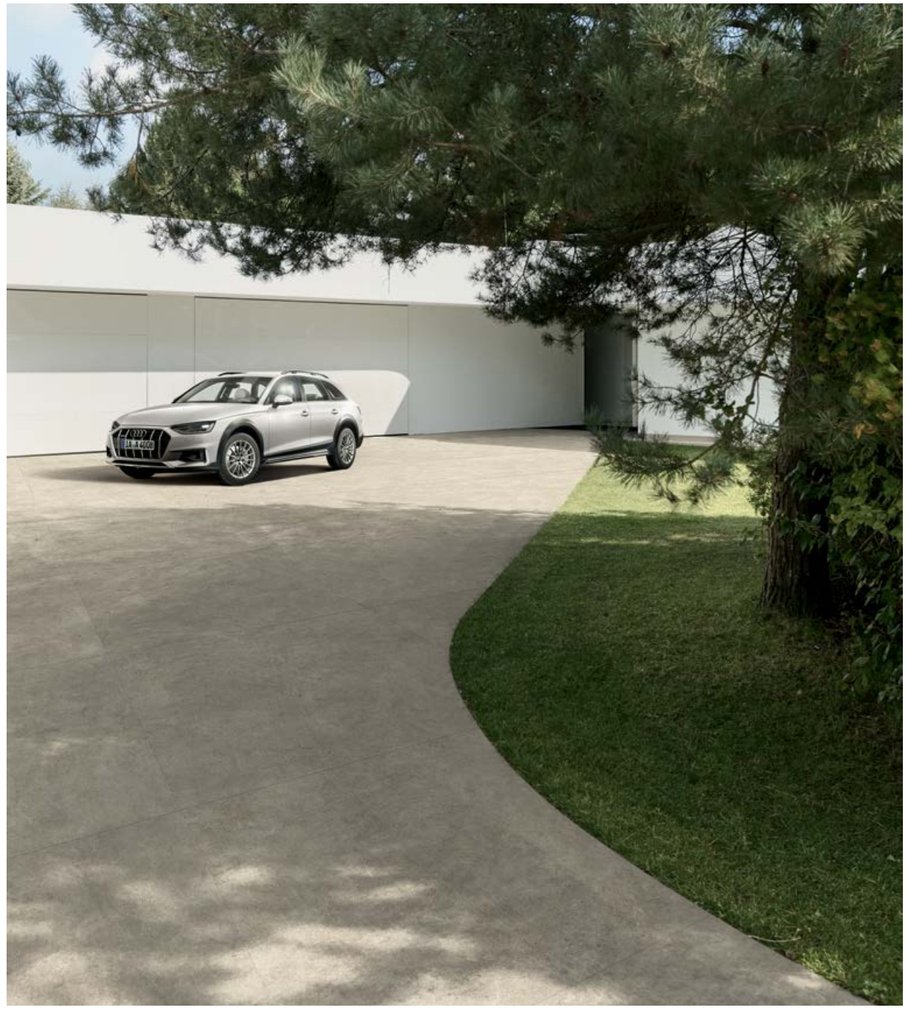

FLOOR
Outdoor Sensitech
Boost Icor Oyster
120x120 cm | 47 1/4"x47 1/4" ✱ 20 mm

FLOOR
Outdoor Sensitech
Boost Icor Oyster Pebble A+B
59,5x59,5 cm | 23 3/8"x23 3/8" ✱ 20 mm

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

WALL
Boost Mineral White Brick
30x60 cm | 11³/₄"x47¹/₄"

FLOOR
Outdoor Sensitech
Boost Mineral White
120x120 cm | 47¹/₄"x47¹/₄" ✱ 20 mm
Boost Mineral White Elemento L
33x120 cm | 13"x47¹/₄" ✱ 20 mm
Boost Mineral White Round
33x120 cm | 13"x47¹/₄" ✱ 20 mm

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

FLOOR (INDOOR)
Matte Sensitech
Boost Mineral White
120x120 cm | 47 1/4"x47 1/4"

FLOOR (OUTDOOR)
Outdoor Sensitech
Boost Mineral White
120x120 cm | 47 1/4"x47 1/4" ✱ 20 mm
Boost Mineral White Round
33x120 cm | 13"x47 1/4" ✱ 20 mm
Boost Mineral White Round Ang. DX/SX
33x120 cm | 13"x47 1/4" ✱ 20 mm
Boost Mineral White Elemento L
33x120 cm | 13"x47 1/4" ✱ 20 mm

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Boost Stone Cream
120x120 cm | 47¼"x47¼" ✱ 20 mm
Boost Stone Cream Round
33x120 cm | 13"x47¼" ✱ 20 mm
Boost Stone Cream Round Ang. DX/SX
33x120 cm | 13"x47¼" ✱ 20 mm
Boost Stone Cream Top
33x120 cm | 13"x47¼" ✱ 20 mm

WALL
Boost Stone Ivory
120x278 cm | 47¼"x109½"

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Boost Stone Cream
120x120 cm | 47¼"x47¼" ⧗ 20 mm
Boost Stone Cream Round
33x120 cm | 13"x47¼" ⧗ 20 mm

WALL
Boost Stone Ivory
120x278 cm | 47¼"x109½"

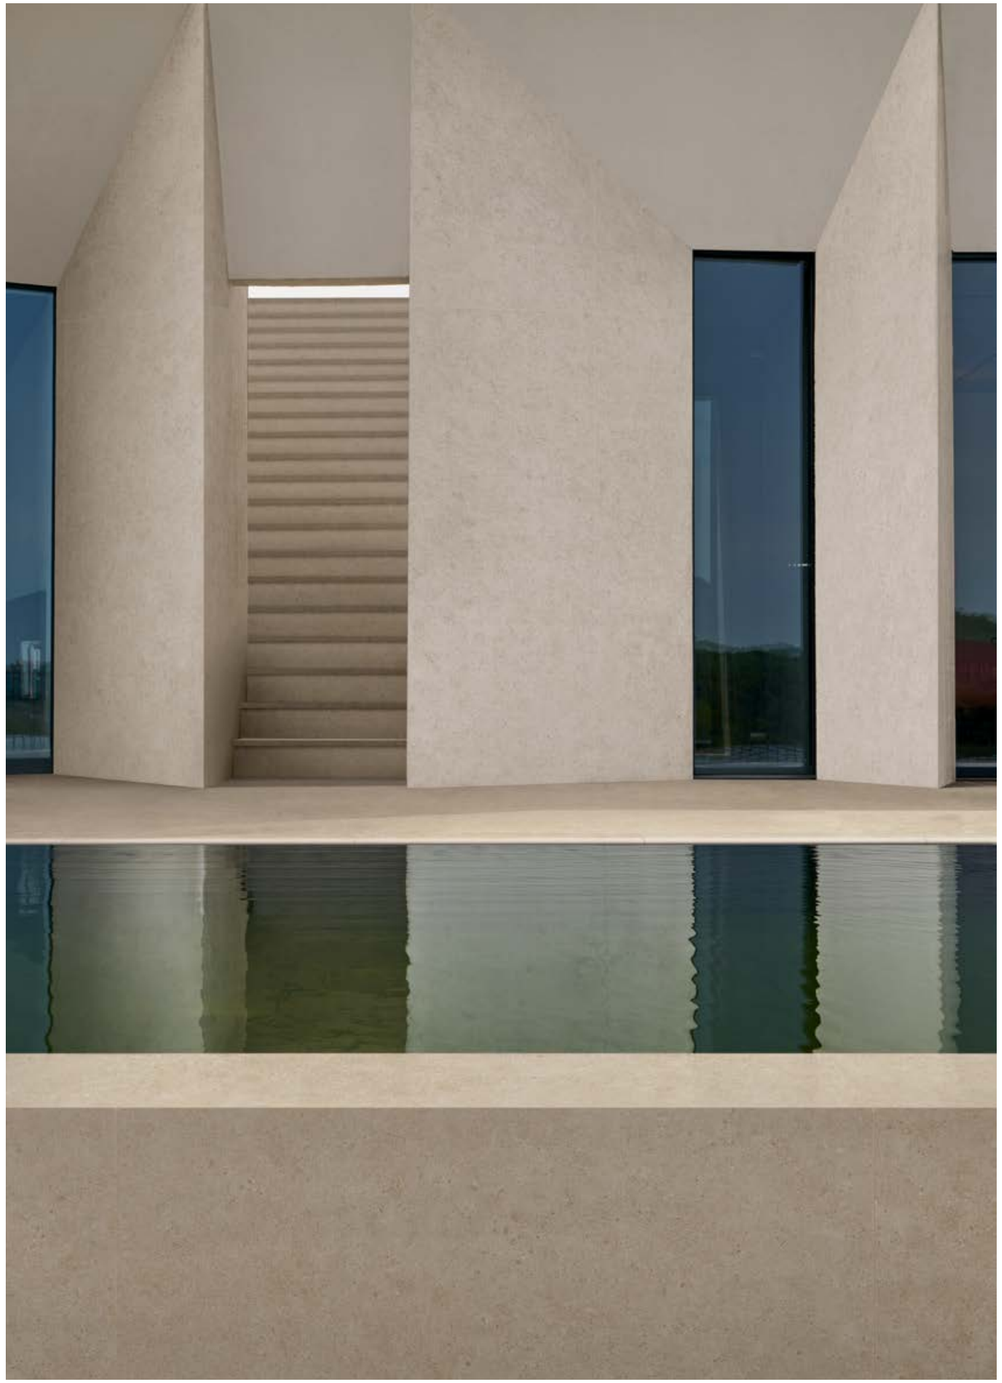

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

FLOOR (INDOOR)
Matte Sensitech
Marvel Travertine Sand Cross Cut
120x120 cm | 47 1/4"x47 1/4"

FLOOR (OUTDOOR)
Outdoor Sensitech
Marvel Travertine Sand Vein Cut
60x120 cm | 23 5/8"x47 1/4" ⧗ 20 mm

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Lims Beige
60x120 cm | 23 5/8"x47 1/4" ✱ 20 mm
Lims Beige Round
33x120 cm | 13"x47 1/4" ✱ 20 mm
Lims Beige Round Ang. DX/SX
33x120 cm | 13"x47 1/4" ✱ 20 mm

FLOOR
Grip Sensitech
Marvel Travertine Sand Cross Cut Grip
60x120 cm | 23 5/8"x47 1/4"

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Norde Oro
60x120 cm | 23 5/8"x47 3/4" ⧗ 20 mm
Norde Oro Round
33x120 cm | 13"x47 1/4" ⧗ 20 mm
Norde Oro Round Ang. Dx/Sx
33x120 cm | 13"x47 1/4" ⧗ 20 mm

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Norde Oro
60x120 cm | 23 5/8"x47 3/4" ✱ 20 mm

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

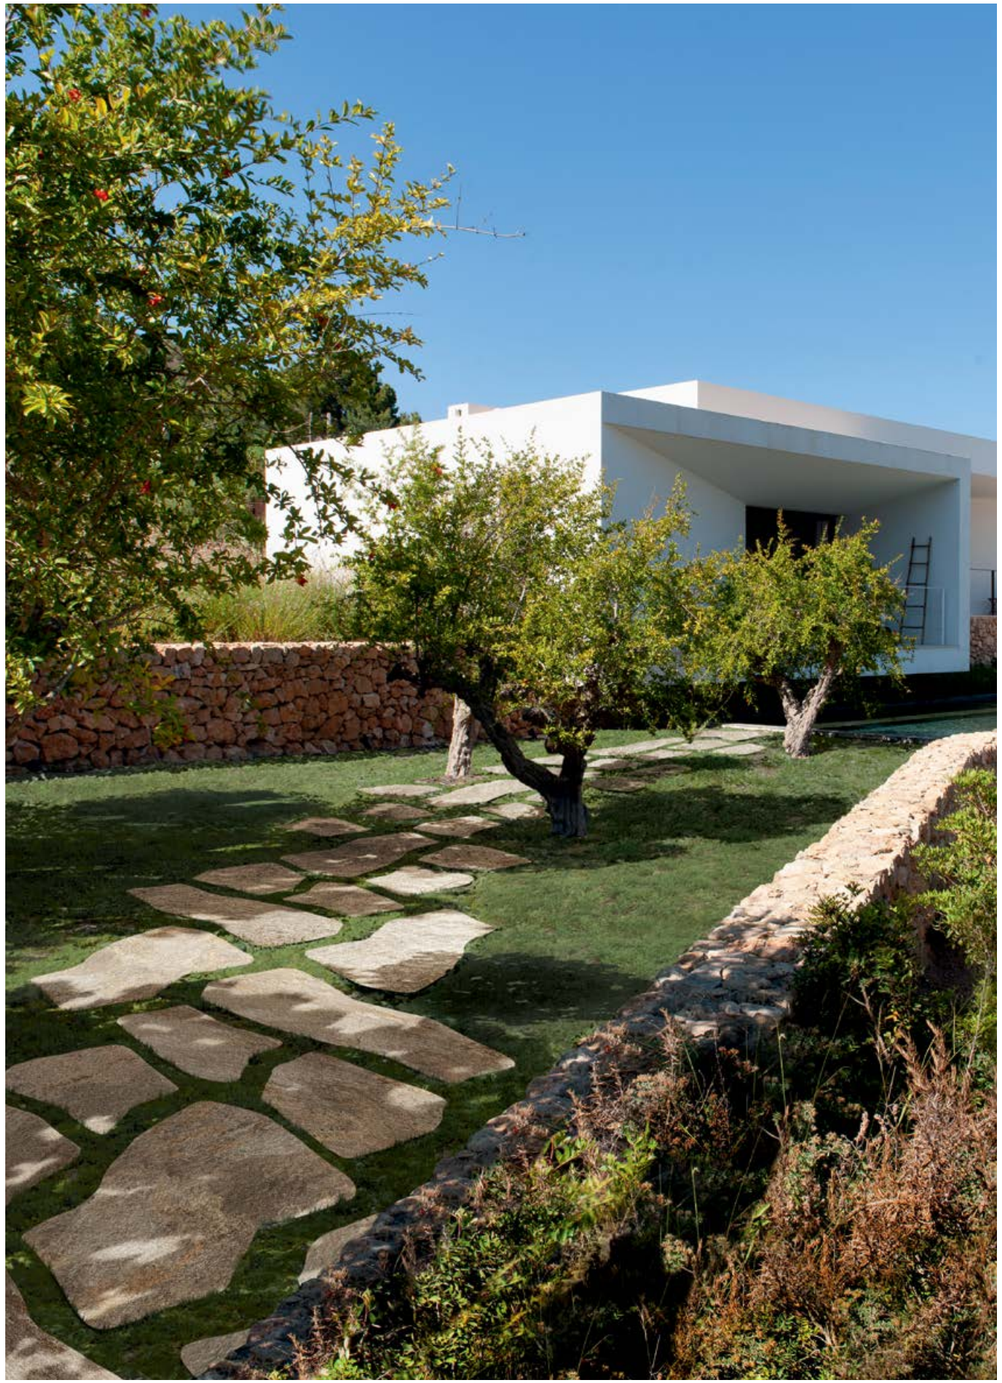

FLOOR
Outdoor Sensitech
Norde Oro Path A+B
54x54 cm | $21^{1}/_{4}$"x$21^{1}/_{4}$" ⧗ 20 mm
Norde Oro Path C
55x109 cm | $21^{5}/_{8}$"x$42^{7}/_{8}$" ⧗ 20 mm

FLOOR
Grip Sensitech
Norde Oro Composizione Palladiana Grip
Kit 8 m^2 | 8 sqm Kit

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Norde Platino
60x120 cm | $23^{5}/_{8}$"x$47^{1}/_{4}$" ✠ 20 mm
Norde Piombo
60x120 cm | $23^{5}/_{8}$"x$47^{1}/_{4}$" ✠ 20 mm
Norde Piombo Elemento L
33x120 cm | 13"x$47^{1}/_{4}$" ✠ 20 mm
Norde Piombo Elemento L Ang.
33x33 cm | 13"x13" ✠ 20 mm

WALL
Norde Platino
60x120 cm | $23^{5}/_{8}$"x$47^{1}/_{4}$"
Norde Piombo Roccia
30x60 cm | $11^{3}/_{4}$"x$23^{5}/_{8}$"

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Boost Mix Pearl
120x120 cm | 47 1/4" x 47 1/4" ✱ 20 mm
Boost Mix Pearl Elemento L
33x120 cm | 13" x 47 1/4" ✱ 20 mm
Boost Mix Pearl Round
33x120 cm | 13" x 47 1/4" ✱ 20 mm
Boost Mix Pearl Round Ang. DX/SX
33x120 cm | 13" x 47 1/4" ✱ 20 mm

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Boost Mineral Grey
120x120 cm | 47 1/4"x47 1/4" ⧗ 20 mm

FLOOR
Grip Sensitech
Boost Mineral White Grip
60x120 cm | 23 5/8"x47 1/4"

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Boost Mineral Tarmac
120x120 cm | 47 1/4"x47 1/4" ✱ 20 mm

WALL
Boost Mineral Tarmac Elegant
120x278 cm | 47 1/4"x109 1/2"

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Boost Stone Grey
120x120 cm | 47 1/4"x47 1/4" ✱ 20 mm

WALL
Boost Stone Grey
120x120 cm | 47 1/4"x47 1/4"
Boost Stone Grey Mosaico Brick
30x60 cm | 11 3/4"x23 5/8"

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

Concrete Look

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Boost Expression Haze
120x120 cm | 47 1/4"x47 1/4" ✠ 20 mm

WALL
Boost Expression Haze
120x278 cm | 47 1/4"x109 1/2"

OUTDOOR COUNTER
Boost Expression Haze
120x278 cm | 47 1/4"x109 1/2"

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

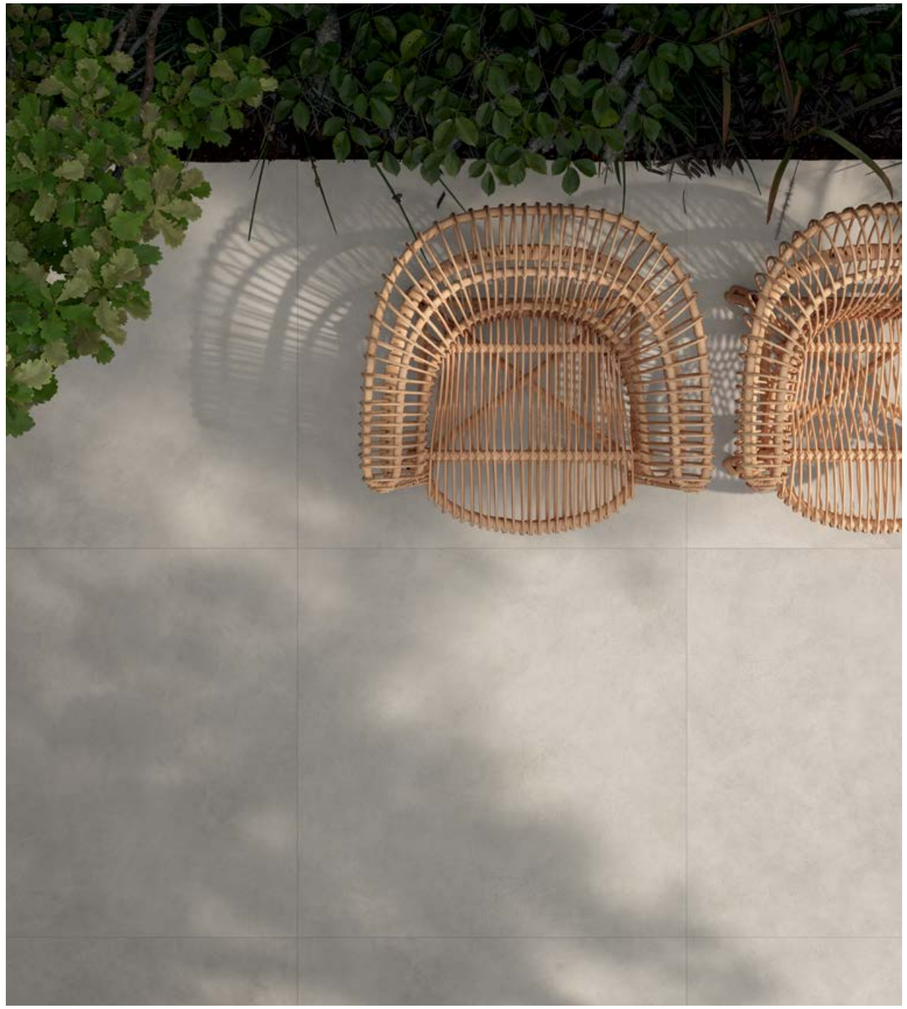

FLOOR
Outdoor Sensitech
Boost Expression Haze
120x120 cm | 47¼"x47¼" ✱ 20 mm

WALL
Boost Expression Haze
120x278 cm | 47¼"x109½"

OUTDOOR COUNTER
Boost Expression Haze
120x278 cm | 47¼"x109½"

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

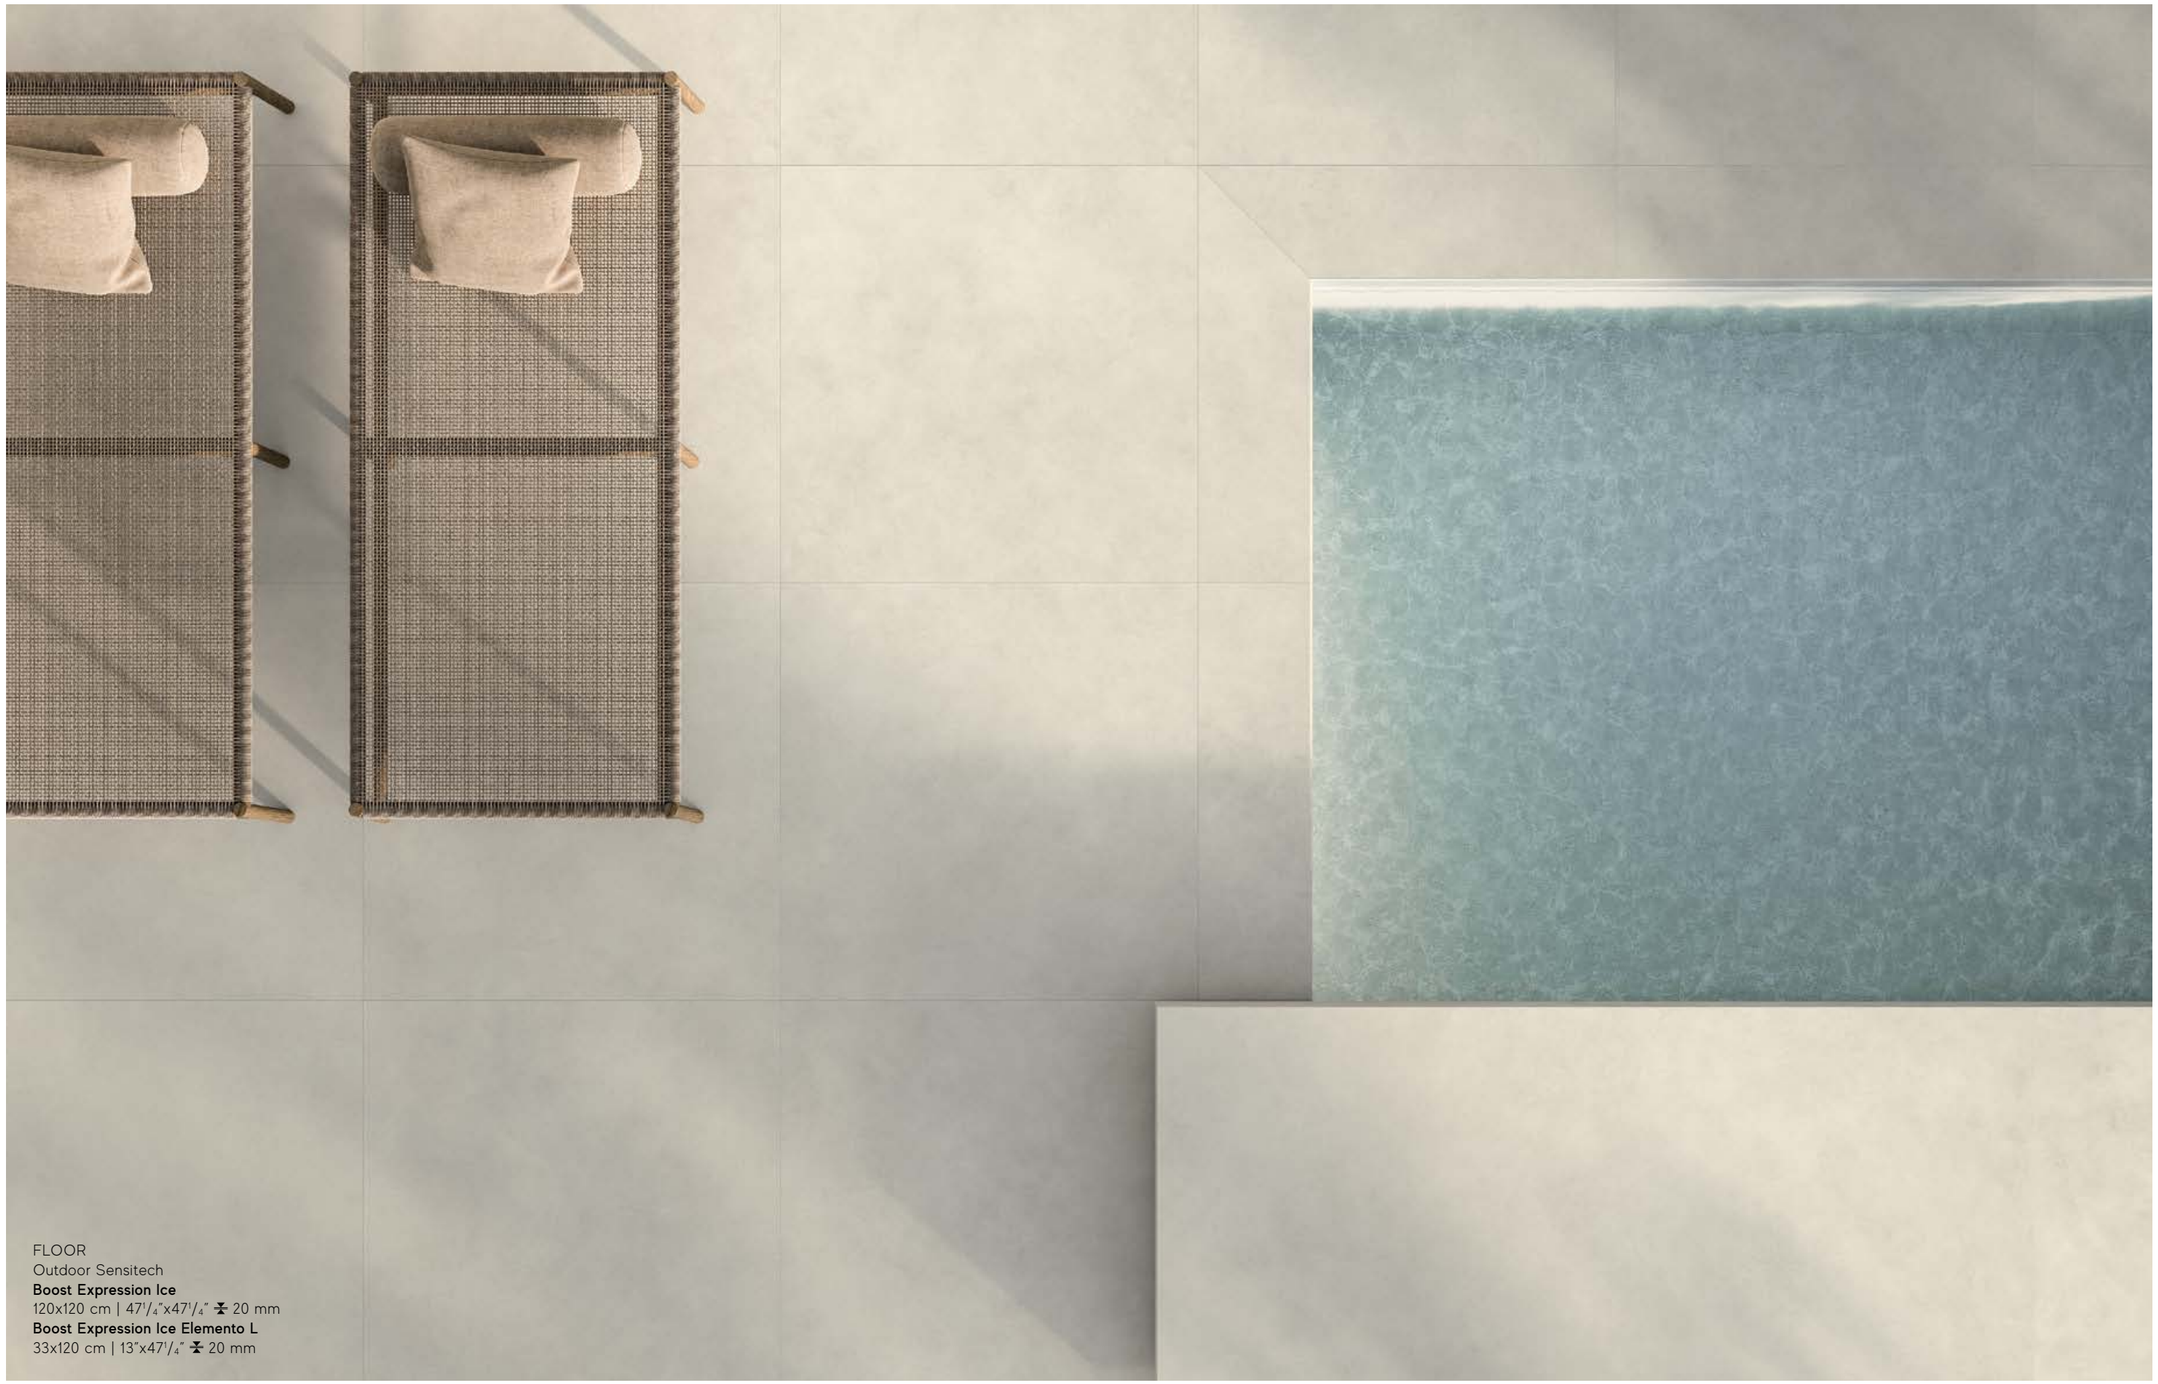

FLOOR
Outdoor Sensitech
Boost Expression Ice
120x120 cm | 47¼"x47¼" ⧗ 20 mm
Boost Expression Ice Elemento L
33x120 cm | 13"x47¼" ⧗ 20 mm

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Boost Expression Ice
120x120 cm | 47¼"x47¼" ✱ 20 mm
Boost Expression Ice Elemento L
33x120 cm | 13"x47¼" ✱ 20 mm

WALL
Boost Expression Ice
120x278 cm | 47¼"x109½"
Boost Expression Haze
120x278 cm | 47¼"x109½"

Image Gallery
INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Boost Expression Shell
120x120 cm | 47 1/4"x47 1/4" ✠ 20 mm
Boost Expression Shell Elemento L
33x120 cm | 13"x47 1/4" ✠ 20 mm

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Boost Balance Pearl
120x120 cm | 47 1/4"x47 1/4" ⧗ 20 mm
Boost Balance Pearl Round
33x120 cm | 13"x47 1/4" ⧗ 20 mm
Boost Balance Pearl Elemento L
33x120 cm | 13"x47 1/4" ⧗ 20 mm

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Boost Balance Pearl
120x120 cm | 47¹/₄"x47¹/₄" ✠ 20 mm
Boost Balance Pearl Round
33x120 cm | 13"x47¹/₄" ✠ 20 mm
Boost Balance Pearl Elemento L
33x120 cm | 13"x47¹/₄" ✠ 20 mm

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Boost Balance Pearl
120x120 cm | 47¼"x47¼" ✱20 mm

WALL
Boost Balance Pearl
120x278 cm | 47¼"x109½"

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

FLOOR (OUTDOOR)
Outdoor Sensitech
Boost Natural Pro Cinder
120x120 cm | 47 1/4" x 47 1/4" | 20 mm
Boost Natural Pro Cinder Elemento L
33x120 cm | 13" x 47 1/4" | 20 mm
Boost Natural Pro Cinder Alzata
20x120 cm | 7 7/8" x 47 1/4" | 20 mm

FLOOR (INDOOR)
Matte Sensitech
Boost Natural Pro Cinder
120x120 cm | 47 1/4" x 47 1/4"

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

FLOOR (OUTDOOR)
Outdoor Sensitech
Boost Natural Pro Cinder
120x120 cm | 47¼"x47¼" ✱ 20 mm
Boost Natural Pro Cinder Round
33x120 cm | 13"x47¼" ✱ 20 mm

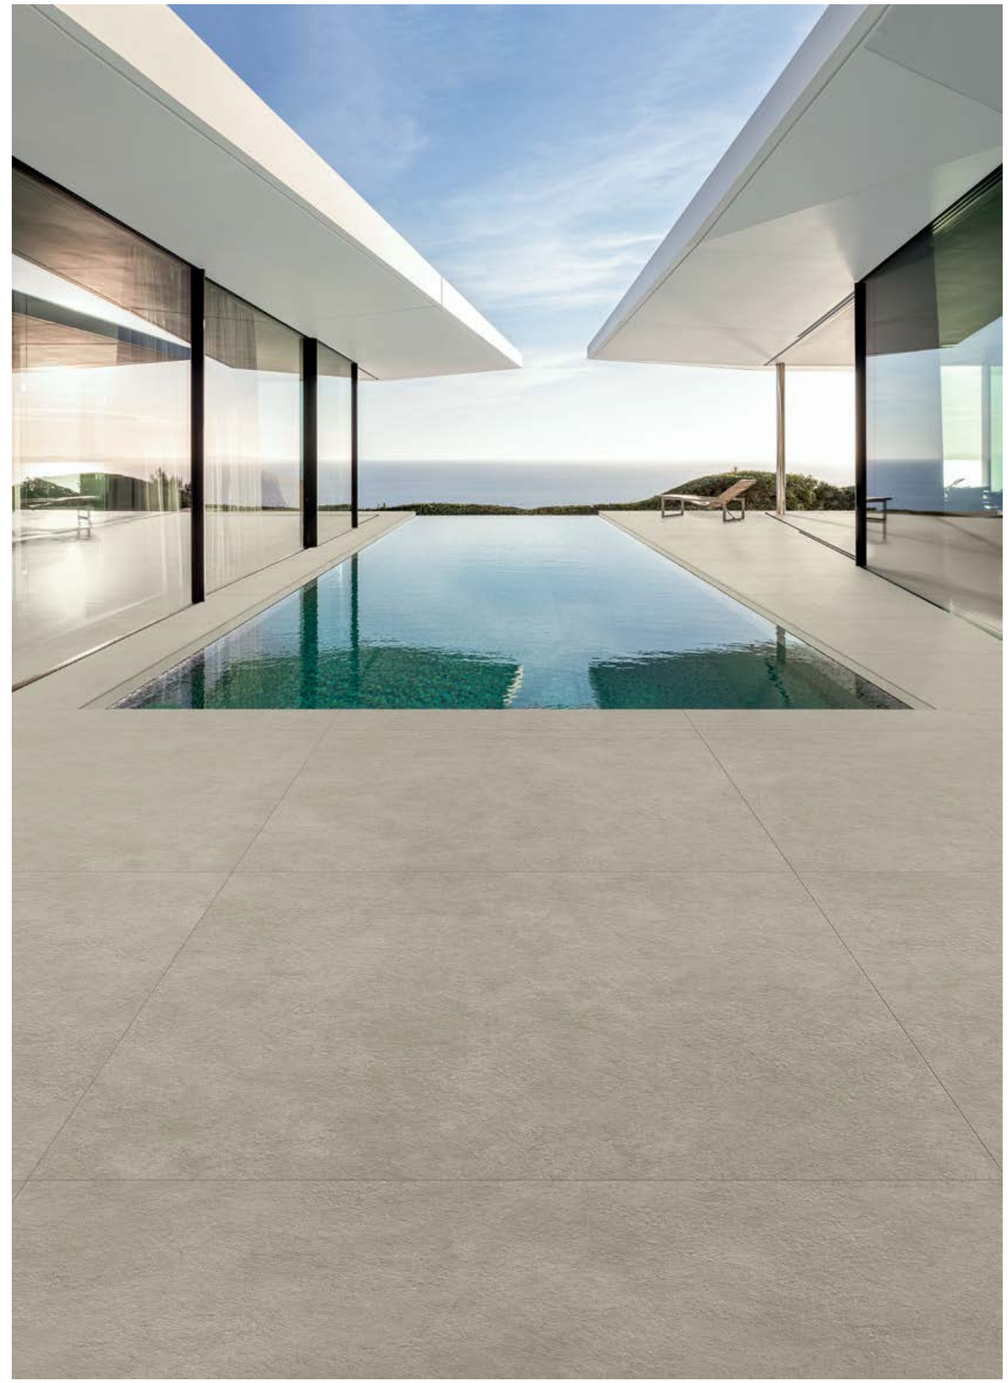

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Boost White
120x120 cm | 47¼"x47¼" ✱ 20 mm
Boost White Round
33x120 cm | 13"x47¼" ✱ 20 mm
Boost White Round Ang. Dx/Sx
33x120 cm | 13"x47¼" ✱ 20 mm
Grip Sensitech
Boost White Grip
120x120 cm | 47¼"x47¼"

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Boost White
120x120 cm | 47¼"x47¼" ⧗ 20 mm
Boost White Round
33x120 cm | 13"x47¼" ⧗ 20 mm
Boost White Round Ang. Dx/Sx
33x120 cm | 13"x47¼" ⧗ 20 mm
Grip Sensitech
Boost White Grip
120x120 cm | 47¼"x47¼"

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Boost White
120x120 cm | 47¼"x47¼" ✠ 20 mm

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Boost Pro Clay
120x120 cm | 47¼"x47¼" ✱ 20 mm
Boost Pro Clay Elemento L
33x120 cm | 13"x47¼" ✱ 20 mm
Boost Pro Clay Round
33x120 cm | 13"x47¼" ✱ 20 mm
Boost Pro Clay Round Round Ang. DX/SX
33x120 cm | 13"x47¼" ✱ 20 mm

FLOOR
Outdoor Sensitech
Boost Natural Ecru
120x120 cm | 47 1/4"x47 1/4" ⧗20 mm
Boost Natural Ecru Elemento L
33x120 cm | 13"x47 1/4" ⧗20 mm
Boost Natural Ecru Alzata
20x120 cm | 7 7/8"x47 1/4" ⧗ 20 mm

WALL
Boost Natural Umber
120x278 cm | 47 1/4"x109 1/2"

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Boost Natural Ecru
120x120 cm | 47 1/4"x47 1/4" ✱ 20 mm
Boost Natural Ecru Elemento L
33x120 cm | 13"x47 1/4" ✱ 20 mm
Boost Natural Ecru Alzata
20x120 cm | 7 7/8"x47 1/4" ✱ 20 mm

WALL
Boost Natural Umber
120x278 cm | 47 1/4"x109 1/2"

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

^
FLOOR
Outdoor Sensitech
Boost Balance Pearl
120x120 cm | 47¼"x47¼" ✱20 mm
Boost Balance Pearl Elemento L
33x120 cm | 13"x47¼" ✱20 mm

>
FLOOR
Outdoor Sensitech
Boost Balance Ash
120x120 cm | 47¼"x47¼" ✱20 mm

Image Gallery
INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

Wood Look

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Log Icon Oak Deck
60x120 cm | 23 5/8"x47 1/4" ⧗ 20 mm
Log Icon Oak Forest
30x120 cm | 11 3/4"x47 1/4" ⧗ 20 mm

WALL
Boost Balance White
120x278 cm | 47 1/4"x109 1/2"

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Log Icon Oak Deck
60x120 cm | $23^{5}/_{8}$"x$47^{1}/_{4}$" ✠ 20 mm
Log Icon Oak Forest
30x120 cm | $11^{3}/_{4}$"x$47^{1}/_{4}$" ✠ 20 mm

WALL
Boost Balance White
120x278 cm | $47^{1}/_{4}$"x$109^{1}/_{2}$"

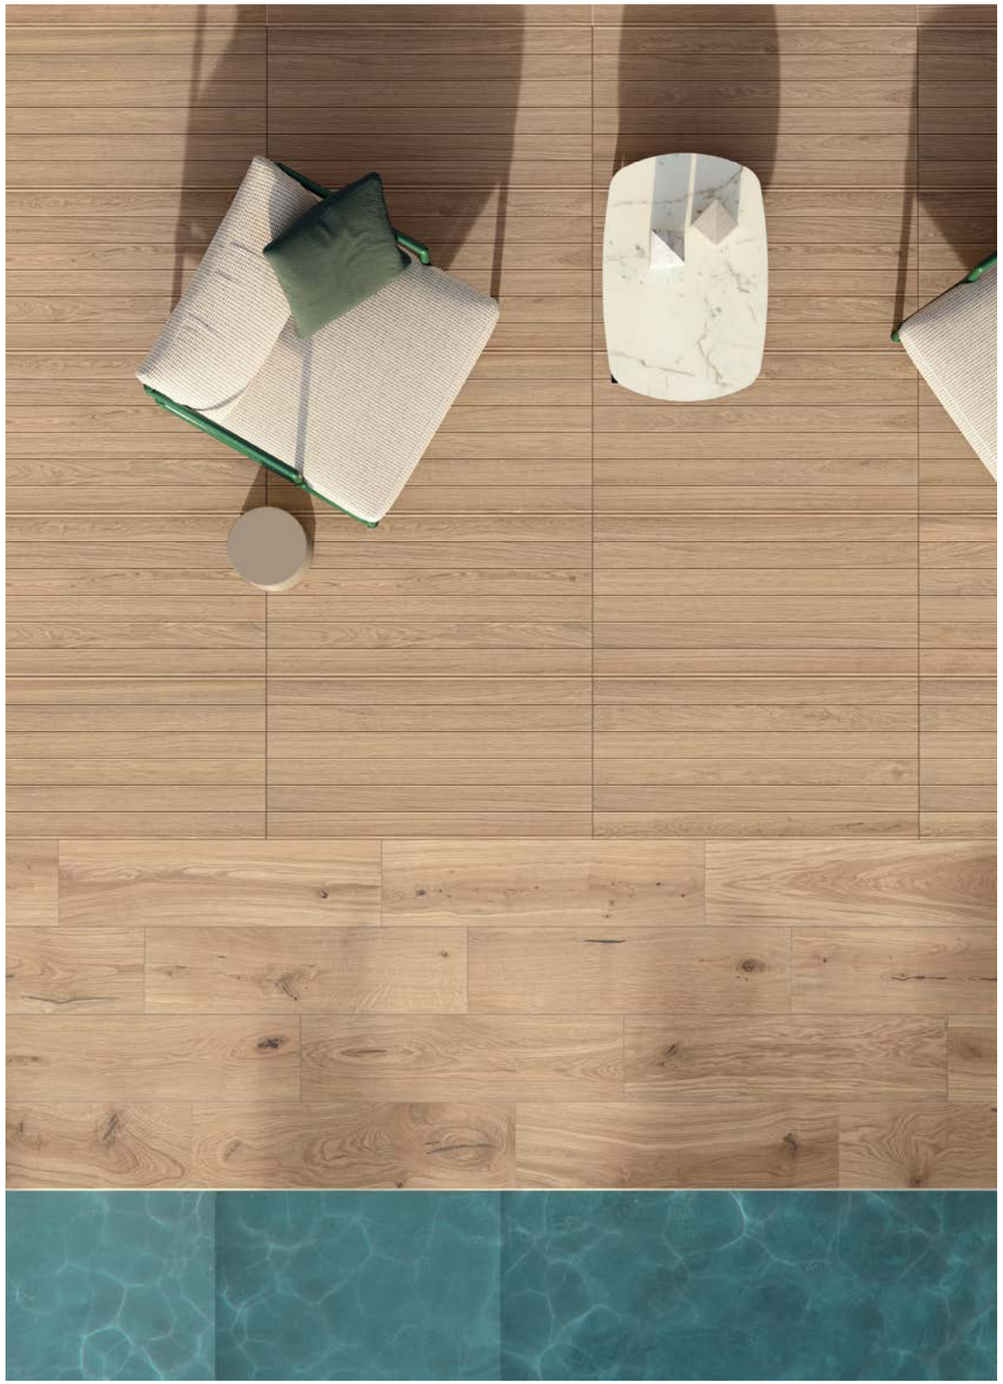

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

FLOOR (OUTDOOR)
Outdoor Sensitech
Log Bright Oak Forest
30x120 cm | $11^{3}/_{4}$"x$47^{1}/_{4}$" ⧗ 20 mm
Log Bright Oak Forest Elemento L
30x120 cm | $11^{3}/_{4}$"x$47^{1}/_{4}$" ⧗ 20 mm

FLOOR (INDOOR)
Matte Sensitech
Log Bright Oak
20x120 cm | $7^{7}/_{8}$"x$47^{1}/_{4}$"

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

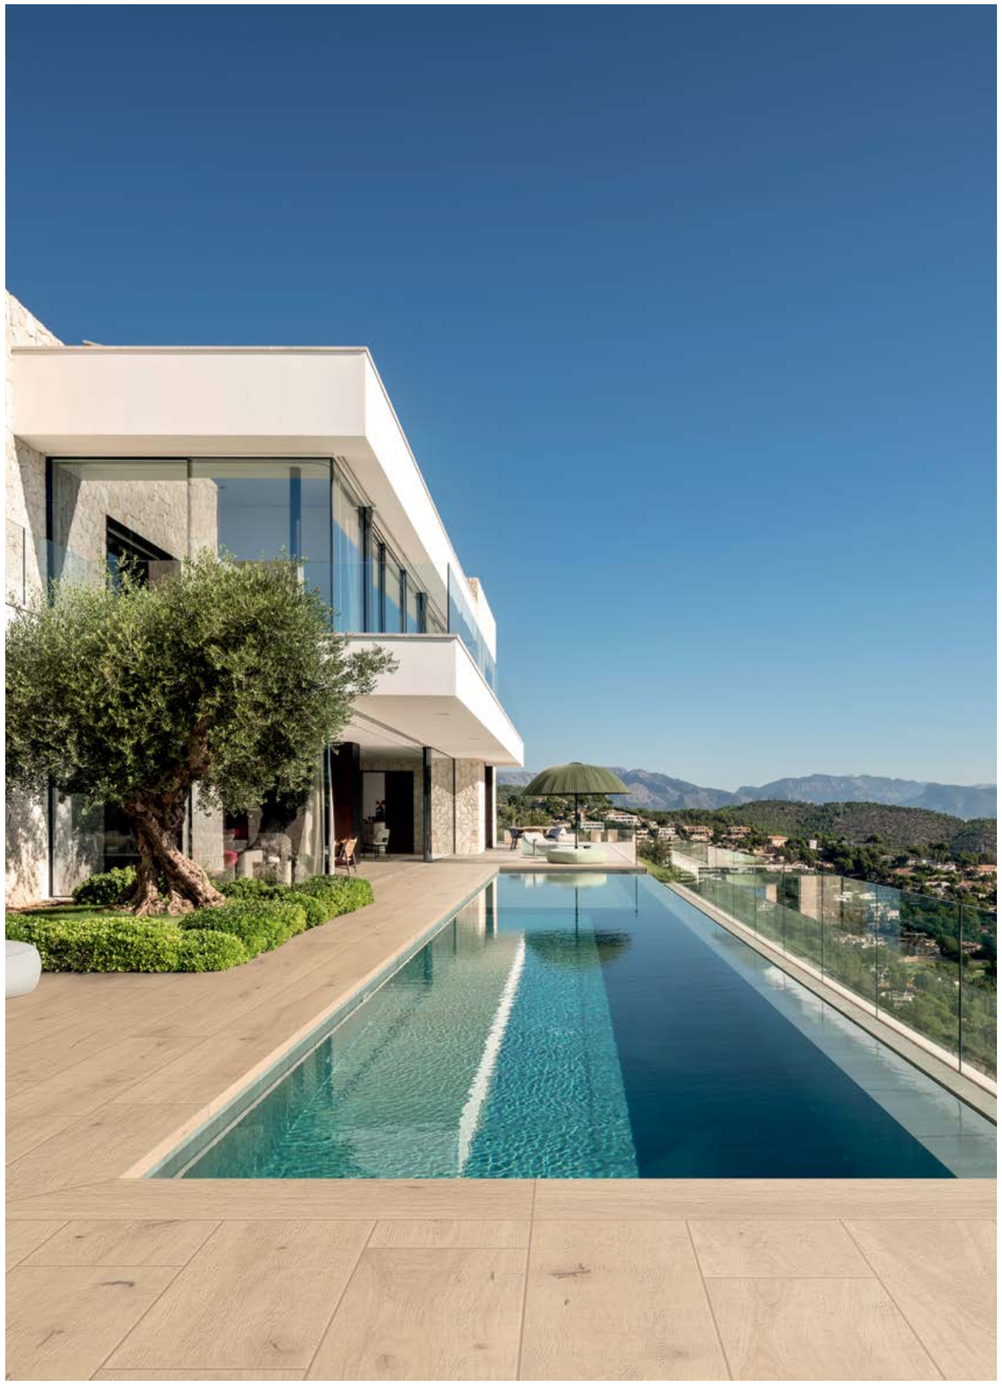

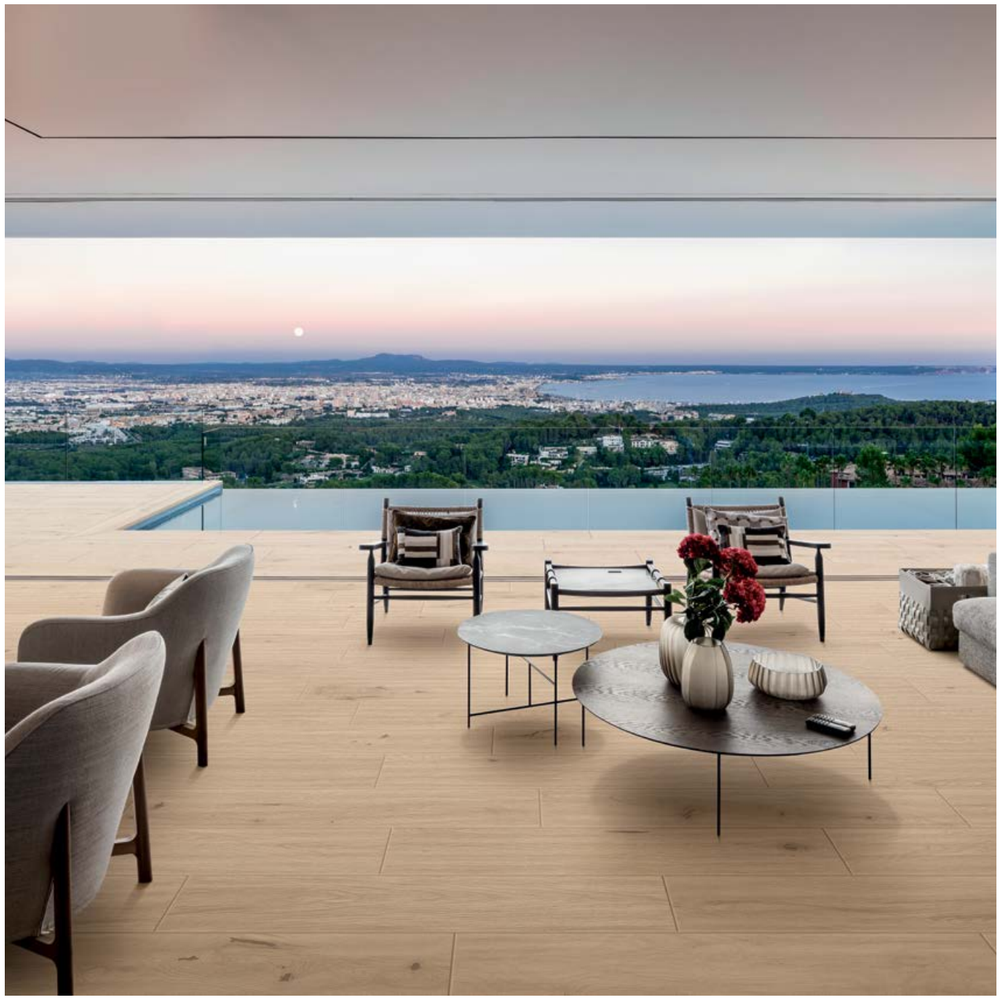

FLOOR (OUTDOOR)
Outdoor Sensitech
Log Bright Oak Forest
30x120 cm | $11^{3}/_{4}$"x$47^{1}/_{4}$" ✱ 20 mm
Log Bright Oak Forest Elemento L
30x120 cm | $11^{3}/_{4}$"x$47^{1}/_{4}$" ✱ 20 mm

FLOOR (INDOOR)
Matte Sensitech
Log Bright Oak
20x120 cm | $7^{7}/_{8}$"x$47^{1}/_{4}$"

FLOOR (OUTDOOR)
Outdoor Sensitech
Log Bright Oak Forest
30x120 cm | $11^{3}/_{4}$"x$47^{1}/_{4}$" ✱ 20 mm
Log Bright Oak Forest Elemento L
30x120 cm | $11^{3}/_{4}$"x$47^{1}/_{4}$" ✱ 20 mm

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

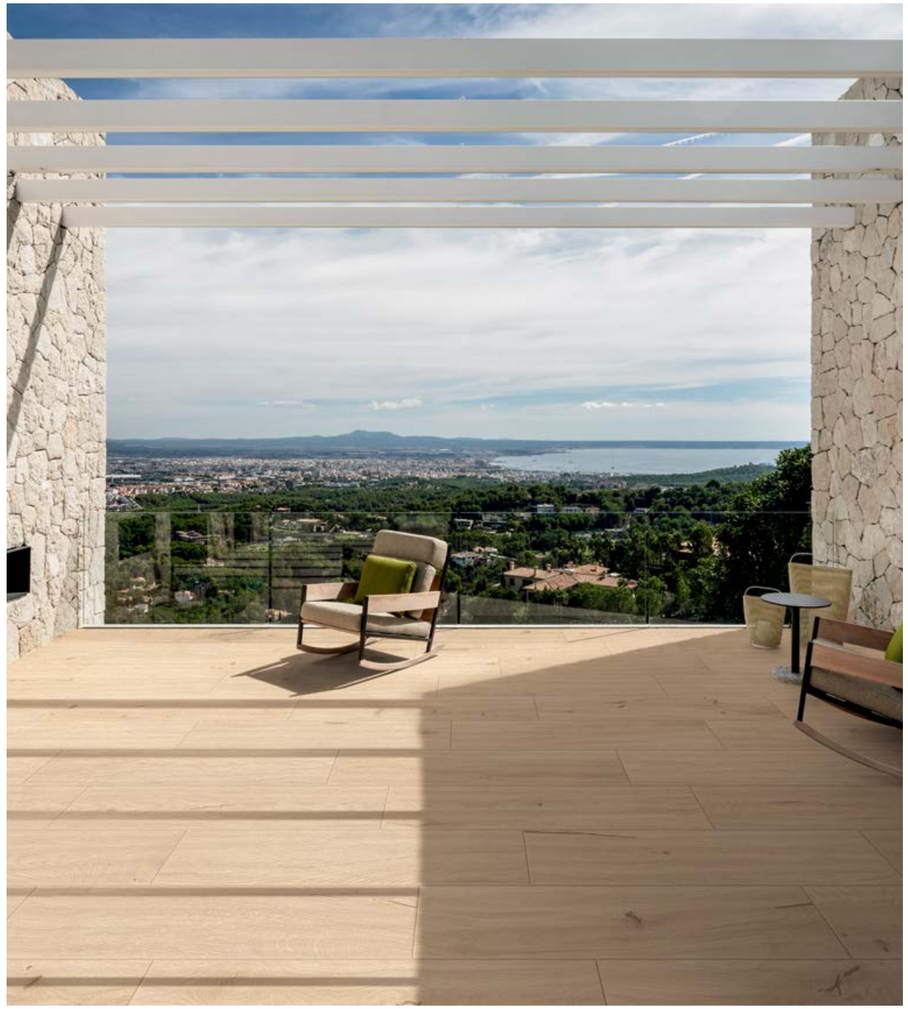

FLOOR
Outdoor Sensitech
Log Bright Oak Forest
30x120 cm | 11^{3}/$_{4}$"x47^{1}/$_{4}$" ✱ 20 mm

FLOOR
Outdoor Sensitech
Log Bright Oak Deck
60x120 cm | 23^{5}/$_{8}$"x47^{1}/$_{4}$" ✱ 20 mm

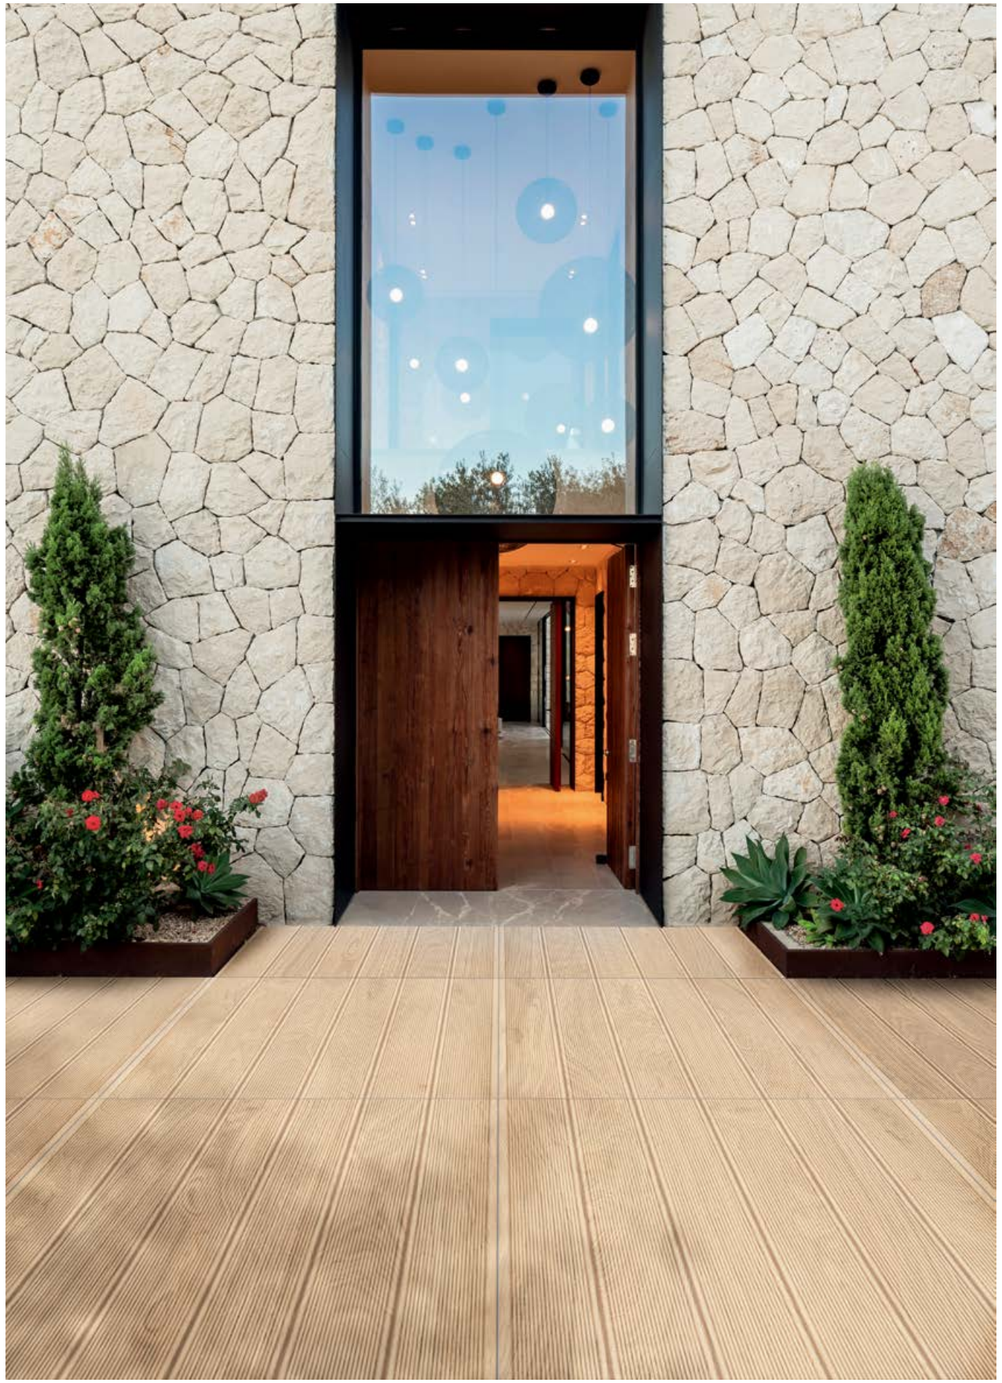

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

FLOOR (OUTDOOR)
Outdoor Sensitech
Log Bright Oak Forest
30x120 cm | 11 3/4"x47 1/4" ⧗ 20 mm

FLOOR (INDOOR)
Grip Sensitech
Log Bright Oak Forest Grip
20x120 cm | 7 7/8"x47 1/4"
Log Bright Oak Forest Elemento L Grip
20x120 cm | 7 7/8"x47 1/4"

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

FLOOR
Grip Sensitech
Log Cansei Murano Grip
20x120 cm | 7 7/8"x47 1/4"

WALL
Matte Sensitech
Log Cansei Murano Riga
18,5x150 cm | 7 1/4"x59"

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Entice Browned Oak Natural
30x120 cm | 11³/₄"x47¼" ✱ 20 mm
Entice Browned Oak Natural Elemento L
30x120 cm | 11³/₄"x47¼" ✱ 20 mm
Entice Browned Oak Natural Round
30x120 cm | 11³/₄"x47¼" ✱ 20 mm

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Entice Browned Oak Natural
30x120 cm | 11 3/4"x47 1/4" ⧗ 20 mm
Entice Browned Oak Natural Elemento L
30x120 cm | 11 3/4"x47 1/4" ⧗ 20 mm
Entice Browned Oak Natural Round
30x120 cm | 11 3/4"x47 1/4" ⧗ 20 mm

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

FLOOR
Grip Sensitech
Entice Copper Oak Natural Grip
20x120 cm | $7^{7}/_{8}$"x$47^{1}/_{4}$"
Entice Copper Oak Natural Elemento L Grip
20x120 H.4 cm | $7^{7}/_{8}$"x$47^{1}/_{4}$"x$1^{5}/_{8}$"

FLOOR (INDOOR)
Matte Sensitech
Entice Browned Oak Natural
20x120 cm | $7^{1}/_{4}$"x$47^{1}/_{4}$"

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

^

FLOOR
Outdoor Sensitech
Exence Almond
30x120 cm | 11³/₄"x47¹/₄" ✱ 20 mm
Exence Almond Round
30x120 cm | 11³/₄"x47¹/₄" ✱ 20 mm
Exence Almond Round Ang. Dx/Sx
30x120 cm | 11³/₄"x47¹/₄" ✱ 20 mm
Exence Almond Alzata
30x120 cm | 11³/₄"x47¹/₄" ✱ 20 mm
Boost Grey
120x120 cm | 47¹/₄"x47¹/₄" ✱ 20 mm

>

FLOOR
Outdoor Sensitech
Etic Pro Rovere Venice
30x120 cm | 11³/₄"x47¹/₄" ✱ 20 mm

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

Marble Look

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Marvel Meraviglia Calacatta Bernini Hammered
60x120 cm | 23⅝"x47¼" ✱ 20 mm
Marvel Meraviglia Calacatta Bernini Hammered Round
33x120 cm | 13"x47¼" ✱ 20 mm
Marvel Meraviglia Calacatta Bernini Hammered Elemento L
33x120 cm | 13"x47¼" ✱ 20 mm

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

FLOOR (INDOOR)
Marvel Meraviglia Calacatta Bernini Polished
120x240 cm | 47 1/4"x94 1/2"

FLOOR (OUTDOOR)
Outdoor Sensitech
Marvel Meraviglia Calacatta Bernini Hammered
60x120 cm | 23 5/8"x47 1/4" ✱ 20 mm

WALL
Marvel Meraviglia Black Origin
120x278 cm | 47 1/4"x109 1/2"

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Marvel Meraviglia Calacatta Meraviglia Hammered
60x120 cm | 23$^{5}/_{8}$"x47$^{1}/_{4}$" ✠ 20 mm

FLOOR
Outdoor Sensitech
Marvel X Calacatta Apuano Hammered
60x120 cm | 23$^{5}/_{8}$"x47$^{1}/_{4}$" ✠ 20 mm

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Marvel X Fior di Bosco Hammered
60x120 cm | 23 5/8"x47 1/4" ⧗ 20 mm
Marvel X Calacatta Apuano Hammered
60x120 cm | 23 5/8"x47 1/4" ⧗ 20 mm

WALL
Marvel X Fior di Bosco Hammered
60x120 cm | 23 5/8"x47 1/4"
Marvel X Calacatta Apuano Hammered
60x120 cm | 23 5/8"x47 1/4"

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

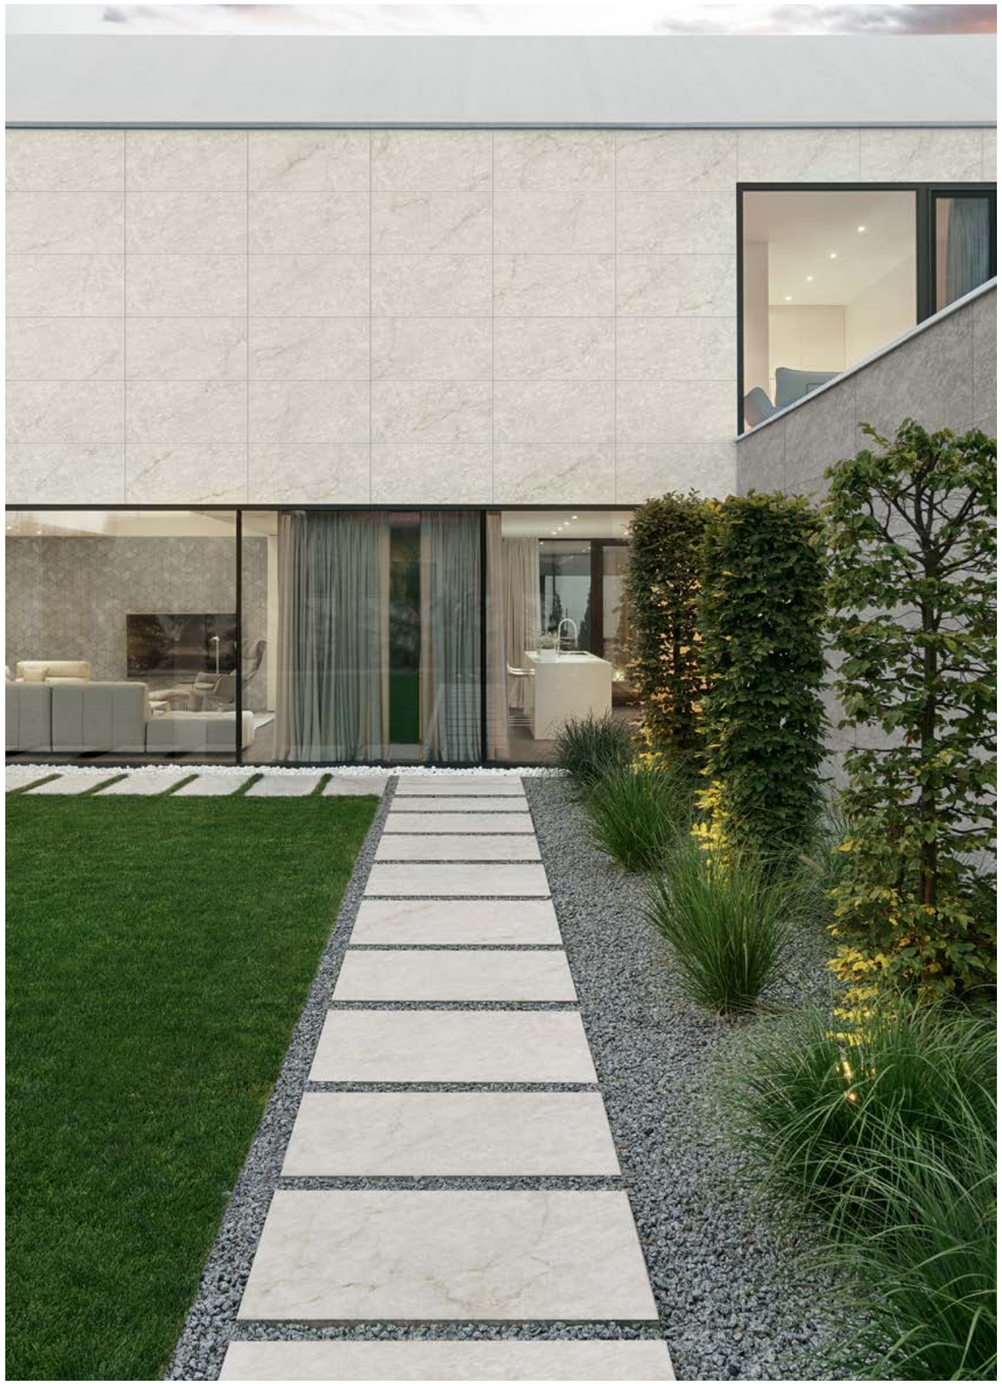

FLOOR
Outdoor Sensitech
Marvel X Fior di Bosco Hammered
60x120 cm | $23^{5}/_{8}$"x$47^{1}/_{4}$" ✱ 20 mm
Marvel X Calacatta Apuano Hammered
60x120 cm | $23^{5}/_{8}$"x$47^{1}/_{4}$" ✱ 20 mm

WALL
Marvel X Fior di Bosco Hammered
60x120 cm | $23^{5}/_{8}$"x$47^{1}/_{4}$"
Marvel X Calacatta Apuano Hammered
60x120 cm | $23^{5}/_{8}$"x$47^{1}/_{4}$"

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

FLOOR
Outdoor Sensitech
Marvel Travertine Sand Vein Cut
60x120 cm | 23 5/8"x47 1/4" ✱ 20 mm
Marvel Travertine White Vein Cut
60x120 cm | 23 5/8"x47 1/4" ✱ 20 mm

WALL
Marvel Travertine Sand Cross Cut
60x120 cm | 23 5/8"x47 1/4"

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

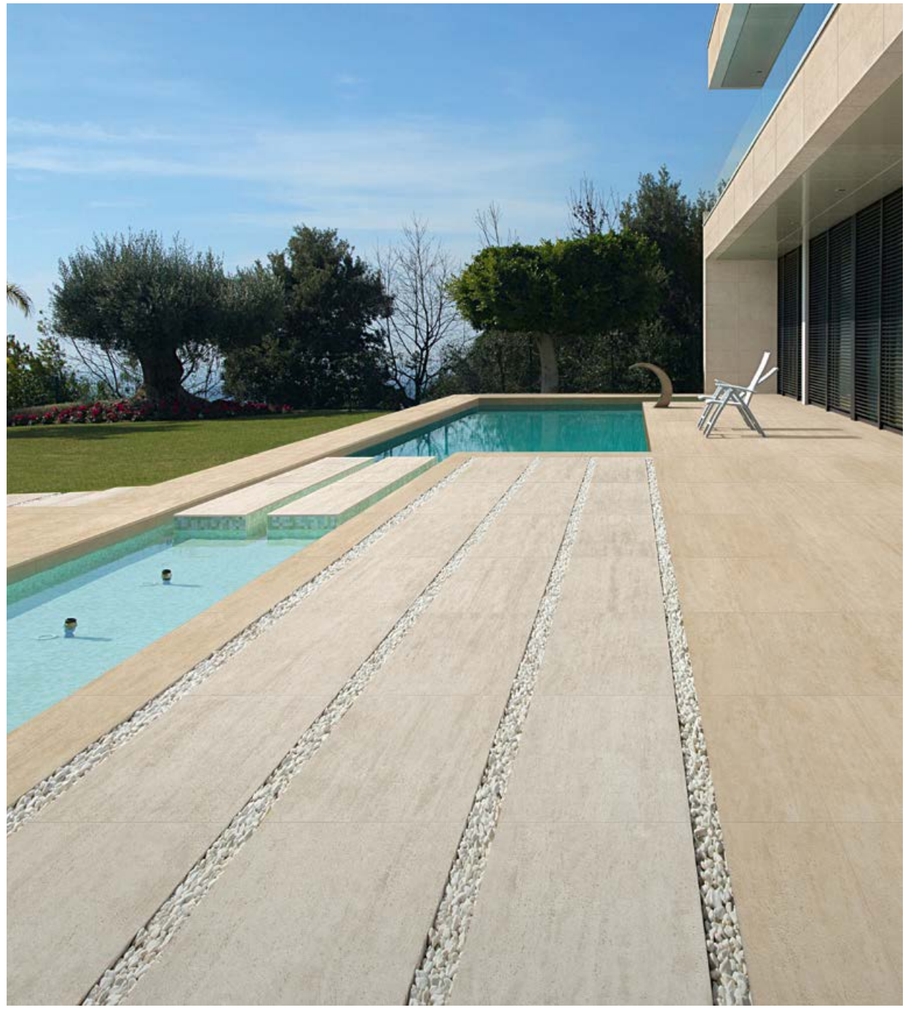

FLOOR
Outdoor Sensitech
Marvel Travertine Sand Vein Cut
60x120 cm | $23^{5}/_{8}$"x$47^{1}/_{4}$" ✠ 20 mm
Marvel Travertine White Vein Cut
60x120 cm | $23^{5}/_{8}$"x$47^{1}/_{4}$" ✠ 20 mm

WALL
Marvel Travertine Sand Cross Cut
60x120 cm | $23^{5}/_{8}$"x$47^{1}/_{4}$"

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

FLOOR
Grip Sensitech
Marvel Travertine Sand Cross Cut Grip
60x120 cm | $23^{5}/_{8}$"x$47^{1}/_{4}$"
Marvel Travertine Sand Cross Cut Elemento L Grip
33x120 h 4 cm | 13"x$47^{1}/_{4}$" h $1^{5}/_{8}$"

FACADE
Marvel Travertine Sand Vein Cut
60x120 cm | $23^{5}/_{8}$"x$47^{1}/_{4}$"

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

PRODUCT RANGE

TECHNICAL SPECIFICATIONS

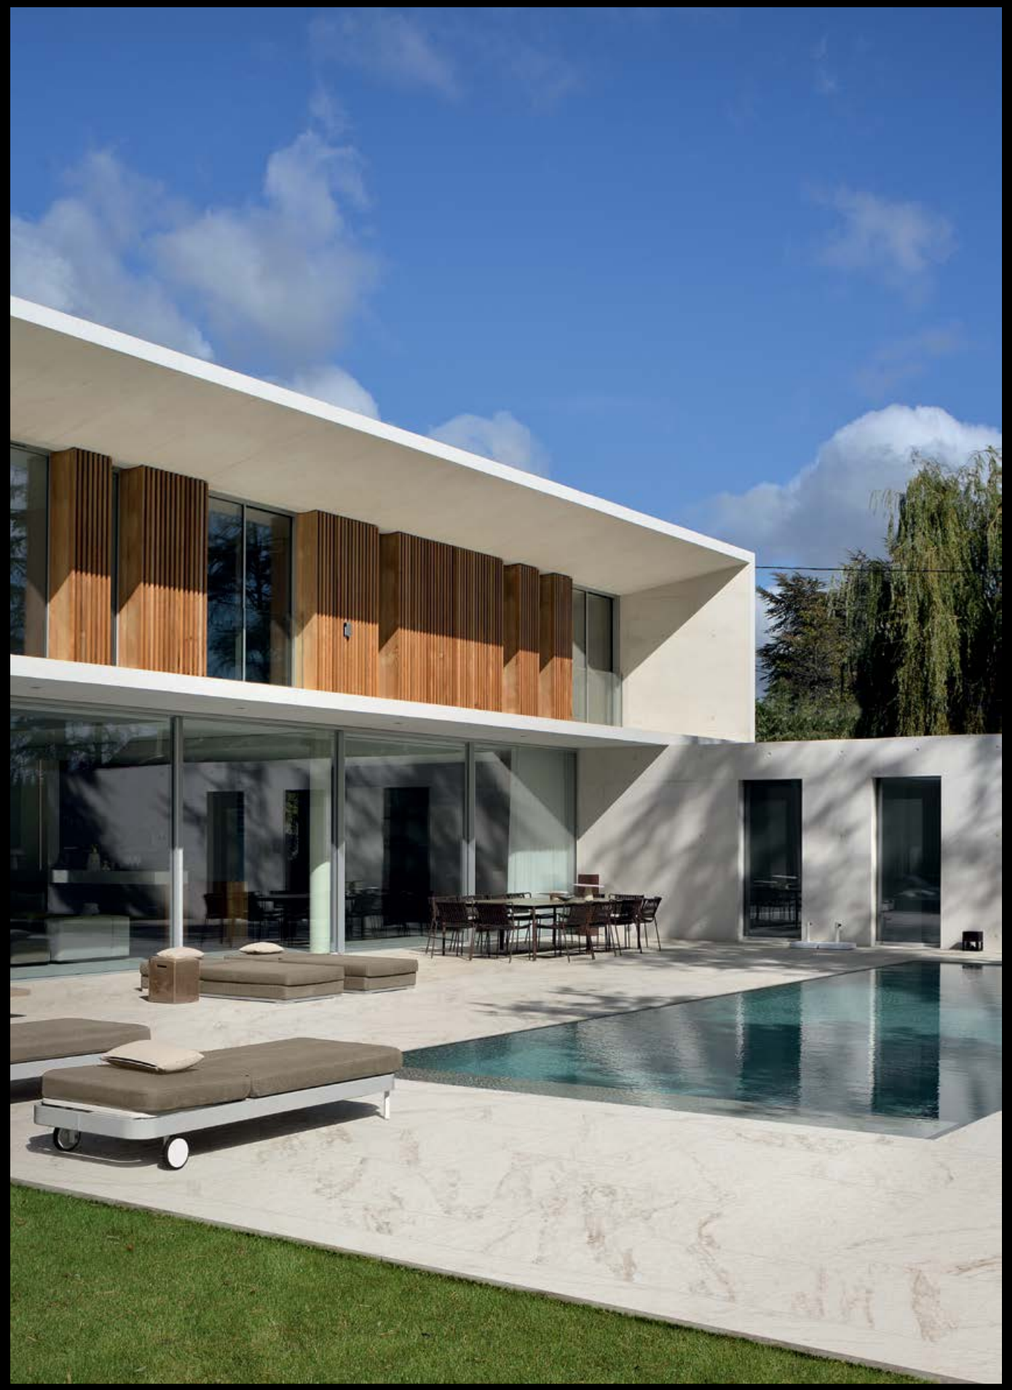

Product Range

Stone Look

- BOOST ICOR
- BOOST MINERAL
- BOOST MIX
- BOOST STONE
- BRAVE
- LIMS
- NORDE

Concrete Look

- BOOST
- BOOST PRO
- BOOST BALANCE
- BOOST EXPRESSION
- BOOST NATURAL
- BOOST NATURAL PRO
- PRISM

Wood Look

- LOG
- LOG CANSEI
- ENTICE
- ETIC PRO
- EXENCE

Marble Look

- MARVEL MERAVIGLIA
- MARVEL X
- MARVEL TRAVERTINE

INDEX

SIZE INDEX

SURFACE RANGE

IMAGE GALLERY

PRODUCT RANGE

STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK

TECHNICAL SPECIFICATIONS

Boost Icor

HEAVY TRAFFIC

Grip Sensitech ✠ 9 mm
Outdoor Sensitech ✠ 20 mm

R11 C Grip Sensitech ✠ 9 mm
R11 C Outdoor Sensitech ✠ 20 mm

V3 Moderate Variation

OUTDOOR ✠ 20 mm Sensitech

✠ 20 mm
120x120 cm - 47¹/₄"x47¹/₄"
AYCG Boost Icor Bone
AYCH Boost Icor Dust
AYCI Boost Icor Dune
AYCJ Boost Icor Oyster

✠ 20 mm
80x80 cm - 31¹/₂"x31¹/₂"
HBAX Boost Icor Bone
HBAY Boost Icor Dust
HBAZ Boost Icor Dune
HBA0 Boost Icor Oyster

✠ 20 mm
60x120 cm - 23⁵/₈"x47¹/₄"
AYCD Boost Icor Bone
AYCE Boost Icor Dust
AX8J Boost Icor Dune
AYCF Boost Icor Oyster

✠ 20 mm
60x60 cm - 23⁵/₈"x23⁵/₈"
AYCK Boost Icor Bone
AYCM Boost Icor Dust
AYCN Boost Icor Dune
AYCO Boost Icor Oyster

GRIP SURFACE Sensitech

✠ 9 mm
60x120 cm - 23⁵/₈"x47¹/₄"
AYA5 Boost Icor Bone
AYA6 Boost Icor Dust
AYA7 Boost Icor Dune
AYA8 Boost Icor Oyster
AYBQ Boost Icor Bone Railway

✠ 9 mm
30x60 cm - 11³/₄"x23⁵/₈" Railway *
AYBL Boost Icor Bone
AYBM Boost Icor Dust
AYBN Boost Icor Dune
AYBO Boost Icor Oyster

***Graphic decor. Misalignmants in the continuity between different patterns is normal for this type of product.**
Decoro grafico. Eventuali disallinesmenti nella continuità tra grafiche diverse sono una caratteristica intrinseca di questa tipologia di prodotto.

DECORS Sensitech



Pebble A: 0,259 mq
Pebble B: 0,252 mq



✠ 20 mm
Pebble A+B
59,5x59,5 cm - 23³/₈"x23³/₈"
AYZ1 Boost Icor Bone Pebble A+B
AYZ2 Boost Icor Dust Pebble A+B
AYZ3 Boost Icor Dune Pebble A+B
AYZ4 Boost Icor Oyster Pebble A+B

✠ 9 mm
Pebble A+B
59,5x59,5 cm - 23³/₈"x23³/₈"
AYZU Boost Icor Bone Pebble A+B
AYZV Boost Icor Dust Pebble A+B
AYZW Boost Icor Dune Pebble A+B
AYZX Boost Icor Oyster Pebble A+B

✠ 20 mm
Combo A
48,4x119 cm - 19¹/₈"x46⁷/₈"
AYZM Boost Icor Bone Combo A
AYZN Boost Icor Dust Combo A
AYZO Boost Icor Dune Combo A
AYZP Boost Icor Oyster Combo A

✠ 20 mm
Combo B
42,5x119 cm - 16³/₄"x46⁷/₈"
AYZQ Boost Icor Bone Combo B
AYZR Boost Icor Dust Combo B
AYZS Boost Icor Dune Combo B
AYZT Boost Icor Oyster Combo B

COLLECTION CATALOG

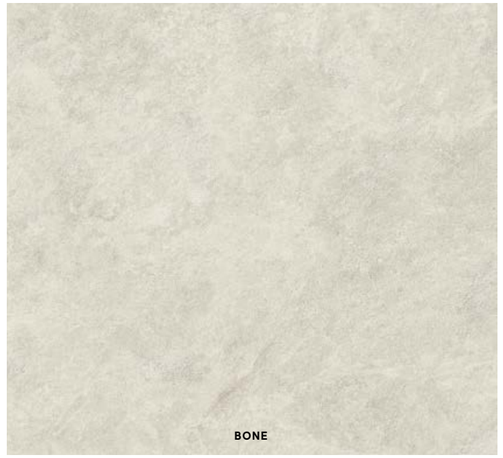
BONE

DUST

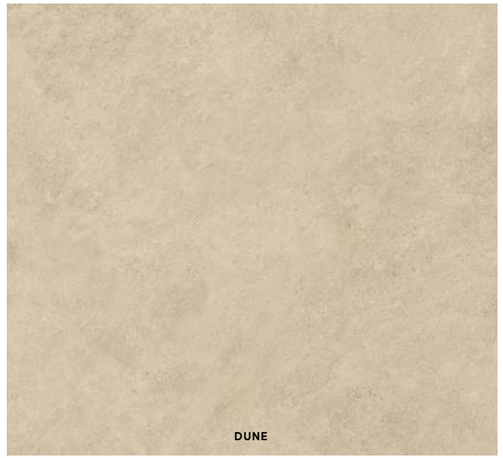
DUNE

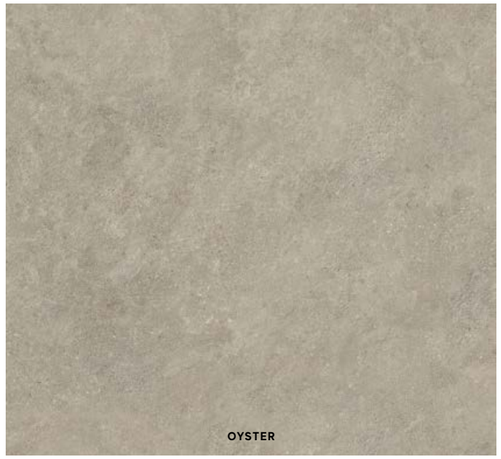
OYSTER

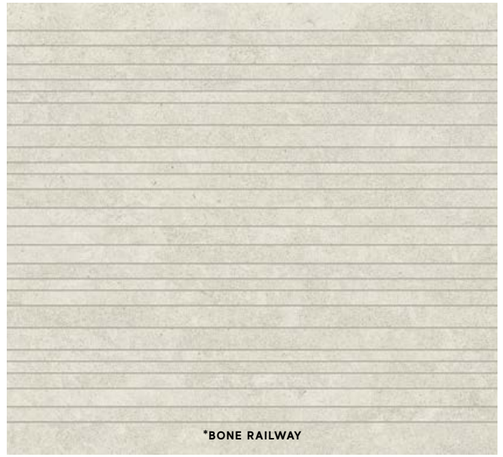
*BONE RAILWAY

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
PRODUCT RANGE
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
TECHNICAL SPECIFICATIONS

Boost Mineral

HEAVY TRAFFIC

Grip Sensitech ≑ 9 mm
Outdoor Sensitech ≑ 20 mm

R11 C Grip Sensitech ≑ 9 mm
R11 C Outdoor Sensitech ≑ 20 mm

V3 Moderate Variation

OUTDOOR ≑ 20 mm Sensitech

≑ 20 mm
120x120 cm - 47¹/₄"x47¹/₄"
AH37 Boost Mineral Smoke
AH38 Boost Mineral Tarmac
AH35 Boost Mineral White
AH36 Boost Mineral Grey

≑ 20 mm
60x120 cm - 23⁵/₈"x47¹/₄"
AH4B Boost Mineral Smoke
AH4C Boost Mineral Tarmac
AH39 Boost Mineral White
AH4A Boost Mineral Grey

≑ 20 mm
60x90 cm - 23⁵/₈"x35⁵/₈"
AH4F Boost Mineral Smoke
AH4G Boost Mineral Tarmac
AH4D Boost Mineral White
AH4E Boost Mineral Grey

≑ 20 mm
60x60 cm - 23⁵/₈"x23⁵/₈"
AH4J Boost Mineral Smoke
AH4K Boost Mineral Tarmac
AH4H Boost Mineral White
AH4I Boost Mineral Grey

GRIP SURFACE Sensitech

≑ 9 mm
60x120 cm - 23⁵/₈"x47¹/₄"
AHXJ Boost Mineral Smoke
AHXK Boost Mineral Tarmac
AHXG Boost Mineral White
AHXH Boost Mineral Pearl
AHXI Boost Mineral Grey

≑ 9 mm
60x60 cm - 23⁵/₈"x23⁵/₈"
AHXO Boost Mineral Smoke
AHXP Boost Mineral Tarmac
AHXL Boost Mineral White
AHXM Boost Mineral Pearl
AHXN Boost Mineral Grey

Sensitech

≑ 20 mm
Slice A+B (*)
60x120 cm - 23⁵/₈"x47¹/₄"
AIHN Boost Mineral White Slice A
AIHO Boost Mineral Grey Slice A
AIHP Boost Mineral Smoke Slice A
AIHQ Boost Mineral Tarmac Slice A
AIHR Boost Mineral White Slice B
AIHS Boost Mineral Grey Slice B
AIHT Boost Mineral Smoke Slice B
AIHU Boost Mineral Tarmac Slice B

DECORS

≑ 9 mm
Brick
30x60 cm - 11³/₄"x23⁵/₈"
AIGY Boost Mineral White
AIGZ Boost Mineral Pearl
AIG0 Boost Mineral Grey
AIG2 Boost Mineral Smoke
AIG3 Boost Mineral Tarmac



A: 59,5 cm - 18¹/₄"
B: 29,65 cm - 12⁵/₈"
b: 2,3 cm - 7¹/₂"

COLLECTION CATALOG

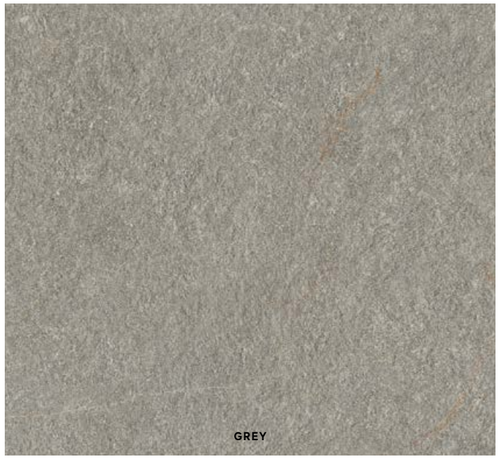

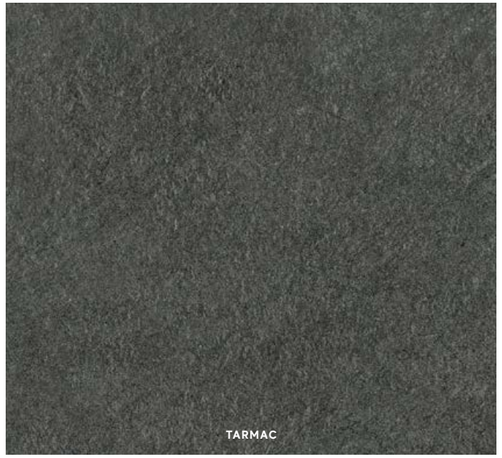

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
PRODUCT RANGE
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
TECHNICAL SPECIFICATIONS

Boost Mix

HEAVY TRAFFIC

Grip Sensitech ≑ 9 mm
Outdoor Sensitech ≑ 20 mm

R11 C Grip Sensitech ≑ 9 mm
R11 C Outdoor Sensitech ≑ 20 mm

V3 Moderate Variation

OUTDOOR ≑ 20 mm Sensitech

≑ 20 mm
120x120 cm - 47 1/4"x47 1/4"
A84U Boost Mix Ivory
A84V Boost Mix Pearl
A84W Boost Mix Smoke

≑ 20 mm
60x120 cm - 23 5/8"x47 1/4"
A84R Boost Mix Ivory
A84S Boost Mix Pearl
A84T Boost Mix Smoke

≑ 20 mm
60x60 cm - 23 5/8"x23 5/8"
A84O Boost Mix Ivory
A84P Boost Mix Pearl
A84Q Boost Mix Smoke

GRIP SURFACE Sensitech

≑ 9 mm
30x60 cm - 11 3/4"x23 5/8"
A8ØR Boost Mix Ivory
A8ØS Boost Mix Pearl
A8ØT Boost Mix Smoke

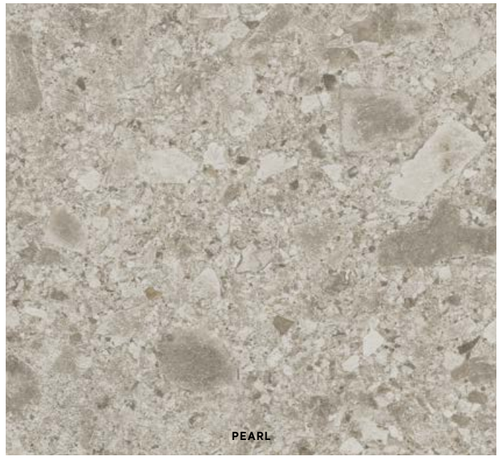

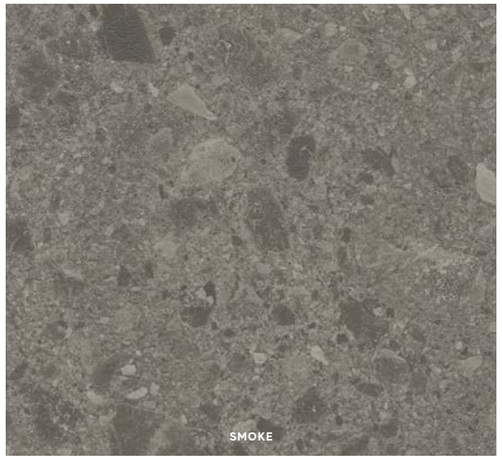

COLLECTION CATALOG

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
PRODUCT RANGE
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
TECHNICAL SPECIFICATIONS

Boost Stone

HEAVY TRAFFIC

Grip Sensitech ✣ 9 mm
Outdoor Sensitech ✣ 20 mm

R11 C Grip Sensitech ✣ 9 mm
R11 C Outdoor Sensitech ✣ 20 mm

V2 Slight Variation

OUTDOOR ✣ 20 mm Sensitech

✣ 20 mm
120x120 cm - 47¹/₄"x47¹/₄"
A67M Boost Stone White
A67N Boost Stone Cream
A67O Boost Stone Clay
A67P Boost Stone Grey
A7II Boost Stone Smoke
A67Q Boost Stone Tarmac

✣ 20 mm
60x120 cm - 23⁵/₈"x47¹/₄"
A67R Boost Stone White
A67S Boost Stone Cream
A67T Boost Stone Clay
A67U Boost Stone Grey
A7IJ Boost Stone Smoke
A67V Boost Stone Tarmac

✣ 20 mm
60x60 cm - 23⁵/₈"x23⁵/₈"
A67W Boost Stone White
A67X Boost Stone Cream
A67Y Boost Stone Clay
A67Z Boost Stone Grey
A7IK Boost Stone Smoke
A67Ø Boost Stone Tarmac

GRIP SURFACE Sensitech

✣ 9 mm
60x120 cm - 23⁵/₈"x47¹/₄"
A66R Boost Stone White
A66S Boost Stone Ivory
A66T Boost Stone Cream
A66U Boost Stone Clay
A66V Boost Stone Taupe
A66Z Boost Stone Tobacco
A66W Boost Stone Pearl
A66X Boost Stone Grey
A66Y Boost Stone Smoke
A66Ø Boost Stone Tarmac

✣ 9 mm
30x60 cm - 11³/₄"x23⁵/₈"
A661 Boost Stone White
A662 Boost Stone Ivory
A663 Boost Stone Cream
A664 Boost Stone Clay
A665 Boost Stone Taupe
A669 Boost Stone Tobacco
A666 Boost Stone Pearl
A667 Boost Stone Grey
A668 Boost Stone Smoke
A67A Boost Stone Tarmac

DECORS

Boost Stone Pearl
Mosaico Brick 30x60 cm - 11³/₄"x23⁵/₈"
A7C3 Boost Stone White
A7C4 Boost Stone Ivory
A7C5 Boost Stone Cream
A7C6 Boost Stone Clay
A7C7 Boost Stone Taupe
A7DB Boost Stone Tobacco
A7C8 Boost Stone Pearl
A7C9 Boost Stone Grey
A7DA Boost Stone Smoke
A7DC Boost Stone Tarmac



A: 3,9x60 cm - 1¹/₂"x23⁵/₈"
B: 1,7x60 cm- ⁵/₈"x23⁵/₈"
C: 4,6x60 cm - 1³/₄"x23⁵/₈"

COLLECTION CATALOG

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
PRODUCT RANGE
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
TECHNICAL SPECIFICATIONS

Brave

HEAVY TRAFFIC

Grip Sensitech ✠ 9 mm
Outdoor Sensitech ✠ 20 mm

R11 C Grip Sensitech ✠ 9 mm
R11 C Outdoor Sensitech ✠ 20 mm

V2 Slight Variation

OUTDOOR ✠ 20 mm Sensitech

✠ 20 mm
60x120 cm - 23⁵/₈"x47¹/₄"
AT5I Brave Gypsum
AT5J Brave Pearl
AT5K Brave Grey
AT5L Brave Earth
AT5M Brave Coke

✠ 20 mm
60x60 cm - 23⁵/₈"x23⁵/₈"
AXAT Brave Gypsum
AXAU Brave Pearl
AXAV Brave Grey
AXAW Brave Earth
AXAX Brave Coke

GRIP SURFACE Sensitech

✠ 9 mm
30x60 cm - 11³/₄"x23⁵/₈"
DØ51 Brave Gypsum
DØ52 Brave Pearl
DØ53 Brave Grey
DØ54 Brave Earth
DØ55 Brave Coke

DECORS

Brave Listello 8x60 cm - 3¹/₈"x23⁵/₈"
A1X5 Brave Gypsum
A1X4 Brave Grey
A1X2 Brave Coke
A1X6 Brave Pearl
A1X3 Brave Earth

COLLECTION CATALOG

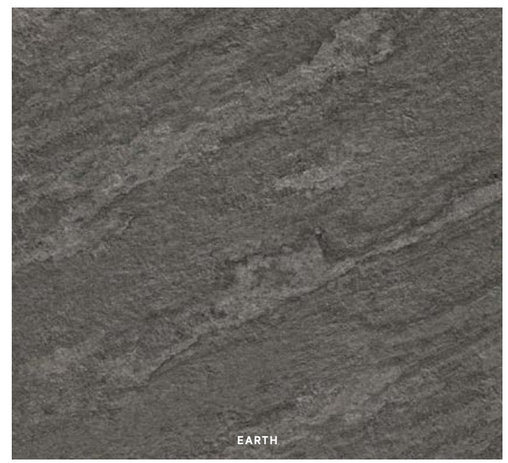

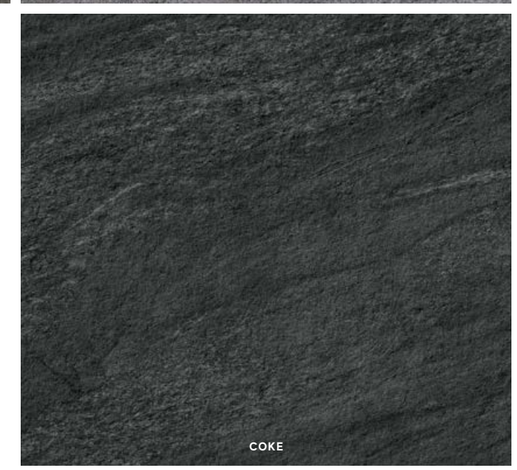

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
PRODUCT RANGE
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
TECHNICAL SPECIFICATIONS

Lims

HEAVY TRAFFIC

Outdoor Sensitech ✠ 20 mm

R11 C Outdoor Sensitech ✠ 20 mm

V3 Moderate Variation

OUTDOOR ✠ 20 mm Sensitech

✠ 20 mm
60x120 cm - 23⁵/₈"x47¹/₄"
A3LU Lims Ivory
A3LV Lims Beige

✠ 20 mm
60x60 cm - 23⁵/₈"x23⁵/₈"
A3LY Lims Ivory
A3LZ Lims Beige

COLLECTION CATALOG

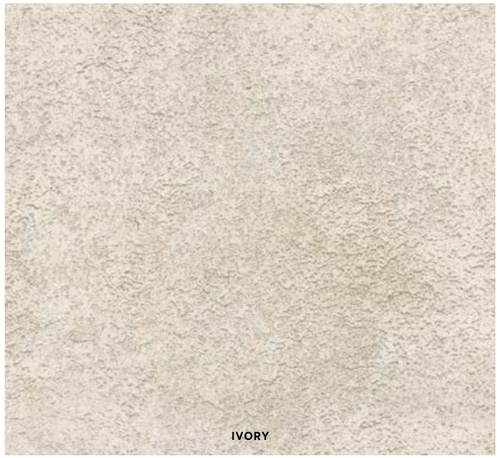

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
PRODUCT RANGE
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
TECHNICAL SPECIFICATIONS

Norde

HEAVY TRAFFIC
Roccia ✠ 9 mm
Grip Sensitech ✠ 9 mm
Outdoor Sensitech ✠ 20 mm

R12 C Roccia ✠ 9 mm
R11 C Grip Sensitech ✠ 9 mm
R11 C Outdoor Sensitech ✠ 20 mm

V3 Moderate Variation

OUTDOOR ✠ 20 mm Sensitech

✠ 20 mm
60x120 cm - 23⅝"x47¼"
A5TV Norde Magnesio
A5TW Norde Oro
A451 Norde Platino
A5TX Norde Piombo

✠ 20 mm
60x90 cm - 23⅝"x35⅝"
A5T2 Norde Magnesio
A5T3 Norde Oro
A5T4 Norde Platino
A5T5 Norde Piombo

✠ 20 mm
80x80 cm - 31½"x31½"
A56L Norde Magnesio
A56M Norde Oro
A56N Norde Platino
A56O Norde Piombo

✠ 20 mm
60x60 cm - 23⅝"x23⅝"
A5TY Norde Magnesio
A5TZ Norde Oro
A5TØ Norde Platino
A5T1 Norde Piombo

GRIP SURFACE Sensitech

✠ 9 mm
60x120 cm - 23⅝"x47¼"
A5MH Norde Magnesio
A5MI Norde Oro
A45Ø Norde Platino
A5MJ Norde Piombo

ROCCIA SURFACE

✠ 9 mm
30x60 cm - 11¾"x23⅝"
A5NA Norde Magnesio
A5NB Norde Oro
A5NC Norde Platino
A45Y Norde Piombo

Sensitech

✠ 20 mm
Norde Path A+B*
54x54 cm - 21¼"x21¼"
A58M Norde Magnesio
A58N Norde Oro
A58O Norde Platino
A58P Norde Piombo

✠ 20 mm
Norde Path C*
55x109 cm - 21⅝"x42⅞"
A58Q Norde Magnesio
A58R Norde Oro
A58S Norde Platino
A58T Norde Piombo

✠ 9 mm
Norde Composizione Palladiana Grip**
A58U Norde Magnesio
A58V Norde Oro
A58W Norde Platino
A58X Norde Piombo

*** We recommend "dry" installation on gravel and/or grass . Si consiglia posa "a secco" su ghiaia e/o erba** . Pose « à sec » sur gravillons et/ou herbe conseillée . Es wird eine Trockenverlegung auf Kies bzw. Rasen empfohlen . Se recomienda colocación «en seco» sobre grava o hierba . Рекомендуется «сухая» укладка на гравий и/или траву.

**** Example of layout measuring about 1 m². Minimum order: 8 m². Variable tessera size and shape with tumbled edge. We recommend installation with a joint of no less than 10 mm . Esempio di posato corrispondente a circa 1 mq. Ordine minimo di 8 mq. Dimensione e forma delle tessere variabile con bordo burattato. Si consiglia posa con fuga non inferiore a 10mm** . Exemple de produit posé correspondant à 1 mètre carré environ. Commande minimum: 8 mètres carrés. Dimensions et forme des tesselles variables avec bord tamisé. Pose conseillée avec un joint non inférieur à 10mm . Verlegebeispiel für circa 1 qm. Mindestbestellmenge 8 qm. Abmessung und Form der Steine sind unterschiedlich, aber alle weisen getrommelte Kanten auf. Für die Verlegung wird eine Fugenbreite von nicht wenige r als 10 mm empfohlen . Ejemplo de colocación correspondiente aproximadamente a 1 m. Pedido mínimo de 8 m. Tamaño y forma variable de los mosaicos con borde bruñido. Se recomienda colocación con junta de no menos de 10 mm . Пример укладки, соответствующий примерно 1 кв.м. Минимальный объем заказа – 8 кв.м. Размер и форма чипс варьируются, чипсы имеют выщербленные края. Рекомендуется укладка с межплиточным швом не менее 10 мм.

DECORS

Norde Brick
30x60 cm - 11¾"x23⅝"
A59P Norde Magnesio
A59Q Norde Oro
A59R Norde Platino
A59S Norde Piombo



A: 2,1x24,8 cm - ¾"x9¾"
B: 2,1x34,5 cm - ¾"x13⅝"
C: 3,3x34,5 cm - 1¾"x13⅝"
D: 3,3x24,8 cm - 1¾"x9¾"
E: 2,5x60 cm - 1"x23⅝"

COLLECTION CATALOG

OUTDOOR 20 mm / GRIP

ROCCIA

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
PRODUCT RANGE
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
TECHNICAL SPECIFICATIONS

Boost
Boost Pro

HEAVY TRAFFIC

Grip Sensitech ✠ 9 mm
Outdoor Sensitech ✠ 20 mm

R11 C Grip Sensitech ✠ 9 mm
R11 C Outdoor Sensitech ✠ 20 mm

V3 Moderate Variation

OUTDOOR ✠ 20 mm Sensitech

✠ 20 mm
120x120 cm - 47 1/4"x47 1/4"
AMG3 Boost White
AMG5 Boost Grey
AMG6 Boost Smoke
AMG7 Boost Tarmac

A3DD Boost Pro Cream
A3DE Boost Pro Clay
A3DF Boost Pro Taupe
A3DH Boost Pro Tobacco

✠ 20 mm
60x120 cm - 23 5/8"x47 1/4"
AL8Ø Boost White
AL81 Boost Grey
AL82 Boost Smoke
AL83 Boost Tarmac

A4XU Boost Pro Cream
A4XV Boost Pro Clay
A4XW Boost Pro Taupe
A4XX Boost Pro Tobacco

✠ 20 mm
80x80 cm - 31 1/2"x31 1/2"
HANB Boost White
HANC Boost Grey
HAND Boost Smoke
HANE Boost Tarmac

HAN6 Boost Pro Cream
HAN7 Boost Pro Clay
HAN8 Boost Pro Taupe
HAOA Boost Pro Tobacco

✠ 20 mm
60x60 cm - 23 5/8"x23 5/8"
A3TJ Boost White
A3TK Boost Grey
A3TL Boost Smoke
A3TM Boost Tarmac

A4XQ Boost Pro Cream
A4XR Boost Pro Clay
A4XS Boost Pro Taupe
A4XT Boost Pro Tobacco

GRIP SURFACE Sensitech

✠ 9 mm
120x120 cm - 47 1/4"x47 1/4"
AMGN Boost White
AMGO Boost Pearl
AMGP Boost Grey
AMGQ Boost Smoke
AMGR Boost Tarmac

AØAO Boost Pro Ivory
AØAQ Boost Pro Cream
AØBV Boost Pro Clay
AØBW Boost Pro Taupe
AØBX Boost Pro Tobacco

COLLECTION CATALOG
BOOST

COLLECTION CATALOG
BOOST PRO

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
PRODUCT RANGE
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
TECHNICAL SPECIFICATIONS

Boost Balance

HEAVY TRAFFIC

Grip Sensitech ≠ 9 mm
Outdoor Sensitech ≠ 20 mm

R11 C Grip Sensitech ≠ 9 mm
R11 C Outdoor Sensitech ≠ 20 mm

V2 Slight Variation

OUTDOOR ≠ 20 mm Sensitech

≠ 20 mm
120x120 cm - 47 1/4"x47 1/4"
AJPE Boost Balance White
AJPF Boost Balance Ash
AJMH Boost Balance Pearl
AJPG Boost Balance Grey

≠ 20 mm
60x120 cm - 23 5/8"x47 1/4"
AJPH Boost Balance White
AJPI Boost Balance Ash
AJPJ Boost Balance Pearl
AJPK Boost Balance Grey

≠ 20 mm
60x60 cm - 23 5/8"x23 5/8"
AJPL Boost Balance White
AJPM Boost Balance Ash
AJPN Boost Balance Pearl
AJPO Boost Balance Grey

GRIP SURFACE Sensitech

≠ 9 mm
120x120 cm - 47 1/4"x47 1/4"
AJNC Boost Balance Pure
AJND Boost Balance White
AJNE Boost Balance Ivory
AJNF Boost Balance Cream
AJNG Boost Balance Ash
AJNH Boost Balance Moon
AJNI Boost Balance Pearl
AJNJ Boost Balance Grey
AJNK Boost Balance Smoke
AJNL Boost Balance Tarmac

COLLECTION CATALOG

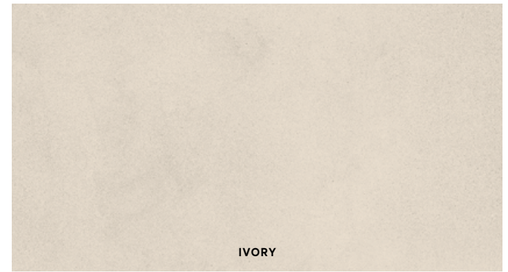

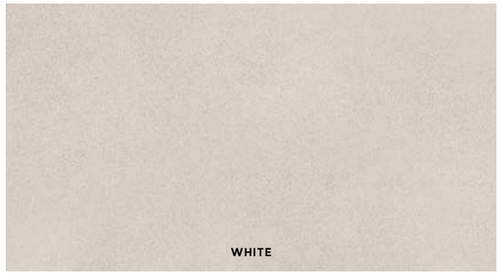

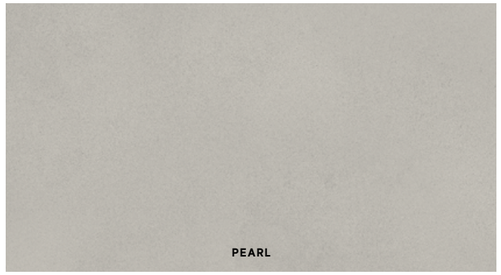

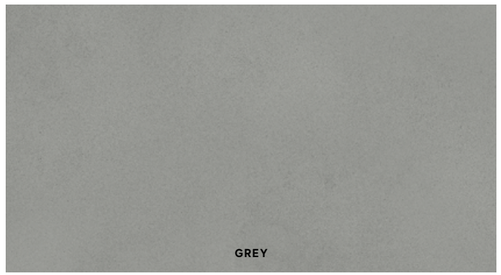

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
PRODUCT RANGE
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
TECHNICAL SPECIFICATIONS

Boost Expression

HEAVY TRAFFIC

Grip Sensitech ≠ 9 mm
Outdoor Sensitech ≠ 20 mm

R11 C Grip Sensitech ≠ 9 mm
R11 C Outdoor Sensitech ≠ 20 mm

V2 Slight Variation

OUTDOOR ≠ 20 mm Sensitech

≠ 20 mm
120x120 cm - 47¹/₄"x47¹/₄"
AYRT Boost Expression Haze
AYRS Boost Expression Ice
AYRU Boost Expression Shell

≠ 20 mm
80x80 cm - 31¹/₂"x31¹/₂"
AYRZ Boost Expression Haze
AYRY Boost Expression Ice
AYRØ Boost Expression Shell

≠ 20 mm
60x120 cm - 23⁵/₈"x47¹/₄"
AYRW Boost Expression Haze
AYRV Boost Expression Ice
AYRX Boost Expression Shell

≠ 20 mm
60x60 cm - 23⁵/₈"x23⁵/₈"
AYR2 Boost Expression Haze
AYR1 Boost Expression Ice
AYR3 Boost Expression Shell

GRIP SURFACE Sensitech

≠ 9 mm
120x120 cm - 47¹/₄"x47¹/₄"
AYUO Boost Expression Haze
AYUR Boost Expression Camel
AYUS Boost Expression Tan
AYUN Boost Expression Ice
AYUQ Boost Expression Glow
AYUP Boost Expression Shell

≠ 9 mm
60x120 cm - 23⁵/₈"x47¹/₄"
AYU1 Boost Expression Haze
AYU4 Boost Expression Camel
AYU5 Boost Expression Tan
AYUØ Boost Expression Ice
AYU3 Boost Expression Glow
AYU2 Boost Expression Shell

COLLECTION CATALOG

GLOW

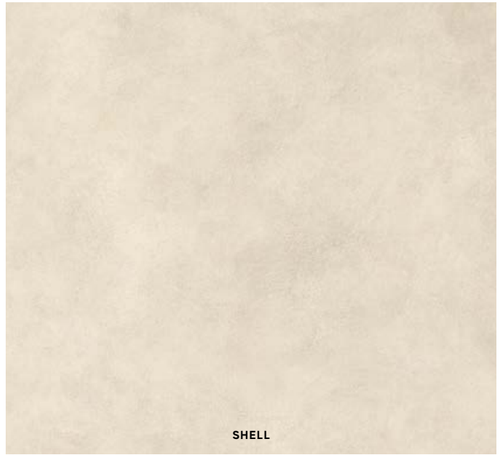
SHELL

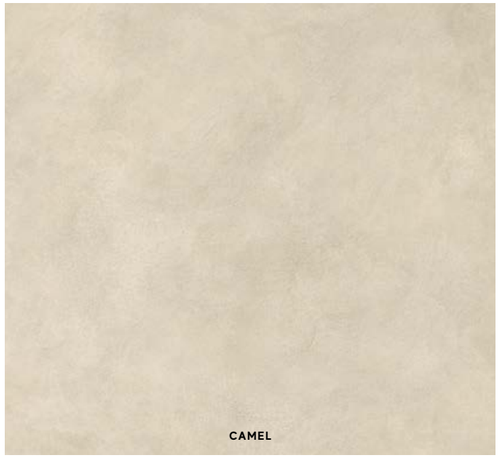
CAMEL

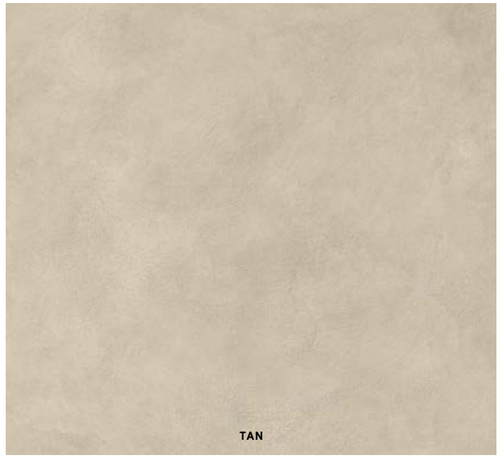
TAN

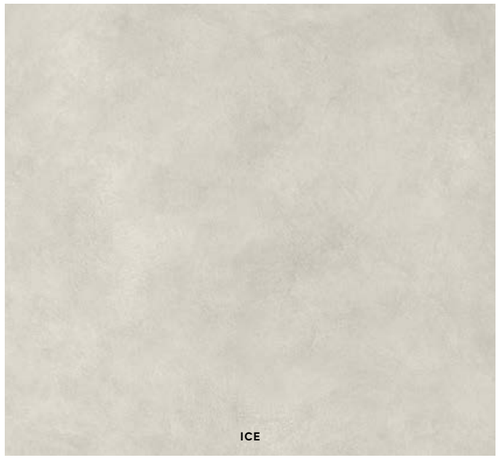
ICE

HAZE

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
PRODUCT RANGE
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
TECHNICAL SPECIFICATIONS

Boost Natural
Boost Natural Pro

HEAVY TRAFFIC

Grip Sensitech ≠ 9 mm
Outdoor Sensitech ≠ 20 mm

R11 C Grip Sensitech ≠ 9 mm
R11 C Outdoor Sensitech ≠ 20 mm

V2 Slight Variation

OUTDOOR ≠ 20 mm Sensitech

≠ 20 mm
120x120 cm - 47¹/₄"x47¹/₄"
A7Q9 Boost Natural Ecru
A7Q7 Boost Natural Kaolin
A7Q8 Boost Natural Ash

ARB2 Boost Natural Pro Oat
ARB4 Boost Natural Pro Cinder

≠ 20 mm
60x60 cm - 23⁵/₈"x23⁵/₈"
A7RC Boost Natural Ecru
A7RA Boost Natural Kaolin
A7RB Boost Natural Ash

ARB8 Boost Natural Pro Oat
ARB9 Boost Natural Pro Cinder

≠ 20 mm
60x120 cm - 23⁵/₈"x47¹/₄"
ARB6 Boost Natural Pro Oat
ARB7 Boost Natural Pro Cinder

GRIP SURFACE Sensitech

≠ 9 mm
120x120 cm - 47¹/₄"x47¹/₄"
A655 Boost Natural Ecru
A656 Boost Natural Umber
A657 Boost Natural Coal
A653 Boost Natural Kaolin
A654 Boost Natural Ash

AQ9J Boost Natural Pro Salt
AQ9K Boost Natural Pro Oat
AQ9L Boost Natural Pro Sand
AQ9M Boost Natural Pro Cinder
AQ9N Boost Natural Pro Dove

≠ 9 mm
60x120 cm - 23⁵/₈"x47¹/₄"
A65Ø Boost Natural Ecru
A651 Boost Natural Umber
A652 Boost Natural Coal
A65Y Boost Natural Kaolin
A65Z Boost Natural Ash

AQ9P Boost Natural Pro Salt
AQ9Q Boost Natural Pro Oat
AQ9R Boost Natural Pro Sand
AQ9S Boost Natural Pro Cinder
AQ9T Boost Natural Pro Dove

COLLECTION CATALOG
BOOST NATURAL

COLLECTION CATALOG
BOOST NATURAL PRO

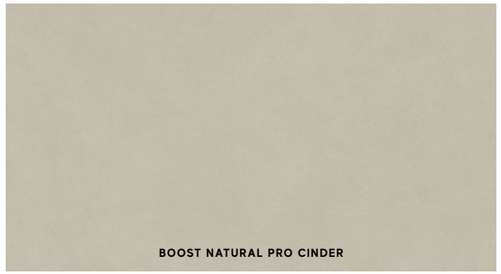

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
PRODUCT RANGE
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
TECHNICAL SPECIFICATIONS

Prism

HEAVY TRAFFIC

Grip Sensitech ✠ 9 mm
Outdoor Sensitech ✠ 20 mm

R11 C Grip Sensitech ✠ 9 mm
R11 C Outdoor Sensitech ✠ 20 mm

V2 Slight Variation

OUTDOOR ✠ 20 mm Sensitech

✠ 20 mm
120x120 cm - 47 1/4"x47 1/4"
A5ON Prism Cord
A5OO Prism Cloud
A5OP Prism Fog
A5OM Prism Suede

✠ 20 mm
80x80 cm - 31 1/2"x31 1/2"
A56I Prism Cord
A56J Prism Cloud
A56K Prism Fog
A56H Prism Suede

GRIP SURFACE Sensitech

✠ 9 mm
120x120 cm - 47 1/4"x47 1/4"
A5OJ Prism Cord
A5OK Prism Cloud
A5OL Prism Fog
A5OI Prism Suede

COLLECTION CATALOG

OUTDOOR 20 mm

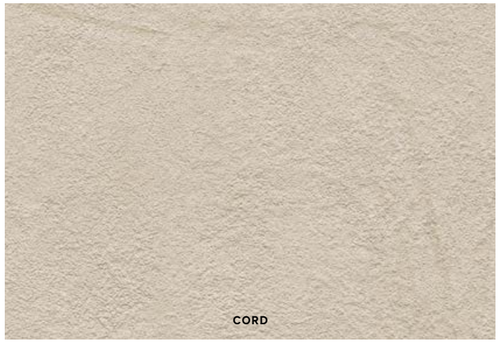

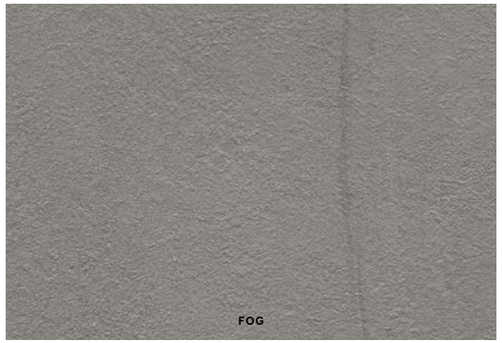

GRIP

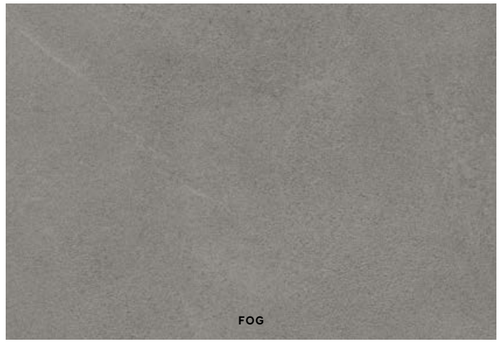

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
PRODUCT RANGE
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
TECHNICAL SPECIFICATIONS

Log

HEAVY TRAFFIC

Grip Sensitech ≠ 9 mm
Outdoor Sensitech ≠ 20 mm

R11 C Grip Sensitech ≠ 9 mm
R11 C Outdoor Sensitech ≠ 20 mm

V3 Moderate Variation

OUTDOOR ≠ 20 mm Sensitech

≠ 20 mm
30x120cm - 11³/₄"x47¹/₄"
AX4A Log Icon Oak Forest
AX4B Log Bright Oak Forest
AX4C Log Amber Oak Forest
AX4D Log Deep Oak Forest
AX4E Log Moon Oak Forest

GRIP SURFACE Sensitech

≠ 9 mm
20x120cm - 7⁷/₈"x47¹/₄"
AX4H Log Icon Oak Forest
AX4I Log Bright Oak Forest
AX4J Log Amber Oak Forest
AX4K Log Deep Oak Forest
AX4L Log Moon Oak Forest

≠ 20 mm
60x120cm - 23⁵/₈"x47¹/₄" Deck ▲
AXØT Log Icon Oak Deck

≠ 20 mm
60x120cm - 23⁵/₈"x47¹/₄" Deck ▲
AXØU Log Bright Oak Deck

▲Graphic pattern. Misalignments in the continuity between different patterns is normal for this type of product.
Decoro grafico. Eventuali disallineamenti nella continuità tra grafiche diverse sono una caratteristica intrinseca di questa tipologia di prodotto.

COLLECTION CATALOG

ICON OAK FOREST

BRIGHT OAK FOREST

AMBER OAK FOREST

DEEP OAK FOREST

MOON OAK FOREST

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
PRODUCT RANGE
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
TECHNICAL SPECIFICATIONS

Log Cansei

HEAVY TRAFFIC

Grip Sensitech ≑ 9 mm

R11 C Grip Sensitech ≑ 9 mm

V3 Moderate Variation

GRIP SURFACE Sensitech

≑ 9 mm
20x120cm - 7⅞"x47¼"
AX7J Log Cansei Sospiro
AX7K Log Cansei Rialto
AX7L Log Cansei Fenice
AX7M Log Cansei Murano
AX7N Log Cansei Darsena

COLLECTION CATALOG

SOSPIRO

RIALTO

FENICE

MURANO

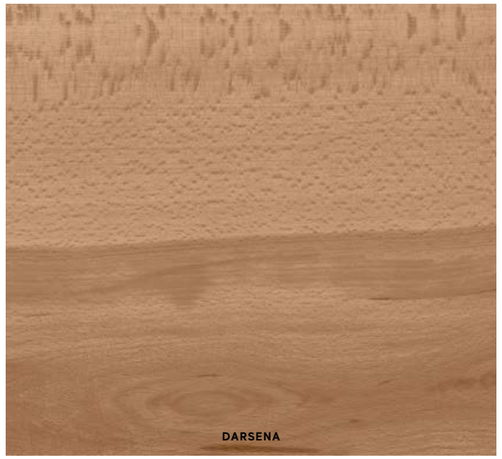
DARSENA

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
PRODUCT RANGE
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
TECHNICAL SPECIFICATIONS

Entice

HEAVY TRAFFIC

Grip Sensitech ≑ 9 mm
Outdoor Sensitech ≑ 20 mm

R11 C Grip Sensitech ≑ 9 mm
R11 C Outdoor Sensitech ≑ 20 mm

V2 Slight Variation

OUTDOOR ≑ 20 mm Sensitech

≑ 20 mm
30x120 cm - 11³/₄"x47¹/₄"
A9DD Entice Pale Oak Natural
A9DE Entice Copper Oak Natural
A9DF Entice Browned Oak Natural
A9DG Entice Ash Oak Natural

GRIP SURFACE Sensitech

≑ 9 mm
20x120 cm - 7⁷/₈"x47¹/₄"
A842 Entice Pale Oak Natural
A843 Entice Copper Oak Natural
A844 Entice Browned Oak Natural
A845 Entice Ash Oak Natural

COLLECTION CATALOG

ENTICE

Etic Pro

HEAVY TRAFFIC

Outdoor Sensitech ≑ 20 mm

R11 C Outdoor Sensitech ≑ 20 mm

V3 Moderate Variation

OUTDOOR ≑ 20 mm Sensitech

≑ 20 mm
30x120 cm - 11³/₄"x47¹/₄"
AV42 Etic Pro Rovere Venice

SEE MORE

ETIC PRO

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
PRODUCT RANGE
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
TECHNICAL SPECIFICATIONS

Exence

HEAVY TRAFFIC

Grip Sensitech ≠ 9 mm
Outdoor Sensitech ≠ 20 mm

R11 C Grip Sensitech ≠ 9 mm
R11 C Outdoor Sensitech ≠ 20 mm

V3 Moderate Variation

OUTDOOR ≠ 20 mm Sensitech

≠ 20 mm
30x120cm - 11³/₄"x47¹/₄"
A2RY Exence Almond
A2RZ Exence Amber

GRIP SURFACE Sensitech

≠ 9 mm
18,5x150 cm - 7¹/₄"x59"
AOUK Exence Vanilla
AOUI Exence Almond
AOUJ Exence Amber

DECORS

Exence Tatami 18,5x75 cm - 7¹/₄"x29¹/₂
AOUR Exence Vanilla
AOUS Exence Almond
AOUT Exence Amber



2,85x74,4 cm - 1¹/₈"x29³/₈"

COLLECTION CATALOG

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
PRODUCT RANGE
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
TECHNICAL SPECIFICATIONS

Marvel Meraviglia

HEAVY TRAFFIC | Outdoor Sensitech ✣ 20 mm | **R11 C** Outdoor Sensitech ✣ 20 mm | V3 Moderate Variation

OUTDOOR ✣ 20 mm Sensitech

✣ 20 mm
60x120 cm - 23 5/8"x47 1/4"
AJPQ Marvel Meraviglia Calacatta Meraviglia Hammered
AJPR Marvel Meraviglia Calacatta Bernini Hammered
AJPS Marvel Meraviglia Grigio Elegante Hammered

COLLECTION CATALOG

CALACATTA MERAVIGLIA

CALACATTA BERNINI

GRIGIO ELEGANTE

Marvel X

HEAVY TRAFFIC | Outdoor Sensitech ✣ 20 mm | **R11 C** Outdoor Sensitech ✣ 20 mm | V3 Moderate Variation

OUTDOOR ✣ 20 mm Sensitech

✣ 20 mm
60x120 cm - 23 5/8"x47 1/4"
AGFA Marvel X Calacatta Apuano Hammered
AGFB Marvel X Fior di Bosco Hammered

COLLECTION CATALOG

CALACATTA APUANO HAMMERED

FIOR DI BOSCO HAMMERED

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
PRODUCT RANGE
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
TECHNICAL SPECIFICATIONS

Marvel Travertine

HEAVY TRAFFIC

Grip Sensitech ✠ 9 mm
Outdoor Sensitech ✠ 20 mm

R11 C Grip Sensitech ✠ 9 mm
R11 C Outdoor Sensitech ✠ 20 mm

V3 Moderate Variation

OUTDOOR ✠ 20 mm Sensitech

✠ 20 mm
60x120 cm - 23⁵/₈"x47¹/₄"
AGE7 Marvel Travertine White Vein Cut
AGE8 Marvel Travertine Sand Vein Cut
AGE9 Marvel Travertine Pearl Vein Cut

GRIP SURFACE Sensitech

✠ 9 mm
60x120 cm - 23⁵/₈"x47¹/₄"
AFUC Marvel Travertine White Vein Cut
AFUD Marvel Travertine Sand Vein Cut
AFUE Marvel Travertine Pearl Vein Cut
AFUH Marvel Travertine White Cross Cut
AFUI Marvel Travertine Sand Cross Cut
AFUJ Marvel Travertine Pearl Cross Cut

COLLECTION CATALOG

WHITE VEIN CUT

WHITE CROSS CUT

SAND VEIN CUT

SAND CROSS CUT

PEARL VEIN CUT

PEARL CROSS CUT

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
PRODUCT RANGE
STONE LOOK
CONCRETE LOOK
WOOD LOOK
MARBLE LOOK
TECHNICAL SPECIFICATIONS

Technical Specifications

- ENVIRONMENTAL SUSTAINABILITY
- CERTIFICATIONS
- SENSITECH
- CLEANING AND MAINTENANCE
- V-SHADE, COLOUR-SHADING
- TRIM TILES
- TECHNICAL SPECIFICATIONS
- RAISED INSTALLATION
- PACKING

Responsibility

Circularity

- 100% of cooked and raw waste recovered internally
- 90% recovered waste
- 100% water recovered for internal use
- 100% recyclable packaging materials

Environment, health and safety

- Advanced purification systems, which contribute to the containment of atmospheric emissions
- Reduction of CO_2 emissions due to automated vertical warehouse
- RTO system to reduce harmful emissions and odours
- 0% lead, cadmium, and other dangerous substances in products
- All Atlas Concorde surfaces do not release harmful levels of VOCs (Volatile Organic Compounds)

Reduction & self-production of energy

- Heat recoveries from industrial furnaces
- Efficient methane gas cogeneration plant
- 100% LED light
- Recovery of residual heat energy by tube heat exchangers
- Photovoltaic system producing over 4 GWh annually

Ceramics of Italy

MADE IN ITALY

For Atlas Concorde, being Made in Italy is not just a prestigious certification of style, design, and production excellence, but an identity that involves all aspects of its business. For this reason, we identify with the values expressed by Confindustria Ceramica's ethical code, which guarantee absolute compliance with labor regulations, and with the marks Made in Italy and Ceramics of Italy, which certify the quality of authentic Italian style.

Certifications

Ratings and memberships

Sedex | Member

Company certifications

Product certifications

Product declarations

Certification for buildings

Atlas Concorde porcelain tiles and single-fired products can contribute towards earning points needed for LEED® certification.

Certifications for export to international markets*

atlasconcorde.com

cstb.fr

PORCELAIN TILES

BOOST	HEARTWOOD
BOOST BALANCE	LIMS
BOOST NATURAL	MARVEL
BOOST MINERAL	MARVEL DREAM
BOOST MIX	MARVEL GEMS
BOOST PRO	MARVEL MERAVIGLIA
BOOST STONE	MARVEL SHINE
BRAVE	MARVEL STONE
ETIC	MARVEL TRAVERTINE
ETIC PRO	MARVEL X
EXENCE	PRISM

UPEC F+ OUTDOOR ≥ 20 MM

BOOST
BOOST BALANCE
BOOST NATURAL
BOOST MINERAL
BOOST PRO
BOOST STONE
BRAVE
NORDE

CLASSIFICATION UPEC/UPEC F+ EN COURS DE CERTIFICATION

BOOST EXPRESSION
BOOST ICOR
BOOST NATURAL PRO
LOG
LOG CANSEI
MARVEL DIVA

* **Valid certification for porcelain tile and wall tiles.** - Certificazione valida per prodotti in gres porcellanato e rivestimenti.
* **Shipments can be made in accordance with national requirements anywhere in the world, even in markets with complex customs procedures such as Egypt, Morocco and Kurdistan, thanks to our active cooperation with accredited certification bodies in each country.** - Possibilità di spedizioni conformi alle prescrizioni nazionali ovunque nel mondo, anche in mercati con procedure doganali complesse come Egitto, Marocco, Kurdistan, grazie alla collaborazione sempre attiva con gli enti di certificazione accreditati in ciascun paese. - Dank unserer aktiven Zusammenarbeit mit den akkreditierten Zertifizierungsstellen in den einzelnen Ländern können die Sendungen in Übereinstimmung mit den nationalen Anforderungen überall auf der Welt versandt werden, selbst auf Märkten mit komplexen Zollverfahren wie Ägypten, Marokko und Kurdistan. - Possibilité d'expéditions conformes aux prescriptions nationales partout dans le monde, même sur les marchés dont les procédures douanières sont complexes comme l'Egypte, le Maroc ou le Kurdistan, grâce à la collaboration toujours active avec les organismes de certification homologués dans chaque pays. - Se pueden realizar envíos según la normativa nacional a cualquier parte del mundo, incluso a mercados con procedimientos aduaneros complejos como Egipto, Marruecos o Kurdistán, gracias a la cooperación permanente con los organismos de certificación acreditados en cada país. - Компания имеет возможность осуществлять поставки в любую точку мира в соответствии с национальными требованиями, даже на рынках со сложными таможенными процедурами, таких как Египет, Марокко, Курдистан, благодаря неизменно активному сотрудничеству с аккредитованными органами сертификации в каждой стране.

[1] Classificazione UPEC aggiornata al - Classement UPEC mis à jour au: January 2025
[2] Si consiglia la consultazione della pagina - On vous conseille de vous connecter à: https://database.cstb.fr/holderdetails?Uid=ETB-2094&AppRef=QB32
[3] Per ulteriori informazioni scrivere a - Pour tous renseignements complémentaires merci d'ecrire à: france@atlasconcorde.it

Sensitech

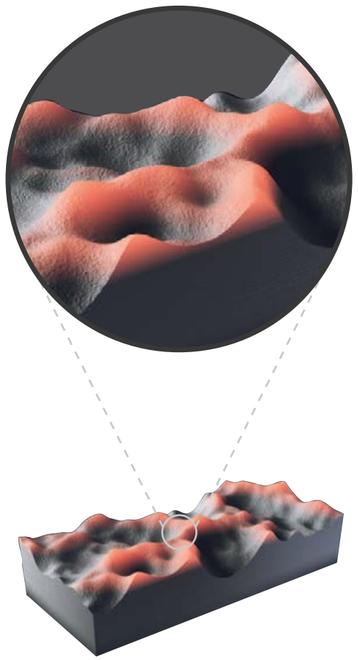

Traditional anti-slip surface

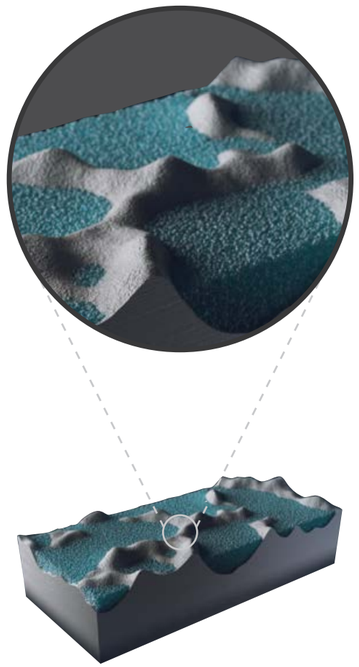

The innovative Sensitech Surface

Sensitech is the high-tech surface for indoor and outdoor settings created by Atlas Concorde Laboratories, patented in Europe. The surface combines high slip resistance performance with tactile softness. With Sensitech, the meaning of surface evolves and takes on a reassuring, pleasant and practical touch, making architectural spaces more comfortable and appealing.

Sensitech è la superficie ad alto coefficiente tecnologico per gli ambienti interni ed esterni realizzata dai Laboratori Atlas Concorde, brevettata in Europa. La superficie coniuga elevate prestazioni di resistenza allo scivolamento ad una maggiore morbidezza tattile. Con Sensitech il significato di superficie si evolve e assume un tocco rassicurante, piacevole e pratico, rendendo gli spazi architettonici sempre più confortevoli e appaganti.

Precautions for cleaning and maintenance

Precauzioni sulla pulizia e manutenzione . Hinweise zur Pflege und Reinigung . Précautions sur le nettoyage et l'entretien . Precauciones sobre la limpieza y manutención . Чистка и уход

Cleaning and maintenance procedures can be carried out using a common neutral detergent and a direct water jet: the draining power of inclined surfaces and the presence of open joints between slabs encourages the collection of dirt near the discharge points. For large surfaces, it is recommended the use of a washer-dryer and single-brush machines with soft nylon brushes. Please note that a water patina, due to the surface tension feature of liquids, will tend to form on any outdoor surface even when inclined properly. To remove this patina and obtain the complete drying of the floor, it is recommended to push the water towards joints using a scrubbing-brush or to use a wet and dry vacuum cleaner. To make square or perpendicular cuts it's best to first drill circular holes near the corners of the hole and then connect them with linear cuts, which will relax the tension at the corners of the tile. The mechanical properties indicated in the data sheet on page 148-149 refer to the whole formats in the Atlas Concorde Outdoor Catalog that have not been cut or modified.

Le operazioni di pulizia e manutenzione possono essere eseguite con un normale detergente neutro e un getto diretto di acqua: le capacità drenanti delle superfici in pendenza e la presenza di fughe aperte tra le lastre consentono infatti di convogliare lo sporco verso i punti di scarico. Per grandi superfici è consigliabile l'utilizzo di macchine lavasciuga e monospazzole con setole in nylon morbide. Si tenga inoltre presente che su qualunque superficie per esterni, seppur posata in opportuna pendenza, tende a formarsi sul bordo della superficie una leggera patina di acqua per via dell'effetto di tensione superficiale dei liquidi. Per eliminare questa patina e ottenere l'asciugatura completa e corretta del pavimento, si consiglia di spingere l'acqua con uno spazzolone verso la direzione delle fughe o di utilizzare un aspiraliquidi. Per eseguire tagli quadrati o squadri si consiglia di eseguire inizialmente fori circolari in prossimità dei vertici del taglio e collegarli in un secondo momento attraverso tagli lineari, in questo modo si avrà un rilassamento delle tensioni sui vertici della piastrella tagliata. Le caratteristiche meccaniche massive indicate nella scheda tecnica a pag. 148-149 si riferiscono ai formati interi presenti sul Catalogo Outdoor Atlas Concorde e che non abbiano subito tagli o altre trasformazioni.

Die Reinigung und Pflege kann mit einem normalen Reinigungsmittel und direktem Wasserstrahl durchgeführt werden: die Drainageleistung von geneigten Flächen und das Vorhandensein von Hohlfugen zwischen den Platten leiten den Schmutz dem Abflusssystem zu. Für große Flächen empfiehlt sich der Einsatz von Reinigungsmaschinen und Bürsten mit weichen Nylonborsten. Wir weisen auch darauf hin, dass sich auf jeder Oberfläche für den Außenbereich, auch wenn sie mit einem ausreichenden Gefälle verlegt worden ist, durch die Wirkung der Oberflächenspannung von Flüssigkeiten am Rand der Oberfläche eine dünne Wasserschicht bildet. Um diese zu beseitigen und für die vollständige und korrekte Trocknung des Bodens empfehlen wir das Wasser mit einer Bürste in Richtung Fugen zu schieben oder einen Flüssigkeitssauger zu verwenden.
Für quadratische oder lotrechte Schnitte empfiehlt es sich, zunächst an den Eckpunkten des Ausschnitts kreisförmige Bohrungen auszuführen und diese anschließend durch lineare Schnitte zu verbinden. Auf diese Weise werden die Spannungen an den Ecken der geschnittenen Fliese abgebaut. Die im Datenblatt auf Seite 148-149 aufgeführten mechanischen Eigenschaften der Fliesenmasse beziehen sich auf ganze Formate aus dem Outdoor-Katalog von Atlas Concorde, die nicht geschnitten oder anderweitig bearbeitet wurden.

Les opérations de nettoyage et d'entretien peuvent être effectué avec un détergent neutre normal et un jet d'eau direct : les capacités drainantes des surfaces en pente et la présence de joints ouverts entre les dalles permettent en effet de diriger les saletés vers les points d'évacuation. Pour des grandes surfaces, nous conseillons d'utiliser des aspirateurs nettoyeurs et des monobrosses équipées de brosses en poils nylon souples. Il convient également de noter que sur toute surface pour l'extérieur non convenablement posée en pente, une légère patine d'eau a tendance à se former à cause de l'effet de tension des liquides en surface. Pour éliminer cette patine et obtenir le séchage complet et correct du sol, nous conseillons de pousser l'eau à l'aide d'une brosse à carrelage en direction des joints ou d'utiliser un aspirateur à liquide.Pour réaliser des découpes à angle droit ou biseautées, il est conseillé de commencer par effectuer des trous circulaires en proximité des bords de la découpe, puis, dans un second temps, de les relier par des découpes linéaires, ce qui permettra d'obtenir une relaxation des contraintes au niveau des bords du carreau découpé. Les caractéristiques mécaniques massives indiquées sur la fiche technique page 148-149 se réfèrent aux formats entiers présents dans le Catalogue Outdoor Atlas Concorde qui n'ont subi aucune découpe ni autres transformations.

Las operaciones de limpieza y manutención pueden ser efectuadas con un normal detergente neutro y un chorro directo de agua: las capacidades drenantes de las superficies inclinadas y la presencia de juntas abiertas entre las losas permiten de hecho encauzar la suciedad hacia los puntos de descarga. Para grandes superficies es aconsejable el empleo de máquinas lavadora-secadora y rotativa pulidora con cerdas de nylon suaves. Además hay que tener presente que sobre cualquier superficie para exteriores, si no es colocada con una inclinación oportuna, en el borde la superficie tiende a formarse una ligera pátina de agua producto del efecto de tensión superficial de los líquidos. Para eliminar esta película y conseguir el secado completo y correcto del pavimento, se aconseja empujar el agua con una escoba en dirección de las juntas o emplear un aspira líquidos. Para realizar cortes cuadrados o rectangulares se recomienda realizar inicialmente agujeros circulares próximos a los vértices del corte y unirlos posteriormente mediante cortes lineales. De esta forma se relajan las tensiones en los vértices de la baldosa cortada. Las características mecánicas masivas indicadas en la ficha técnica de la página 148-149 se refieren a los tamaños enteros que figuran en el Catálogo Atlas Concorde Outdoor y que no han sido sujetos a cortes u otras transformaciones.

Чистку плиток можно выполнять нейтральным моющим средством и прямой струей воды: дренажные способности наклонной поверхности и наличие открытых швов между плитками обеспечивают отвод грязной воды к стокам. Для больших поверхностей рекомендуется использовать поломоечные машины или однодисковые полотеры с мягкими нейлоновыми щетками. Следует иметь в виду, что на наружных покрытиях, уложенных без надлежащего уклона, в силу явления поверхностного натяжения жидкостей может образоваться тонкая водная пленка. Для ее удаления и полного высушивания покрытия рекомендуется согнать воду щеткой-шваброй в сторону швов или использовать водос. Для выполнения квадратных или прямоугольных отверстий рекомендуется сначала просверлить круглые отверстия в каждом углу участка реза, затем соединить эти отверстия прямолинейной резкой. Это поможет ослабить напряжения по углам прорезаемого отверстия. Механические характеристики черепка плитки, указанные в технических характеристиках на стр. 148-149, относятся к целым, не подвергнутым резке или другого рода обработке форматам, представленным в каталоге Outdoor Atlas Concorde.

V-shade colour-shading

Stonalizzazione V-SHADE . Denuancement, V-SHADE . V-SHADE, Marmorierung . Contraste, V-SHADE . Цветовое отличие, V-SHADE

V1
Uniform appearance
Aspetto uniforme
Aspect uniforme
Gleichmäßiges Erscheinungsbild
Aspecto uniforme
Однородный вид

V2
Slight variation
Variazione minima
Variation minimale
Leichte Abweichung
Variación mínima
Минимальная Неоднородность

V3
Moderate variation
Variazione moderata
Variation Modérée
Mäßige Abweichung
Variación moderada
Умеренная Неоднородность

V4
Substantial variation
Variazione sostanziale
Variation substantielle
Grundlegende Abweichung
Variación sustancial
Значительная Неоднородность

The V-Shade classification indicates the colour shading level of a product, that is to say the chromatic and/or surface variation among tiles of the same collection.

La classification VShade indique le niveau de gradation du produit, c'est-à-dire de variation chromatique et/ou superficielle entre des dalles d'une même collection.

La clasificación V-Shade indica el nivel de variación de tono del producto, o de variación cromática y/o superficial que existe entre las baldosas de una misma colección.

La classificazione VShade indica il livello di stonalizzazione del prodotto, ovvero di variazione cromatica e/o superficiale che intercorre tra le piastrelle di una stessa collezione.

Die Klassifizierung V-Shade gibt das Niveau des Farbverlaufs des Produktes oder die Abweichung des Farbtons und/oder Oberfläche unter den Fliesen der gleichen Kollektion an.

Классификация V-Shade указывает на уровень цветовой или фактурной неоднородности плиток, т.е.

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

Trim Tiles / Pezzi Speciali

20 mm

			BOOST	BOOST BALANCE	BOOST EXPRESSION	BOOST ICOR	BOOST MINERAL	BOOST MIX	BOOST NATURAL	BOOST NATURAL PRO	BOOST PRO	BOOST STONE	BRAVE	ENTICE	ETIC PRO	EXENCE	LIMS	LOG	MARVEL MERAVIGLIA	MARVEL X	MARVEL TRAVERTINE	NORDE	PRISM
Lineare	**30x60 cm**	11 3/4"x23 5/8"	•					•	•		•	•					•					•	
Round	**33x120 cm**	13"x47 1/4"	•	•	•	•	•	•	•	•	•	•	•				•		•	•	•	•	•
	30x120 cm	11 3/4"x47 1/4"												•	•	•		•					
	60x90 cm	23 5/8"x35 3/8"					•															•	
	40x80 cm	15 3/4"x31 1/2"	•			•					•											•	•
	30x60 cm	11 3/4"x23 5/8"	•	•	•	•	•	•	•	•	•	•	•				•					•	
Round Angolare Dx/Sx	**33x120 cm**	13"x47 1/4"	•	•	•	•	•	•	•	•	•	•	•				•		•	•	•	•	•
	30x120 cm	11 3/4"x47 1/4"												•	•	•		•					
	60x90 cm	23 5/8"x35 3/8"					•															•	
	40x80 cm	15 3/4"x31 1/2"	•			•					•											•	•
	30x60 cm	11 3/4"x23 5/8"	•	•	•	•	•	•	•	•	•	•	•				•					•	
Round	**60x60 cm**	23 5/8"x23 5/8"	•					•	•		•	•	•				•					•	
Round Angolare	**60x60 cm**	23 5/8"x23 5/8"	•					•	•		•	•	•				•					•	
Gradino Round	**30x60 cm**	11 3/4"x23 5/8"	•	•	•	•	•	•	•	•	•	•	•				•					•	
Gradino Round Angolare Dx/Sx	**30x60 cm**	11 3/4"x23 5/8"	•	•			•	•	•	•	•	•	•				•					•	
Elemento L	**33x120 cm**	13"x47 1/4"	•	•	•	•	•	•	•	•	•	•	•				•		•	•	•	•	•
	30x120 cm	11 3/4"x47 1/4"												•				•					
	33x90 cm	13"x35 3/8"					•															•	
	33x80 cm	13"x31 1/2"	•		•	•					•											•	•
	20x60 cm	7 7/8"x23 5/8"	•					•	•		•	•	•				•			•		•	
Elemento L Angolare	**33x33 cm**	13"x13"	•	•	•	•	•	•	•	•	•	•	•				•		•	•		•	•
	20x20 cm	7 7/8"x7 7/8"	•					•	•		•	•	•				•					•	
Alzata	**30x120 cm**	11 3/4"x47 1/4"												•	•	•							
	20x120 cm	7 7/8"x47 1/4"	•	•	•	•	•	•	•	•	•	•	•				•	•	•	•	•	•	•
	20x80 cm	7 7/8"x31 1/2"	•			•					•												
	20x90 cm	7 7/8"x35 3/8"					•															•	
Top	**30x120 cm**	11 3/4"x47 1/4"	•					•	•		•	•	•	•	•	•	•		•	•	•	•	•
	30x60 cm	11 3/4"x23 5/8"	•					•	•		•	•	•				•					•	
Costa Design	**33x120 cm**	13"x47 1/4"	•					•	•		•	•	•				•			•	•	•	•
Bordo Piscina	**30x60 cm**	11 3/4"x23 5/8"	•	•	•	•	•	•	•	•	•	•	•				•					•	
Bordo Piscina Angolare Dx/Sx	**30x60 cm**	11 3/4"x23 5/8"	•	•	•	•	•	•	•	•	•	•	•				•					•	
Griglia	**20x60 cm**	7 7/8"x23 5/8"	•	•	•	•	•	•	•	•	•	•	•				•					•	
	15x60 cm	5 7/8"x23 5/8"	•	•	•	•	•	•	•	•	•	•	•				•					•	
Griglia Angolare Dx/Sx	**20x60 cm**	7 7/8"x23 5/8"	•	•	•	•	•	•	•	•	•	•	•				•					•	
	15x60 cm	5 7/8"x23 5/8"	•	•	•	•	•	•	•	•	•	•	•				•					•	
Curve	**60x60 cm**	23 5/8"x23 5/8"	•	•	•	•	•	•	•	•	•	•	•				•					•	
Smussato	**30x60 cm**	11 3/4"x23 5/8"	•	•	•	•	•	•	•	•	•	•	•				•					•	

Trim Tiles / Pezzi Speciali

LINEARE



ROUND ◆



ROUND 60 ◆



GRADINO ROUND ◆



ELEMENTO L ◆



ALZATA



TOP



COSTA DESIGN



BORDO PISCINA ◆



GRIGLIA ◆



CURVE



SMUSSATO



STEPS



Round + Alzata



Lineare + Alzata



Elemento L + Alzata

◆ Right/left angular elements are available
Sono disponibili gli elementi angolari dx/sx

9 mm Grip



Elemento L Strutturato / Grip
18,5x150 H. 4 - 7 1/4"x59" H. 1 5/8"
33x120 H. 4 - 13"x47 1/4" H. 1 5/8"
20x120 H. 4 - 7 7/8"x47 1/4" H. 1 5/8"
15x75 H. 4 - 5 7/8"x29 1/2" H. 1 5/8"
15x60 H. 4 - 5 7/8"x23 5/8" H. 1 5/8"

WOOD LOOK
Elemento L Strutturato / Grip
33x120 H. 4 - 13"x47 1/4" H. 1 5/8"

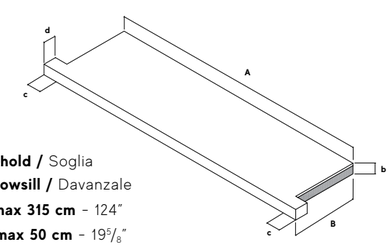

Threshold / Soglia
Windowsill / Davanzale
A L max 315 cm - 124"
B D max 50 cm - 19 5/8"
b approx. 3-5 cm - 1 1/8"-2"
c L1 0-5 cm - 0"-2"
d 4 cm - 1 5/8"
Reinforcement: continuous panel / Rinforzo: pannello continuo
Thermal conductivity of the insulation / Conducibilità termica dell'isolante 0,0323
Insulating and waterproof system / Sistema coibentante e impermeabile

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

Technical Features

20 mm

Caratteristiche tecniche . Technische Daten . Caractèristiques techniques . Características técnicas . Технические характеристики
Compliant with standards EN 14411 annex G group Bla . Conforme alla norma EN 14411 Appendice G gruppo Bla . Compliant with standards ISO 13006 annex G group Bla Conforme alla norma ISO 13006 Appendice G gruppo Bla

				Requirements for nominal size N Requisiti per dimensione nominale N			20 mm
				7 cm ≤ N < 15 cm	N ≥ 15 cm		
				(mm)	(%)	(mm)	
Regularity characteristics		**Length and width** Lunghezza e larghezza	ISO 10545-2	± 0,9 (*)	± 0,6 (*)	± 2,0 (*)	± 0,3 % ± 1,0 mm
		Thickness Spessore		± 0,5 (**)	± 5 (**)	± 0,5 (**)	± 5,0 % ± 0,5 mm
		Straightness of sides Rettilineità degli spigoli		± 0,75 (***)	± 0,5 (***)	± 1,5 (***)	± 0,3 % ± 0,8 mm
		Rectangularity (Measurement only on short edges when L/l ≥ 3) Ortogonalità (Misurazione da condurre solo sui lati corti quando L/l ≥ 3)		± 0,75 (****)	± 0,5 (****)	± 2,0 (****)	± 0,3 % ± 1,5 mm
		Surface flatness Planarità		c.c. ± 0,75	c.c. ± 0,5	c.c. ± 1,8	**Suitable for** Conforme
				e.c. ± 0,75	e.c. ± 0,5	e.c. ± 1,8	
				w. ± 0,75	w. ± 0,5	w. ± 1,8	
				EN 14411 annex G (Group Bla) EN 14411 appendice G (Gruppo Bla)	**ISO 13006 annex G (Group Bla)** ISO 13006 appendice G (Gruppo Bla)		
Structural characteristics		**Water absorption** Massa d'acqua assorbita	ISO 10545-3	**≤ 0,5% Individual Maximum 0,6%** ≤ 0,5% Valore massimo singolo 0,6%			≤ 0,1 %
			ASTM C373	**Requirement ANSI A137.1** **Water Absorption Max ≤ 0,5% ≤ 0,5%**			≤ 0,5 %
Bulk mechanical characteristics		**Breaking strength** Sforzo di rottura	ISO 10545-4	S ≥ 1300 N			S ≥ 10000 N
		Modulus of rupture Resistenza alla flessione		R ≥ 35 N/mm²			R ≥ 45 N/mm²
		Bending strength and breaking load Resistenza a flessione e al carico di rottura	EN 1339 Annex F	-			**For specific values check the table on the side** Per i valori specifici controllare la tabella a lato
		Impact resistance, as coefficient of restitution Resistenza all'impatto, espresso come coefficiente di restituzione	ISO 10545-5	**Declared value** Dichiarare un valore	**Test method available** Metodo di prova disponibile		≥ 0,55
Surface mechanical characteristics		**Resistance to deep abrasion of unglazed tiles (removed volume)** Resistenza all'abrasione profonda delle piastrelle non smaltate (volume materiale asportato)	ISO 10545-6	≤ 175 mm³			≤ 150 mm³
Thermal and hygrometric characteristics		**Coefficient of thermal linear expansion** Coefficiente di dilatazione termica lineare	ISO 10545-8	**Declared value** Dichiarare un valore	**Test method available** Metodo di prova disponibile		≤ 7 MK⁻¹
		Thermal shock resistance Resistenza agli sbalzi termici	ISO 10545-9	**Pass according to ISO 10545-1** Test superato in accordo con ISO 10545-1	**Test method available** Metodo di prova disponibile		**Resistant** Resiste
		Moisture expansion (in mm/m) Dilatazione all'umidità (in mm/m)	ISO 10545-10	**Declared value** Dichiarare un valore	**Test method available** Metodo di prova disponibile		≤ 0,01% (0,1mm/m)
		Frost resistance Resistenza al gelo	ISO 10545-12	**Pass according to ISO 10545-1** Test superato in accordo con ISO 10545-1	**Required** Metodo di prova richiesto		**Resistant** Resiste
Physical properties		**Bond strenght /adhesion for Cementitious Adhesives** Adesione mediante trazione su adesivi cementizi	EN 12004-2	**Declared value** Dichiarare un valore	-		≥ 1,0 N/mm² (Class C2 - EN 12004)
		Reaction to fire Reazione al fuoco	-	**Class A1 or A1$_{fl}$** Classe A1 oppure A1$_{fl}$	-		A1 - A1$_{fl}$
Chemical characteristics		**Resistance to household chemicals and swimming pool salts** Resistenza ai prodotti chimici di uso domestico ed agli additivi per piscina	ISO 10545-13	**Minimum Class B (UB for unglazed tiles)** Classe minima B (UB per piastrelle non smaltate)			A
		Resistance to low concentrations of acids and alkalis Resistenza a basse concentrazioni di acidi e alcali		**Declared Class** Dichiarare una Classe	**Manufacturer is to state classification** Secondo la classificazione indicata dal fabbricante		LA
		Resistance to high concentrations of acids and alkalis Resistenza ad alte concentrazioni di acidi e alcali		**Declared Class** Dichiarare una Classe	**Declared Class** Dichiarare una Classe		HA
		Resistance to staining, for unglazed tiles Resistenza alle macchie per piastrelle non smaltate	ISO 10545-14	**Declared Class** Dichiarare una Classe	**Declared Class** Dichiarare una Classe		5
Safety characteristics (•)		**Shod Ramp Test** Metodo della rampa "calzato"	DIN EN 16165 ANNEX B (EX DIN 51130)	**Declared value** Dichiarare un valore	-		R11
		Barefoot Ramp Test Metodo della rampa a piedi nudi	DIN EN 16165 ANNEX A (EX DIN 51097)	**Declared value** Dichiarare un valore	-		A+B+C
		Pendulum Friction Test Metodo del Pendolo	BS EN 16165 ANNEX C (EX BS 7976)	**PTV ≥ 36 classifies the surface as "low slip risk"**			≥ 36 Dry ≥ 36 Wet
			AS 4586	**Declared Classification of the pedestrian surface materials according to the Wet Pendulum Test**			Class P4
			UNE EN 16165 ANNEX C (EX UNE 41901 EX:2017)	**Declared value** Dichiarare un valore	-		Class C3
		Coefficient of friction (COF) Coefficiente di attrito	B.C.R.A. Rep. CEC/81	D. M. 236/89 del 14/06/89 μ >0,40 per elemento scivolante gomma dura su pavimentazione bagnata μ >0,40 per elemento scivolante cuoio su pavimentazione asciutta			> 0,40 Asciutto > 0,40 Bagnato
		Dynamic coefficient of friction (DCOF) Coefficiente di attrito dinamico	ANSI A 326,3	-			> 0,55 Wet

Physical-mechanical features in accordance with EN 1339
Caratteristiche fisiche-meccaniche secondo EN 1339

Technical feature Caratteristica tecnica	EN 1339 standard Norma EN 1339	Performance of slab Prestazione Lastra
Water absortion Assorbimento d'acqua	**Annex E** Appendice E	< 0,1%
Bending strength Resistenza alla flessione **Breaking load** Carico di rottura	**Annex F** Appendice F	**Marking/**Marcatura ≥ T11 60x60 **Marking/**Marcatura ≥ U11 80x80 **Marking/**Marcatura ≥ U4 60x90 **Marking/**Marcatura ≥ U3 30x120 **Marking/**Marcatura ≥ U4 60x120 **Marking/**Marcatura ≥ T11 120x120
Frost resistant in presence of defrosting salts Resistenza al gelo in presenza di Sali Disgelanti	**Annex D** Appendice D	**Resistant** Resiste

Mechanical features with raised installation in accordance with EN 12825
Caratteristiche meccaniche posa sopraelevata secondo EN 12825

Static load capacity Carico Statico	Average performance of slab (kN) Prestazione Media Lastra (kN)
Centre Centro	≥ 5,5 60x60x2 / ≥ 4,0 60x120x2 ≥ 7,0 kN 120x120x2
Side centre Centro Lato	≥ 5,0 kN 60x60x2 / ≥4,0 kN 60x120x2 ≥ 4,5 kN 120x120x2
Diagonal Diagonale	≥ 5,5 kN 60x60x2 / 6,0 kN 60x120x2 ≥5,5 kN 120x120x2

TBW0300824
THOMAS BELL-WRIGHT
Refer to www.tbwcert.com for validity and full documentation
Consultare www.tbwcert.com per la validità e la documentazione completa
Certified under ASTM D1929 and EN 13501-1 classification

Technical Features

9 mm

Caratteristiche tecniche . Technische Daten . Caractèristiques techniques . Características técnicas . Технические характеристики
Compliant with standards EN 14411 annex G group Bla . Conforme alla norma EN 14411 Appendice G gruppo Bla - Compliant with standards ISO 13006 annex G group Bla Conforme alla norma ISO 13006 Appendice G gruppo Bla

				Requirements for nominal size N Requisiti per dimensione nominale N			GRIP Brave, Boost, Boost Balance, Boost Expression, Boost Icor, Boost Mix, Boost Mineral, Boost Natural, Boost Natural Pro, Boost Pro, Boost Stone, Exence, Lims, Log, Log Cansei, Marvel Travertine, Norde, Prism		ROCCIA Norde
				7 cm ≤ N < 15 cm	N ≥ 15 cm				
				(mm)	(%)	(mm)			
Regularity characteristics		**Length and width** Lunghezza e larghezza	ISO 10545-2	± 0,9 (*)	± 0,6 (*)	± 2,0 (*)	Suitable for Conforme		Suitable for Conforme
		Thickness Spessore		± 0,5 (**)	± 5 (**)	± 0,5 (**)	Suitable for Conforme		Suitable for Conforme
		Straightness of sides Rettilineità degli spigoli		± 0,75 (***)	± 0,5 (***)	± 1,5 (***)	Suitable for Conforme		Suitable for Conforme
		Rectangularity (Measurement only on short edges when L/l ≥ 3) Ortogonalità (Misurazione da condurre solo sui lati corti quando L/l ≥ 3)		± 0,75 (****)	± 0,5 (****)	± 2,0 (****)	± 0,3 % ± 1,5 mm		Suitable for Conforme
		Surface flatness Planarità		c.c. ± 0,75	c.c. ± 0,5	c.c. ± 1,8	**Not applicable to "strong" structures** Non applicabile a strutturati forti		**Not applicable to "strong" structures** Non applicabile a strutturati forti
				e.c. ± 0,75	e.c. ± 0,5	e.c. ± 1,8			
				w. ± 0,75	w. ± 0,5	w. ± 1,8			
				EN 14411 annex G (Group Bla) EN 14411 appendice G (Gruppo Bla)	**ISO 13006 annex G (Group Bla)** ISO 13006 appendice G (Gruppo Bla)				
Structural characteristics		**Water absorption** Massa d'acqua assorbita	ISO 10545-3	**≤ 0,5% Individual Maximum 0,6%** - ≤ 0,5% Valore massimo singolo 0,6%			≤ 0,1 %		≤ 0,1 %
			ASTM C373	**Requirement ANSI A137.1** **Water Absorption Max ≤ 0,5% ≤ 0,5%**			≤ 0,5 %		≤ 0,5 %
Bulk mechanical characteristics		**Breaking strength** Sforzo di rottura	ISO 10545-4	S ≥ 1300 N			S ≥ 1500 N		S ≥ 1500 N
		Modulus of rupture Resistenza alla flessione		R ≥ 35 N/mm²			R ≥ 40 N/mm²		R ≥ 40 N/mm²
		Impact resistance, as coefficient of restitution Resistenza all'impatto, espresso come coefficiente di restituzione	ISO 10545-5	**Declared value** Dichiarare un valore	**Test method available** Metodo di prova disponibile		≥ 0,55		≥ 0,55
Surface mechanical characteristics		**Resistance to deep abrasion of unglazed tiles (removed volume)** Resistenza all'abrasione profonda delle piastrelle non smaltate (volume materiale asportato)	ISO 10545-6	≤ 175 mm³			≤ 150 mm³		≤ 150 mm³
Thermal and hygrometric characteristics		**Coefficient of thermal linear expansion** Coefficiente di dilatazione termica lineare	ISO 10545-8	**Declared value** Dichiarare un valore	**Test method available** Metodo di prova disponibile		≤ 7 MK⁻¹		≤ 7 MK⁻¹
		Thermal shock resistance Resistenza agli sbalzi termici	ISO 10545-9	**Pass according to ISO 10545-1** Test superato in accordo con ISO 10545-1	**Test method available** Metodo di prova disponibile		**Resistant** Resiste		**Resistant** Resiste
		Moisture expansion (in mm/m) Dilatazione all'umidità (in mm/m)	ISO 10545-10	**Declared value** Dichiarare un valore	**Test method available** Metodo di prova disponibile		≤ 0,01% (0,1mm/m)		≤ 0,01% (0,1mm/m)
		Frost resistance Resistenza al gelo	ISO 10545-12	**Pass according to ISO 10545-1** Test superato in accordo con ISO 10545-1	**Required** Metodo di prova richiesto		**Resistant** Resiste		**Resistant** Resiste
Physical properties		**Bond strenght /adhesion for Cementitious Adhesives** Adesione mediante trazione su adesivi cementizi	EN 12004-2	**Declared value** Dichiarare un valore	-		≥ 1,0 N/mm² (Class C2 - EN 12004)		≥ 1,0 N/mm² (Class C2 - EN 12004)
		Reaction to fire Reazione al fuoco	-	**Class A1 or A1$_{fl}$** Classe A1 oppure A1$_{fl}$	-		A1 - A1$_{fl}$		A1 - A1$_{fl}$
Chemical characteristics		**Resistance to household chemicals and swimming pool salts** Resistenza ai prodotti chimici di uso domestico ed agli additivi per piscina	ISO 10545-13	**Minimum Class B (UB for unglazed tiles)** Classe minima B (UB per piastrelle non smaltate)			A		A
		Resistance to low concentrations of acids and alkalis Resistenza a basse concentrazioni di acidi e alcali		**Declared Class** Dichiarare una Classe	**Manufacturer is to state classification** Secondo la classificazione indicata dal fabbricante		LA		LA
		Resistance to high concentrations of acids and alkalis Resistenza ad alte concentrazioni di acidi e alcali		**Declared Class** Dichiarare una Classe	**Declared Class** Dichiarare una Classe		HA		HA
		Resistance to staining Resistenza alle macchie	ISO 10545-14	**Declared Class** Dichiarare una Classe	**Declared Class** Dichiarare una Classe		5		5
Safety characteristics (•)		**Shod Ramp Test** Metodo della rampa "calzato"	DIN EN 16165 ANNEX B (EX DIN 51130)	**Declared value** Dichiarare un valore	-		R11 Boost, Boost Mix, Boost Balance, Boost Mineral, Boost Natural, Boost Pro, Boost Stone, Exence, Lims, Marvel Travertine, Norde, Prism	R12 Brave	R12
		Barefoot Ramp Test Metodo della rampa a piedi nudi	DIN EN 16165 ANNEX A (EX DIN 51097)	**Declared value** Dichiarare un valore	-		A+B+C Brave, Boost, Boost Balance, Boost Mineral, Boost Mix, Boost Natural, Boost Pro, Boost Stone, Exence, Lims, Marvel Travertine, Norde, Prism	-	A+B+C
		Pendulum Friction Test Metodo del Pendolo	BS EN 16165 ANNEX C (EX BS 7976)	**Declared value** Dichiarare un valore	-		PVT > 36 Dry PVT > 36 Wet		PVT > 36 Dry PVT > 36 Wet
			AS 4586	**Declared Classification of the pedestrian surface materials according to the Wet Pendulum Test**			Class ≥ P4		Class ≥ P4
			UNE EN 16165 ANNEX C (EX UNE 41901 EX:2017)	**Declared value** Dichiarare un valore	-		Class C3		Class C3
		Coefficient of friction (COF) Coefficiente di attrito	B.C.R.A. Rep. CEC/81	D. M. 236/89 del 14/06/89 μ >0,40 per elemento scivolante gomma dura su pavimentazione bagnata μ >0,40 per elemento scivolante cuoio su pavimentazione asciutta			> 0,40 Asciutto > 0,40 Bagnato		> 0,40 Asciutto > 0,40 Bagnato
		Dynamic coefficient of friction (DCOF) Coefficiente di attrito dinamico	ANSI A 326.3	-			> 0,55 Wet		> 0,55 Wet

(•) Anti-slip performance is guaranteed at the time of delivery of the product. Le prestazioni anti-slip vengono garantite al momento della consegna del prodotto.
(*) The permissible deviation, in % or mm, of the average size for each tile (2 or 4 sides) from work size (W). Deviazione ammissibile, in % oppure mm, della dimensione media di ogni piastrella (2 oppure 4 lati) dalla dimensione di fabbricazione (W).
(**) The permissible deviation, in % or mm, of the average thickness for each tile from the work size thickness (W). Deviazione ammissibile, in % oppure mm, dello spessore medio di ogni piastrella dallo spessore riportato nella dimensione di fabbricazione (W).
(***) The maximum permissible deviation from straightness, in % or mm, related to the corresponding work sizes (W). Deviazione massima ammissibile di rettilineità, in % oppure mm, in rapporto alle dimensione di fabbricazione (W) corrispondenti.
(****) The maximum permissible deviation from rectangularity, in % or mm, related to the corresponding work sizes (W). Deviazione massima ammissibile di ortogonalità, in % oppure mm, in rapporto alle dimensione di fabbricazione (W) corrispondenti.
c.c. The maximum permissible deviation from centre curvature, in % or mm, related to diagonal calculated from the work sizes (W). Deviazione massima ammissibile della curvatura del centro, in % oppure mm, in rapporto alla diagonale calcolata secondo le dimensioni di fabbricazione (W).
e.c. The maximum permissible deviation from edge curvature, in % or mm, related to the corresponding work sizes (W). Deviazione massima ammissibile della curvatura dello spigolo, in % oppure mm, in rapporto alle dimensioni di fabbricazione (W) corrispondenti.
w. The maximum permissible deviation from warpage, in % or mm, related to diagonal calculated from the work sizes (W). Deviazione massima ammissibile dello svergolamento, in % oppure mm, in rapporto alla diagonale calcolata secondo le dimensioni di fabbricazione (W).

Recommendations for raised installation

Raccomandazioni per la posa sopraelevata . Empfehlungen für die Verlegung als Doppelboden . Conseils pour la pose surélevée . Recomendaciones para la colocación sobreelevada . Рекомендации по укладке в виде фальшпола

Tiles requiring the application of the double glass-fiber net can be supplied with proper backing by Atlas Concorde. For prices of the application of the reinforcements (steel sheet and double fiberglass mesh) and of the installation accessories (pedestals, spacers, clips, etc.) see the "Atlas Concorde Outdoor Accessories" price list on MyAtlas.

Le piastrelle che richiedono l'applicazione di doppia rete in fibra di vetro sono fornite con la necessaria lavorazione da Atlas Concorde. Relativamente ai prezzi dell'applicazione dei rinforzi (foglio di acciaio e doppia rete in fibra di vetro) e degli accessori di posa (supporti, distanziatori, clip, ..) si rimanda al listino "Accessori Outdoor Atlas Concorde" disponibile su MyAtlas.

Fliesen, für die die Anwendung eines doppelten Glasfasernetz notwendig ist, werden mit dieser Bearbeitung durch Atlas Concorde geliefert. Die Preise der verstärkten Ausführungen (Stahlblatt und doppeltes Glasfasernetz) sowie der Verlege Utensilien (Träger, Distanzstücke, Clips...) finden Sie in der Preisliste „Outdoor-Zubehör Atlas Concorde" in MyAtlas.

Les carreaux qui exigent l'application d'un double treillis en fibre de verre sont fournis avec le traitement nécessaire réalisé par Atlas Concorde. En ce qui concerne les prix de l'application des renforts (feuille d'acier et double filet en fibre de verre) et les accessoires de pose (supports, entretoises, clips, etc.), nous vous prions de consulter le catalogue "Accessoires d'extérieur Atlas Concorde" disponible sur MyAtlas.

Las baldosas que requieren la aplicación de una red doble de fibra de vidrio son entregadas por Atlas Concorde con la elaboración necesaria. Para los precios de aplicación de los refuerzos (chapa de acero y doble malla de fibra de vidrio) y de los accesorios de instalación (soportes, distanciadores, clips, etc.), véase la lista de "Accesorios de Exteriores Atlas Concorde" disponible en MyAtlas.

Плитки, требующие приклеивания двойной стекловолоконной сетки, поставляются с соответствующей обработкой Atlas Concorde. Цены на упрочняющие элементы (стальной лист, двойная стекловолоконная сетка) и на аксессуары (опоры, распорки, кляммеры и т.д.) приведены в прайс-листе «Аксессуары для наружной укладки», доступном в MyAtlas.

Warning: outdoor pavings installed unglued above the ground level are subject to the action of the wind, with the risk, in some cases, of becoming airborne. The manufacturer recommends to require the assistance of a qualified professional in order to check the suitability of the installation system above the ground adopted, in accordance with the local laws and regulations and the conditions of use. Failure to do so could result in serious injury or property damage. A ceramic slab installed on a raised pedestal system may fracture on impact if a heavy object is dropped onto it from a height, with a risk of injury to anyone standing or walking on such slab. Failure to adhere to the manufacturer's instructions for installation of slabs on raised pedestal systems may result in serious injury.

Attenzione: Le pavimentazioni da esterno posate a secco in quota sono soggette all'azione del vento, con il rischio di sollevamento delle lastre. Il produttore raccomanda di far verificare l'idoneità del sistema di posa in quota da un tecnico abilitato in base alla normativa locale vigente ed alle condizionid'uso, al fine di evitare il rischio di danni a persone e cose. Una lastra ceramica posata su un sistema sopraelevato può rompersi per impatto qualora un oggetto pesante cada sulla stessa da una certa altezza, con il rischio di seri danni per chiunque possa sostare o transitare sulla piastrella stessa. Il mancato rispetto delle istruzioni fornite dal produttore relative alla posa su sistemi sopraelevati può provocare seri danni alla persone.

Warnung: Bodenbeläge die trocken im aussenbereich in der höhe verlegt werden, unterliegen der wirkung des windes, wodurch die gefahr besteht, dass die platten aufgeworfen werden. Der hersteller erteilt daher die empfehlung, dass die eignung des systems für eine verlegung in der höhe durch einen zugelassenen sachverständigen überprüft wird, wobei die lokal gültigen vorschriften und nutzungsbedingungen zu beachten sind, um die gefahr von personen- und sachschäden zu vermeiden. Eine keramikplatte die auf einem doppelbodensystem verlegt ist, kann durch den aufprall eines aus einer bestimmten höhe herabfallenden gegenstandes zerbrechen. Hier besteht das risiko schwerer verletzungen für all jene die auf der fliese gehen, oder stehen. Bei nichtberücksichtigung der vom hersteller vorgegebenen verlegevorschriften für doppelbodensysteme, kann es zu schwerwiegenden verletzungen der personen kommen.

Avertissement : les dallages extérieurs posés sans collage sont soumis à l'action du vent, avec le risque de soulèvement des plaques, notamment ceux posés aux étages d'un bâtiment. Le fabricant recommande de faire vérifier par un technicien qualifié la bonne adaptation du système de pose en étages avec la réglementation en vigueur et les conditions d'utilisation locales, afin d'éviter le risque de dommages aux personnes et aux biens. Une dalle céramique posée sur un système surélevé peut se casser à la suite d'un impact d'un objet lourd qui y chuterait d'une certaine hauteur, avec le risque de sérieux dommages pour quiconque stationnerait ou transiterait sur ce carreau. Le non respect des instructions fournies par le fabricant relatives à la pose sur des systèmes surélevés peut provoquer de sérieux dommages aux personnes.

Atención: las pavimentaciones de exteriores colocadas en seco en altura están sometidas a la acción del viento, con el riesgo del levantamiento de las losas. El productor aconseja hacer verificar la idoneidad del sistema de colocación en altura por un técnico calificado en base a la normativa local vigente y a las condiciones de uso, a fin de evitar el riesgo de daños a personas y cosas. Una losa cerámica colocada sobre un sistema elevado puede romperse producto de un impacto en caso de que un objeto pesado caiga sobre ella desde una cierta altura, con el riesgo de serios daños para cualquiera que pueda detenerse o pasar sobre dicha baldosa. No respetar las instrucciones entregadas por el fabricante respecto de la colocación sobre sistemas sobreelevados puede provocar serios daños a las personas.

Внимание: Уличные покрытия, уложенные бесклеевым способом на опоры, подвержены воздействию ветра и, как следствие, риску подъема или отрыва плиток. Поэтому, во избежание травмирования людей или повреждения имущества, система укладки для соответствующих условий эксплуатации и ее соответствие местным нормам и правилам должны быть проверены квалифицированным специалистом.
Падение тяжелого предмета с большой высоты может повлечь за собой разлом уложенной на опоры плитки с риском получения травмы для того, кто находится на плитке. Несоблюдение инструкций производителя по укладке на опоры может стать причиной серьезного травмирования.



	H UP TO ¾" (2cm)	H FROM ¾" (2cm) TO 4" (10cm)	H FROM 4" (10cm) TO 12" (30cm)	NORTH AMERICA AND OCEANIA MARKET SPECIFICATION UP TO ¾" (2cm)	ABOVE ¾" (2cm)
	H FINO A 2 CM	H DA 2 CM A 10 CM	H DA 10 CM A 30 CM	FINO A 2 CM $^3/_4$"	OLTRE AI 2CM $^3/_4$"
	H BIS 2 CM	H VON 2 BIS 10 CM	H VON 10 BIS 30 CM	BIS 2 CM	ÜBER 2 CM
	JUSQU'À 2 CM	DE 2 À 10 CM	DE 10 À 30 CM	JUSQU'À 2 CM - $^3/_4$"	AU-DELÀ DE 2 CM - $^3/_4$"
	HASTA 2 CM	DA 2 CM A 10 CM	DA 10 CM A 30 CM	HASTA 2 CM - $^3/_4$"	MÁS DE 2 CM - $^3/_4$"
	ДО 2CM	2-10 CM	10-30 CM	ДО 2 CM	БОЛЕЕ 2 CM
60x60cm - 24"x24"	4 supports (3,4 pcs/m²)	4 supports (3,4 pcs/m²)	4 supports double glass-fibre net (3,4 pcs/m²)	4 supports (0,32 pcs/sq ft)	please contact your Atlas Concorde sales representative
	4 supporti (3,4 pz/m²)	4 supporti (3,4 pz/m²)	4 supporti + doppia rete in fibra di vetro (3,4 pz/m²)	4 supporti (0,32 pz/m²)	contattare il referente commerciale Atlas Concorde
	4 Träger (3,4 St/m²)	4 Träger (3,4 St/m²)	4 Träger + doppeltes Glasfasernetz (3,4 St/m²)	4 Träger (0,32 St/m²)	bitte kontaktieren sie den handelsvertreter von Atlas Concorde
	4 supports (3,4 pc/m²)	4 supports (3,4 pc/m²)	4 supports + double treillis fibre de verre (3,4 pc/m²)	4 support (0,32 pcs/m²)	contacter le représentant d'Atlas Concorde
	4 pedestales (3,4 pz/m²)	4 pedestales (3,4 pz/m²)	4 pedestales + doble red de fibra de vidrio (3,4 pz/m²)	4 pedestales (0,32 pzas/m²)	ponerse en contacto con el agente de Atlas Concorde
	4 опор (3,4 шт./м²)	4 опор (3,4 шт./м²)	4 опор + двойная стекловолоконная сетка (3,4 шт./м²)	4 опор (0,32 шт./м²)	обратитесь к представителю Atlas Concorde
60x90cm - 24"x36"	6 supports (4,8 pcs/m²)	6 supports (4,8 pcs/m²) double glass-fibre net	6 supports (4,8 pcs/m²) double glass-fibre net	6 supports (0,48 pcs/sq ft)	please contact your Atlas Concorde sales representative
	6 supporti (4,8 pz/m²)	6 supporti + doppia rete in fibra di vetro (4,8 pz/m²)	6 supporti + doppia rete in fibra di vetro (4,8 pz/m²)	6 supporti (0,48 pz/m²)	contattare il referente commerciale Atlas Concorde
	6 Träger (4,8 St/m²)	6 Träger + doppeltes Glasfasernetz (4,8 St/m²)	6 Träger + doppeltes Glasfasernetz (4,8 St/m²)	6 Träger (0,48 St/m²)	bitte kontaktieren sie den handelsvertreter von Atlas Concorde
	6 supports (4,8 pcs/m²)	6 supports + double treillis fibre de verre (4,8 pz/m²)	6 supports + double treillis fibre de verre (4,8 pc/m²)	6 supports (0,48 pcs/m²)	contacter le représentant d'Atlas Concorde
	6 pedestales (4,8 pz/m²)	6 pedestales + doble red de fibra de vidrio 4,8 pz/m²)	6 pedestales + doble red de fibra de vidrio (4,8 pz/m²)	6 pedestales (0,48 pzas/m²)	ponerse en contacto con el agente de Atlas Concorde
	6 опор (4,8 шт./м²)	6 опор + двойная стекловолоконная сетка (4,8 шт./м²)	6 опор + двойная стекловолоконная сетка (4,8 Шт./м²)	6 опор (0,48 шт./м²)	обратитесь к представителю Atlas Concorde
80x80 cm - 31$^1/_2$"x31$^1/_2$"	4 supports (2 pcs/m²)	4 supports double glass-fibre net (2 pcs/m²)	4 supports double glass-fibre net (2 pcs/m²)	4 supports (0,2 pcs/sq ft)	please contact your Atlas Concorde sales representative
	4 supporti (2 pz/m²)	4 supporti + doppia rete in fibra di vetro (2 pz/m²)	4 supporti + doppia rete in fibra di vetro (2 pz/m²)	4 supporti (0,2 pz/m²)	contattare il referente commerciale Atlas Concorde
	4 Träger (2 St/m²)	4 Träger + doppeltes Glasfasernetz (2 St/m²)	4 Träger + doppeltes Glasfasernetz (2 St/m²)	4 Träger (0,2 St/m²)	bitte kontaktieren sie den handelsvertreter von Atlas Concorde
	4 supports (2 pcs/m²)	4 supports + double treillis fibre de verre (2 pz/m²)	4 supports + double treillis fibre de verre (2 pz/m²)	4 support (0,2 pcs/m²)	contacter le représentant d'Atlas Concorde
	4 pedestales (2 pz/m²)	4 pedestales + doble red de fibra de vidrio (2 pz/m²)	4 pedestales + doble red de fibra de vidrio (2 pz/m²)	4 pedestales (0,2 pzas/m²)	ponerse en contacto con el agente de Atlas Concorde
	4 опор (2 шт./м²)	4 опор + двойная стекловолоконная сетка (2 шт./м²)	4 опор + двойная стекловолоконная сетка (2 шт./м²)	4 опор (0,2 шт./м²)	обратитесь к представителю Atlas Concorde
30x120 cm - 12"x48"	6 supports (7,0 pcs/m²)	6 supports double glass-fibre net (7,0 pcs/m²)	6 supports double glass-fibre net (7,0 pcs/m²)	6 supports (0,65 pcs/sq ft)	please contact your Atlas Concorde sales representative
	6 supporti (7,0 pz/m²)	6 supporti + doppia rete in fibra di vetro (7,0 pz/m²)	6 supporti + doppia rete in fibra di vetro (7,0 pz/m²)	6 supporti (0,65 pz/m²)	contattare il referente commerciale Atlas Concorde
	6 Träger (7,0 St/m²)	6 Träger + doppeltes Glasfasernetz (7,0 St/m²)	6 Träger + doppeltes Glasfasernetz (7,0 St/m²)	6 Träger (0,65 St/m²)	bitte kontaktieren sie den handelsvertreter von Atlas Concorde
	6 supports (7,0 pc/m²)	6 supports + double treillis fibre de verre (7,0 pc/m²)	6 supports + double treillis fibre de verre (7,0 pc/m²)	6 support (0,65 pcs/m²)	contacter le représentant d'Atlas Concorde
	6 pedestales (7,0 pz/m²)	6 pedestales + doble red de fibra de vidrio (7,0 pz/m²)	6 pedestales + doble red de fibra de vidrio (7,0 pz/m²)	6 pedestales (0,65 pzas/m²)	ponerse en contacto con el agente de Atlas Concorde
	6 опор (7,0 шт./м²)	6 опор + двойная стекловолоконная сетка (7,0 шт./м²)	6 опор + двойная стекловолоконная сетка (7,0 шт./м²)	6 опор (0,65 шт./м²)	обратитесь к представителю Atlas Concorde
60x120 cm - 24"x48"	6 supports (3,4 pcs/m²)	6 supports double glass-fibre net (3,4 pcs/m²)	6 supports double glass-fibre net (3,4 pcs/m²)	6 supports (0,32 pcs/sq ft)	please contact your Atlas Concorde sales representative
	6 supporti (3,4 pz/m²)	6 supporti + doppia rete in fibra di vetro (3,4 pz/m²)	6 supporti + doppia rete in fibra di vetro (3,4 pz/m²)	6 supporti (0,32 pz/m²)	contattare il referente commerciale Atlas Concorde
	6 Träger (3,4 St/m²)	6 Träger + doppeltes Glasfasernetz (3,4 St/m²)	6 Träger + doppeltes Glasfasernetz (3,4 St/m²)	6 Träger (0,32 St/m²)	bitte kontaktieren sie den handelsvertreter von Atlas Concorde
	6 supports (3,4 pcs/m²)	6 supports + double treillis fibre de verre (3,4 pcs/m²)	6 supports + double treillis fibre de verre (3,4 pcs/m²)	6 support (0,32 pcs/m²)	contacter le représentant d'Atlas Concorde
	6 pedestales (3,4 pcs/m²)	6 pedestales + doble red de fibra de vidrio (3,4 pcs/m²)	6 pedestales + doble red de fibra de vidrio (3,4 pcs/m²)	6 pedestales (0,32 pzas/m²)	ponerse en contacto con el agente de Atlas Concorde
	6 опор (3,4 шт./м²)	6 опор + двойная стекловолоконная сетка (3,4 шт./м²)	6 опор + двойная стекловолоконная сетка (3,4 шт./м²)	6 опор (0,32 шт./м²)	обратитесь к представителю Atlas Concorde
120x120 cm - 48"x48"	8 supports (2,7 pcs/m²)	8 supports double glass-fibre net (2,7 pcs/m²)	8 supports double glass-fibre net (2,7 pcs/m²)	8 supports (0,27 pcs/sq ft)	please contact your Atlas Concorde sales representative
	8 supporti (2,7 pz/m²)	8 supporti + doppia rete in fibra di vetro (2,7 pz/m²)	8 supporti + doppia rete in fibra di vetro (2,7 pz/m²)	8 supporti (0,27 pz/m²)	contattare il referente commerciale Atlas Concorde
	8 Träger (2,7 St/m²)	8 Träger + doppeltes Glasfasernetz (2,7 St/m²)	8 Träger + doppeltes Glasfasernetz (2,7 St/m²)	8 Träger (0,27 St/m²)	bitte kontaktieren sie den handelsvertreter von Atlas Concorde
	8 supports (2,7 pcs/m²)	8 supports + double treillis fibre de verre (2,7 pcs/m²)	8 supports + double treillis fibre de verre (2,7 pcs/m²)	8 support (0,27 pcs/m²)	contacter le représentant d'Atlas Concorde
	8 pedestales (2,7 pcs/m²)	8 pedestales + doble red de fibra de vidrio (2,7 pcs/m²)	8 pedestales + doble red de fibra de vidrio (2,7 pcs/m²)	8 pedestales (0,27 pzas/m²)	ponerse en contacto con el agente de Atlas Concorde
	8 опор (2,7 шт./м²)	8 опор + двойная стекловолоконная сетка (2,7 шт./м²)	8 опор + двойная стекловолоконная сетка (2,7 шт./м²)	8 опор (0,27 шт./м²)	обратитесь к представителю Atlas Concorde

Any damaged parts must be replaced immediately. Before installing any outdoor surface, the slope to be applied to the pavement should be carefully assessed according to the project requirements and intended use.
È necessario sostituire immediatamente i pezzi eventualmente danneggiati. Prima della realizzazione di ogni superficie in esterno occorre valutare con attenzione la pendenza necessaria da applicare alla pavimentazione in funzione delle esigenze di progetto e della destinazione d'uso. Eventuelle schadhafte Fliesen sind sofort zu ersetzen. Vor der Verlegung jeglichen Außenbelags ist das notwendige, dem Boden zu verleihende Gefälle sorgfältig auf Grundlage der Projektanforderungen und der Zweckbestimmung zu definieren. Il est nécessaire de remplacer immédiatement toutes les pièces qui seraient éventuellement endommagées. Avant de réaliser la pose de carreaux en extérieur, il faut évaluer attentivement la pente nécessaire à appliquer au dallage en fonction des exigences du projet et de la destination d'usage. Cualquier pieza dañada debe sustituirse inmediatamente. Antes de realizar una superficie de exterior, es necesario evaluar cuidadosamente la inclinación necesaria a aplicar al pavimento en función de los requisitos del proyecto y del uso previsto.
Поврежденные плитки должны быть немедленно заменены. Перед укладкой плитки на улице необходимо внимательно рассчитать уклон покрытия с учетом его функционального назначения и требований проекта.

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

Packing

Imballi . Verpackung . Packaging . Packaging . Упаковка

	Pieces x box Pezzi x scatola Stück pro Karton Pièces par boîte Piezas por caja Штук в коробке	**M² x box** M² x scatola M² pro Karton M² par boîte M² por caja Кв.м в коробке	**Boxes x pallet** Scatole x pallet Kartons pro Palette Boîtes par palette Cajas por pallet Коробок на поддоне	**Kg x box** Kg x scatola Kg pro Karton Kg par boîte Kg por caja кг в коробке	**M² x pallet** M² x pallet M² pro Palette M² par palette M² por pallet Кв.м на поддоне	**Kg x pallet** Kg x pallet Kg pro Palette Kg par palette Kg por pallet кг в поддоне
20 mm						
60x60	2	0,72	30	33,00	21,60	990,00
80x80	1	0,64	42	29,70	26,88	1.247,40
60x90	2	1,08	24	48,50	25,92	1.149
30x120	2	0,72	36	33,00	25,92	1.188,00
60x120	1	0,72	35	33,35	25,20	1.167,25
120x120	1	1,44	20	67,66	28,80	1.353,20
9 mm						
30x60	7	1,26	40	24,85	50,40	994,00
60x120	2	1,44	35	30,00	50,40	1.050,00
18,5x150	4	1,11	40	23,68	44,40	947,20
120x120	2	2,88	20	58,00	57,60	1.160,00
20x120	6	1,44	32	31,10	46,08	995,2

INDEX
SIZE INDEX
SURFACE RANGE
IMAGE GALLERY
PRODUCT RANGE
TECHNICAL SPECIFICATIONS

Outdoor porcelain tiles: a safe choice.

VERSATILE
Versatile

RESISTANT TO SALT
Resistente al sale

ZERO PVC
Zero PVC

ECO-FRIENDL
Rispetta l'ambiente

LONG LASTING
Dura a lungo

SAFE
Sicuro

RESISTANT TO THERMAL SHOCK
Resiste agli sbalzi termici

HIGH BREAKAGE LOAD
Resiste ai carichi di rottura

EASY TO CLEAN AND TO INSTALL
Facile da pulire e posare

RESISTANT TO MOULD, MOSS, PESTICIDES
Resiste alla muffa, muschio, persticidi

FIREPROOF FROSTPROOF
Resistente al fuoco e al gelo

DISCOVER MORE

atlas concorde

Ceramiche Atlas Concorde S.p.A.
Via Canaletto 141
41042 Spezzano di Fiorano (MO) – Italia

Copyright 2025 by Ceramiche Atlas Concorde S.p.A
(41042 Spezzano di Fiorano (MO) – Italia)
January 2025

atlas concorde

atlasconcorde.com